
NORLYS LONDON 485

AC 220-240V 50-60Hz | IP 54 | IK 07 | E27

London 485XX0010
16.09.2026 v.10.6
www.norlys.no



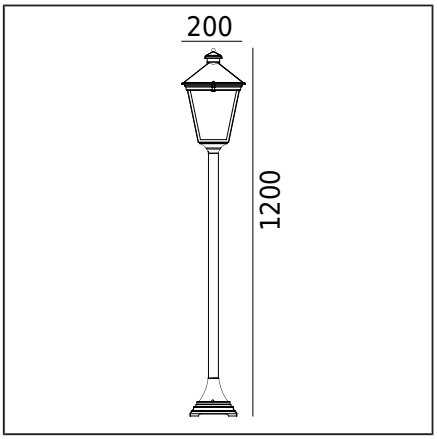

Type of luminaire

Type of luminaire	Post light fixture.
Photometric body	Light discovered
Characteristics of the luminaire	Classic design luminaire. For lighting gardens, terraces and other architectural concepts.

General information

Materials	Powder painted aluminum cast. Lens - clear polycarbonate, UV stabilized. EPDM cable gland.
Mounting method	Fixing of the luminaire: 2 holes ø5,5mm, spacing 90mm.
Terminal	Connection terminals: max 2x2,5mm²,possibility to connect luminaire in loop max 2x2,5mm². A round wire in the isolation with a diameter of ø7...10,5mm.
Type of light source	Lamp E27 A55...A60 Replaceable light source by an end-user.
Luminaire weight net / gross	3,6kg / 4kg
Box dimensions [cm]	24,5cm x 23cm x 82cm
Luminaire dimensions [cm]	20cm x 20cm x 120cm

Technical data

Lamp E27	LED A55..60
Light source wattage	LED max 9W
Luminaire wattage	LED max 9W
Ta Rated temperature	+25°C
Ambient operating temp. range	-20...+45°C

The possibility to order the luminaire along with the Philips Master LEDbulb E27 type 806lm/8.5W/2700K (dimmable) LED lamp.

Accessories sold separately

307ZX0009	Concreting anchor

Spare parts

0904800051	Lampshade - service kit

Files to download

Manual

Indexes

Index	Color	RAL
485BL	BLACK	9005
485WH	WHITE	9003

Other colors according to the "Colors Template" pattern book - available on request, subject to agreement with Norlys' Sales Department.

Norlys AS
P.B 1014 Hoff, 0218
Oslo
Hovfaret 4B, 0275
Oslo
Norway
+47 24 12 40 11
firmapost@norlys.no

TÜVRheinland CERTIFIED — Management System ISO 9001:2015 IATF 16949:2016 — www.tuv.com ID 9108651873

PCC Cert CERTIFICATE ISO 14001

RoHS 2011/65/UE

Please read the manual before installing. Due to the dynamic development of lighting technology, additional information is available upon request. LED module must be replaced by a qualified person in accordance with applicable regulations. Condensation, which can occur in luminaires, is a natural phenomenon and does not impair the quality of the luminaire.