


NORLYS ARVIKA 891

Arvika 891XX0013
02.11.2026 v.13.18
www.norlys.no



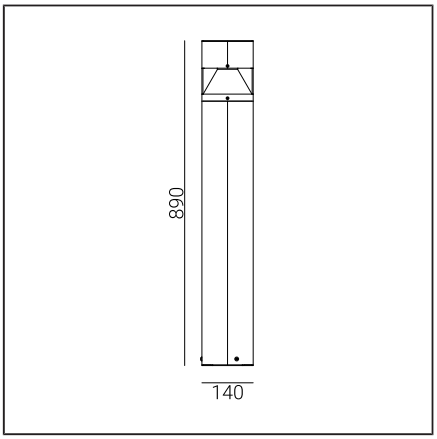

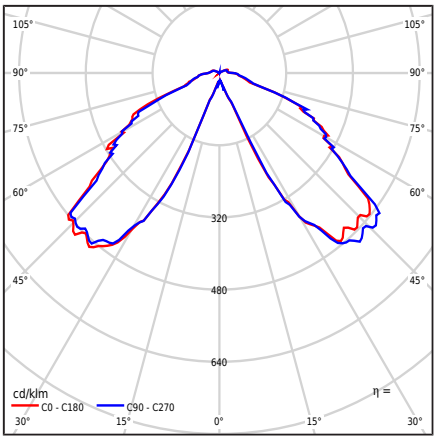

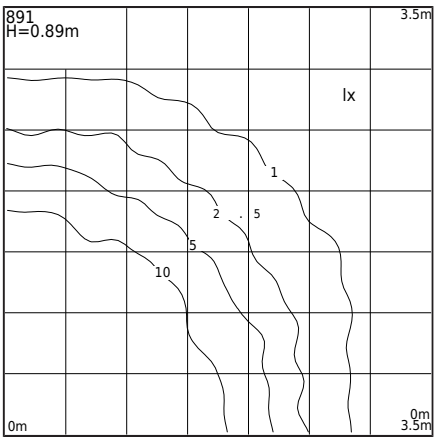

Type of luminaire

Type of luminaire	Post light fixture.
Photometric body	Four side light distribution covered from the top.
Characteristics of the luminaire	Bollard luminaire for lighting private areas, gardens and other architectural concepts

General information

Materials	Hot-dip galvanized steel. Hot-dip galvanized and powder-coated steel. Lens - clear polycarbonate, UV stabilized. Silicone gasket.
Mounting method	Fixture mounting: 3 holes with ø9mm on a diameter of ø85mm at 120°. Other accessories must be purchased separately.
Terminal	Connection terminals: max 3x4mm², possibility to loop the fixture max 3x4mm². Cable in a round sheath with diameter: ø8...12mm or ø10...13.6mm.
Type of light source	LED module, electronic power supply Replaceable (LED only) light source by a professional. Replaceable control gear by a professional.
Light control	Non-dimmable fixture
Luminaire weight net / gross	8,6kg / 9,1kg
Box dimensions [cm]	16cm x 16cm x 93cm
Luminaire dimensions [cm]	14cm x 14cm x 89cm

Technical data

LED module	Cree DK210704 V2 JB2835 3V 3K (Datasheet)
Driver	Yes
Driver durability	50000h
Light source wattage	7,4W
Luminaire wattage	8,8W
Lamp luminous flux	1370lm
Luminaire luminous flux	543lm
Efficiency of the luminaire	61,7lm/W
ULOR	0%
Color temperature	3000K
Colour consistency (McAdam ellipse)	SDCM3
Colour rendering index CRI	80
L80TM-21 [wg LM-80]	>102 000h
L90 TM-21 [wg LM-80]	>52 600h
Power Factor luminaire	PF 0,98
Ta Rated temperature	+25°C
Ambient operating temp. range	-20...+45°C
This product contains light source of energy efficiency class C / EPREL	
BUG rating	B0-U1-G0
Comment	The declared IP protection rating for the Arvika Norlys product applies only when the doors covering the electrical sockets are completely closed. During rainfall, it is not allowed to use the sockets, connect devices to them, or leave the doors open. The doors should always be properly closed after use. Before installation, local regulations and requirements for the installation and use of lighting fixtures equipped with electrical sockets should be checked. The possibility of safe installation and operation of the product should be consulted with a person holding appropriate electrical qualifications.

Accessories sold separately

208ZX0009	Concreting anchor
207GA0010	Adapter for concrete foundation

Spare parts

ZS891zx0013	Repair kit.

Norlys AS
P.B 1014 Hoff, 0218
Oslo
Hovfaret 4B, 0275
Oslo
Norway
+47 24 12 40 11
firmapost@norlys.no

TÜVRheinland CERTIFIED
Management System ISO 9001:2015 IATF 16949:2016
www.tuv.com ID 9108651873
PCC Cert CERTIFICATE ISO 14001
RoHS 2011/65/UE

ARVIKA 891

Files to download

Photometric LDT files	Photometric IES files
Manual	

Indexes

Index	Color	RAL
891BL	BLACK	9005
891GA	HOT-DIP GALVANIZING	-

Other colors according to the "Colors Template" / RAL pattern book - available on request, subject to agreement with Norlys' Sales Department.

Norlys AS
P.B 1014 Hoff, 0218
Oslo
Hovfaret 4B, 0275
Oslo
Norway
+47 24 12 40 11
firmapost@norlys.no