
KOSTER DOUBLE HEAD 1177

Koster double head
1177XX0009
02.11.2026 v.09.16
www.norlys.no



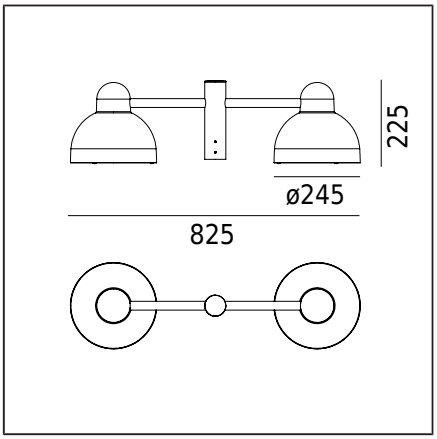

Type of luminaire

Type of luminaire	Pole luminaire.
Photometric body	Single-sided light: symmetrical, directed downward.
Characteristics of the luminaire	Top-mounted luminaire, designed to be mounted on a lighting pole with a Ø60mm mounting shaft

General information

Materials	Powder painted aluminum cast. Lens - transparent polycarbonate with structure, UV stabilized.
Mounting method	Mounting of the luminaire: luminaire adapted to a ø60mm pole, depth 80mm
Terminal	H05VV-F 2G1 cable, 3.7m long, for connection inside the pole lighting (in a properly selected electrical installation box)
Type of light source	LED Lamp E27 A55...A60 Replaceable light source by an end-user.
Luminaire weight net / gross	6,38kg / 6,92kg
Box dimensions [cm]	87cm x 29cm x 27cm
Luminaire dimensions [cm]	82,5cm x 24,5cm x 22,5cm
Side area of luminaire	0,2m^2

Technical data

E27 Lamps	LED A55..60
Light source wattage	2x LED max 9W
Luminaire wattage	2x LED max 9W
ULOR	0%
Ambient operating temp. range	-20...+45°C

Optionally, the luminaire is also available:
- For a different color of the luminaire (according to the RAL color palette)
Terms of sale and other information after contact with the Sales Department of Norlys

Spare parts

06710000	Lampshade - service kit

Files to download

Manual

Indexes

Index	Color	RAL
1177AL	ALUMINUM	9006
1177GR	GRAPHITE	7016

Other colors according to the "Colors Template" / RAL pattern book - available on request, subject to agreement with Norlys' Sales Department.

Norlys AS
P.B 1014 Hoff, 0218
Oslo
Hovfaret 4B, 0275
Oslo
Norway
+47 24 12 40 11
firmapost@norlys.no

Management System ISO 9001:2015 IATF 16949:2016
www.tuv.com ID 9108651873
CERTIFICATE ISO 14001
RoHS 2011/65/UE

Before the assembly, read the instructions attached to the luminaire. Installation and service work is carried out by a person with appropriate authorizations and qualifications, in accordance with applicable regulations. Condensation that may occur in the luminaires is a natural phenomenon and does not affect the quality of the luminaire