
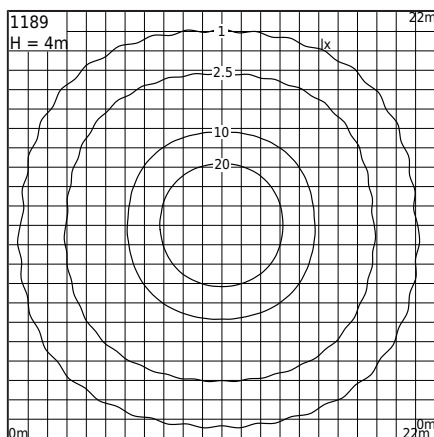
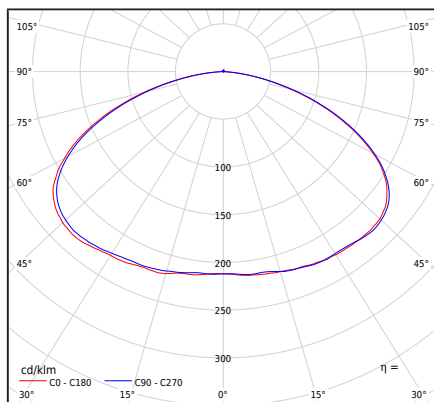


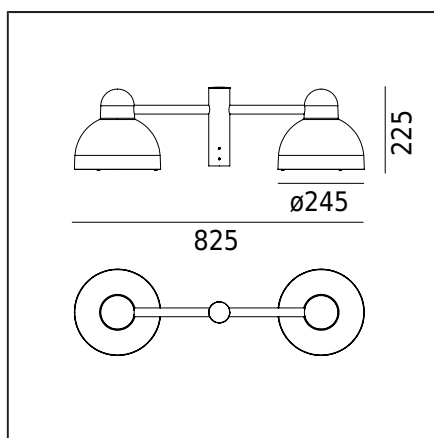

Type of luminaire

Type of luminaire	Pole luminaire.
Photometric body	Lens from Ledil type VSM (IESNA type V)
Characteristics of the luminaire	Top-mounted luminaire, designed to be mounted on a lighting pole with a Ø60mm mounting shaft

General information

Materials	Powder painted aluminum cast. Lens - transparent polycarbonate with structure, UV stabilized.
Mounting method	Mounting of the luminaire: luminaire adapted to a Ø60mm pole, depth 80mm
Terminal	H05VV-F 2G1 cable, 3.7m long, for connection inside the lighting pole (in a properly selected electrical installation box)
Type of light source	LED module, electronic power supply Replaceable (LED only) light source by a professional. Replaceable control gear by a professional.
Light control	Phase-dimming (TRIAC) TRAILING EDGE (TE) - LEADING EDGE (LE)
Net / gross weight of luminaire	6,38kg / 8,37kg
Box dimensions [cm]	87cm x 29cm x 27cm
Luminaire dimensions [cm]	82,5cm x 24,5cm x 22,5cm
Side area of luminaire	0,2m ²

Technical data

Luminaire wattage	34W
Luminaire luminous flux	3624lm
Efficiency of the luminaire	106,6lm/W
Color temperature	4000K
Colour consistency (McAdam ellipse)	SDCM3
Rated life time L70/B50 at 25°C	>100 000h
Rated life time L80/B20 at 25°C	>100 000h
Ambient temperature	Ta max=+65°C

This product contains light sources of energy efficiency class **A** / **D** / **EPREL**

Optionally, the luminaire is also available:

- For LED color 2200K/2700K
 - For a different luminous flux value
 - For a different color of the luminaire (according to the RAL color palette)
- Terms of sale and other information after contact with the Sales Department of Norlys

Inrush current	10A/50ms
BUG rating	B2-U2-G1

Spare parts

06710000	Lampshade.
0918340001	Electric set.

Files to download

Photometric LDT files	Photometric IES files
Manual	

Indexes

Index	Color	RAL
1189AL	ALUMINUM	9006
1189GR	GRAPHITE	7016