
NORLYS ARENDAL 1250

AC 220-240V 50-60Hz | IP 65 | IK 06 | E14

Arendal 1250XX0010
16.09.2026 v.10.5
www.norlys.no



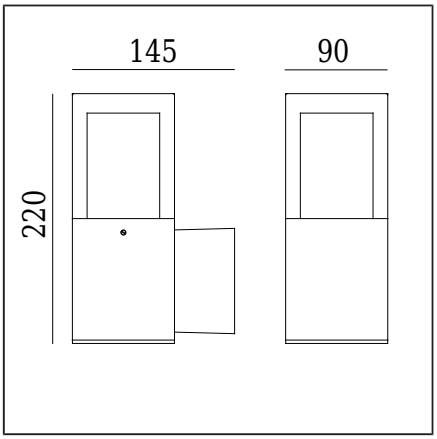

Type of luminaire

Type of luminaire	Wall light,
Photometric body	Light discovered
Characteristics of the luminaire	A modern design fitting with a combination of a decorative crystal shade with a durable and stable fixture housing.

General information

Materials	Powder painted aluminum cast. Lens - crystal glass, satin inside. The lampshade may take on an amber color over time. Nylon6 cable gland.
Mounting method	Fixture mounting: 2 holes ø5mm, spacing 34x54mm.
Terminal	Connection terminals: max 2x2.5mm², possibility to connect the fixture in a loop max 2x1.5mm². Cable in a round sheath with a maximum diameter of ø12.5mm.
Type of light source	E14 Lamp Replaceable light source by an end-user.
Luminaire weight net	2,3kg
Box dimensions [cm]	27cm x 11cm x 20,5cm

Technical data

E14 Bulb	QB35 / LED B35
Light source wattage	max 46W / LED 6W
ULOR	75%
Ambient operating temp. range	-20...+45°C

Files to download

Manual

Indexes

Index	Color	RAL
1250BL	BLACK	9005
1250GR	GRAPHITE	7016

Other colors according to the "Colors Template" pattern book - available on request, subject to agreement with Norlys' Sales Department.

Norlys AS
P.B 1014 Hoff, 0218
Oslo
Hovfaret 4B, 0275
Oslo
Norway
+47 24 12 40 11
firmapost@norlys.no

TÜVRheinland CERTIFIED
Management System ISO 9001:2015 IATF 16949:2016
www.tuv.com ID 9108651873

PCC Cert CERTIFICATE ISO 14001

RoHS 2011/65/UE

Before starting the installation, please familiarize yourself with the instructions provided with the fixture. Due to the dynamic development of lighting technology, additional information is available upon customer request. Information on recommended light sources is based on manufacturers' data from 2016. We do not take responsibility for the completeness and validity of the offer, therefore we refer to the applicable technical information from the light source manufacturers. Condensation that may occur in the fixtures is a natural phenomenon and does not affect the quality of the fixture.