

NORLYS ARENDAL 1252

Arendal 1252XX0010
16.09.2026 v.10.4
www.norlys.no



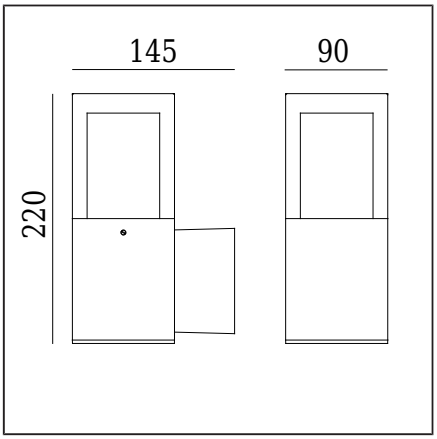

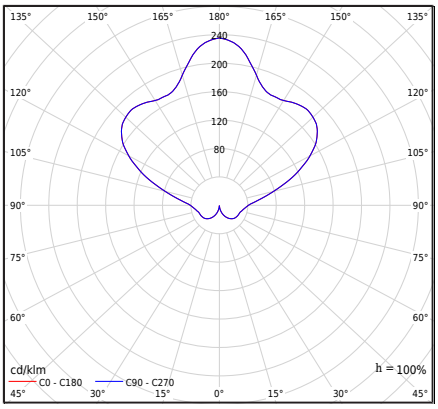

Type of luminaire

Type of luminaire	Wall light,
Photometric body	Light discovered
Characteristics of the luminaire	A fixture with modern design, which uses a combination of a decorative crystal shade with a durable and stable fixture housing.

General information

Materials	Powder painted aluminum cast. Lens - crystal glass, satin inside. The lampshade may take on an amber color over time. Nylon6 cable gland.
Mounting method	Mounting the fixture: 2 holes ø5mm, spacing 34x54mm.
Terminal	Connection terminals: max 2x2.5mm², possibility of looping the fixture max 2x1.5mm² Cable in a round sheath with a diameter of max ø12.5mm.
Type of light source	LED module AC integrated Replaceable (LED only) light source by a professional.
Light control	Phase-dimming (TRIAC) TRAILING EDGE (TE) - LEADING EDGE (LE)
Luminaire weight net / gross	2,37kg / 2,62kg
Box dimensions [cm]	24cm x 15,5cm x 11,5cm
Luminaire dimensions [cm]	22cm x 14,5cm x 9cm

Technical data

LED module	Lumens EDC 38C 4W xxx 230V A101 4K (Datasheet)
External control	Phase dimmer Lumens LED AC (User manual)
Light source wattage	4W
Luminaire wattage	4W
Lamp luminous flux	439lm
Luminaire luminous flux	330lm
Efficiency of the luminaire	82,5lm/W
ULOR	83%
Color temperature	4000K
Colour consistency (McAdam ellipse)	SDCM3
Colour rendering index CRI	80
L70TM-21 [wg LM-80]	>59 000h
Power Factor luminaire	PF 0,95
Ta Rated temperature	+25°C
Ambient operating temp. range	-20...+45°C
This product contains light source of energy efficiency class A E / EPREL	
Inrush current	17mA / 60ms

Spare parts

ZS1252zx0010	Service set.

Files to download

Manual

Indexes

Index	Color	RAL
1252BL	BLACK	9005
1252GR	GRAPHITE	7016

Other colors according to the "Colors Template" pattern book - available on request, subject to agreement with Norlys' Sales Department.

Norlys AS
P.B 1014 Hoff, 0218
Oslo
Hovfaret 4B, 0275
Oslo
Norway
+47 24 12 40 11
firmapost@norlys.no

Management System ISO 9001:2015 IATF 16949:2016
TÜVRheinland CERTIFIED
www.tuv.com ID 9108651873

PCC Cert CERTIFICATE ISO 14001

RoHS 2011/65/UE

Before starting the installation, please read the instructions included with the fixture. Due to the dynamic development of lighting technology, additional information is provided upon customer request. Replacement of the LED module is only possible through Norlys professional service. Condensation that may occur in luminaires is a natural phenomenon and does not affect the quality of the fixture.