
NORLYS LAMPPOST 1255

AC 220-240V 50-60Hz

LAMPPOST
1255XX0009
29.10.2026 v.09.14
www.norlys.no



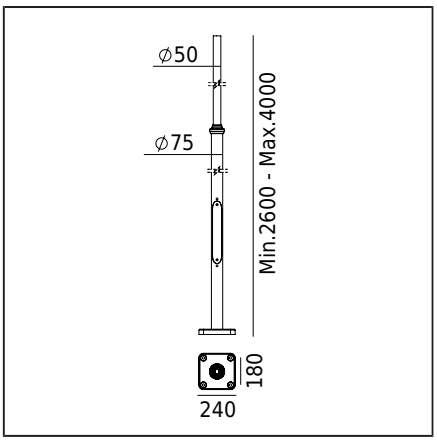

Type of accesory

Type of accessory	Lighting pole.
Characteristics of the accessory	Street lighting pole designed for traffic areas - parks, gardens, sidewalks, paths, squares, private areas, public utility areas. Complies with the standards: EN 40-31; EN 40-3-3.

General information

Materials	Powder painted aluminum cast.
Mounting method	Mounting the pole using anchoring elements: 4 holes ø16.5mm, 180mm spacing in a square. Fits concrete base B-50.
Terminal	Connection terminal: for cable max 3x4mm². Cable in a round sheath with a maximum diameter of ø12.5mm. Pole equipped with: inspection door, PE cable connection.
Rodzaj słupa	Telescopic pole
Pole weight net / gross	8,85kg / 10,25kg
Box dimensions [cm]	210cm x 25cm x 25cm
Pole dimensions [cm]	400cm x 24cm x 24cm

Accessories sold separately

3070XX0009	Reduction
3091GA0009	Concreting anchor

Files to download

Manual

Indexes

Index	Color	RAL
1255AL	ALUMINUM	9006
1255BL	BLACK	9005
1255GR	GRAPHITE	7016
1255WH	WHITE	9003

Other colors according to the "Colors Template" / RAL pattern book - available on request, subject to agreement with Norlys' Sales Department.

Norlys AS
P.B 1014 Hoff, 0218
Oslo
Hovfaret 4B, 0275
Oslo
Norway
+47 24 12 40 11
firmapost@norlys.no

TÜVRheinland CERTIFIED Management System ISO 9001:2015 IATF 16949:2016 www.tuv.com ID 9108651873

PCC Cert CERTIFICATE ISO 14001

RoHS 2011/65/UE