


# NORLYS VASA 127

AC 220-240V 50-60Hz | IP 65 | IK 08 | E27 LED | DIM

Vasa 127XX0012
16.09.2026 v.12.10
www.norlys.no

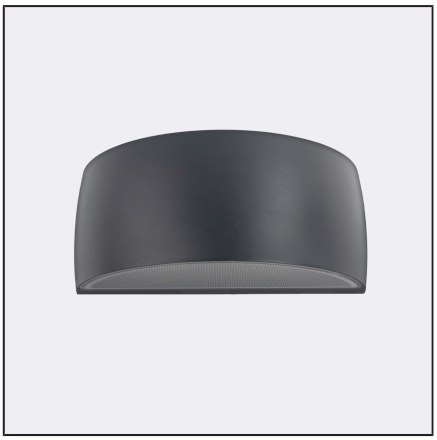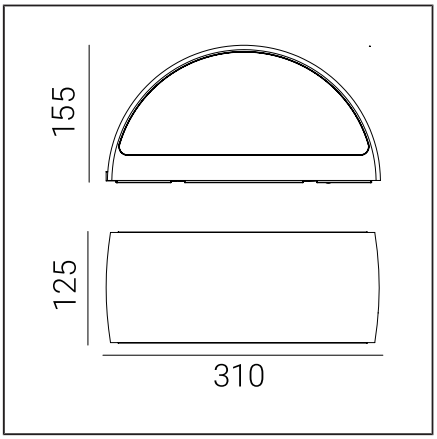

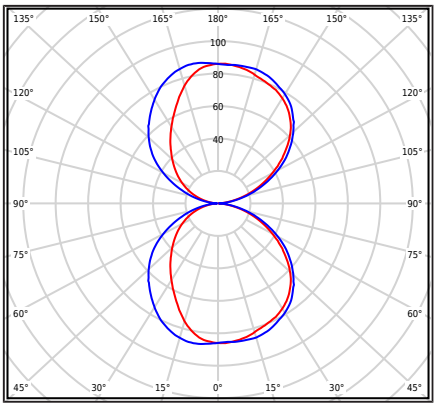


## Type of luminaire

| | |
|---|---|
| Type of luminaire | Wall light, |
| Photometric body | Double-sided light: directed up and down. |
| Characteristics of the luminaire | Luminaire with a wide range of applications for example for illumination of walls and facade surfaces or any other architectural concepts. |

## General information

| | |
|---|---|
| Materials | Powder painted aluminum cast. Lens - transparent polycarbonate with structure, UV stabilized. Silicone gasket. EPDM cable gland. |
| Mounting method | Fixing of the luminaire: aluminum plate with 2 holes 5x10mm spacing 45mm, or directly: 2 holes ø5mm spacing 68mm. |
| Terminal | Connection terminals: max 3x2,5mm², possibility to connect luminaire in loop max 3x1,5mm².<br>A round wire in the isolation with a diameter of ø7...10,5mm. |
| Type of light source | LED Lamp E27 A55...A60<br>Replaceable light source by an end-user. |
| Light control | Phase-dimming (TRIAC) TRAILING EDGE (TE) - LEADING EDGE (LE) |
| Luminaire weight net / gross | 2,45kg / 2,45kg |
| Box dimensions [cm] | 34,5cm x 15cm x 17cm |
| Luminaire dimensions [cm] | 31cm x 12,5cm x 15,5cm |

## Technical data

| | |
|---|---|
| LED Lamp E27 | Philips MAS LEDBulb DT5.9-60W E27 927 A60 FR G (Datasheet) |
| External control | Phase dimming LED GU10 E27 (User manual) |
| Light source wattage | 8W |
| Luminaire wattage | 5,9W |
| Lamp luminous flux | 806lm |
| Luminaire luminous flux | 384lm |
| Efficiency of the luminaire | 65,1lm/W |
| ULOR | 50% |
| Color temperature | 2700K |
| Colour rendering index CRI | 80 |
| L70TM-21 [wg LM-80] | >25 000h |
| Power Factor luminaire | PF 0,85 |
| Ta Rated temperature | +25°C |
| Ambient operating temp. range | -20...+45°C |
| This product contains light source of energy efficiency class D / EPREL | |
| BUG rating | B0-U3-G0 |

## Spare parts

| | |
|---|---|
| 08120006 | Gasket. |
| 46999021 | LED E27 lamp |

## Files to download

| | |
|---|---|
| Photometric LDT files | Photometric IES files |
| 3D models and drawings | Manual |
| BIM ArchiCAD | |

## Indexes

| Index | Color | RAL |
|---|---|---|
| 127AL | ALUMINUM | 9006 |
| 127BL | BLACK | 9005 |
| 127GR | GRAPHITE | 7016 |
| 127WH | WHITE | 9003 |

Other colors according to the "Colors Template" pattern book - available on request, subject to agreement with Norlys' Sales Department.

Norlys AS
P.B 1014 Hoff, 0218
Oslo
Hovfaret 4B, 0275
Oslo
Norway
+47 24 12 40 11
firmapost@norlys.no

TÜVRheinland CERTIFIED — Management System ISO 9001:2015 IATF 16949:2016 — www.tuv.com ID 9108651873

PCC Cert CERTIFICATE ISO 14001

RoHS 2011/65/UE

Please read the manual before installing. Due to the dynamic development of lighting technology, additional information is available upon request. LED module must be replaced by a qualified person in accordance with applicable regulations. Condensation, which can occur in luminaires, is a natural phenomenon and does not impair the quality of the luminaire.