

NORLYS KOSTER 1272


AC 220-240V 50-60Hz | IP 54 | IK 10 | LED | No Dim

Koster 1272XX0309
02.11.2026 v.09.5
www.norlys.no



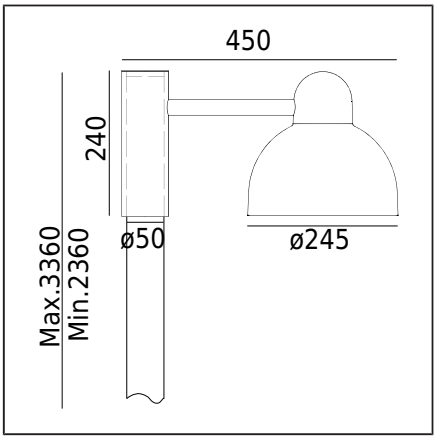

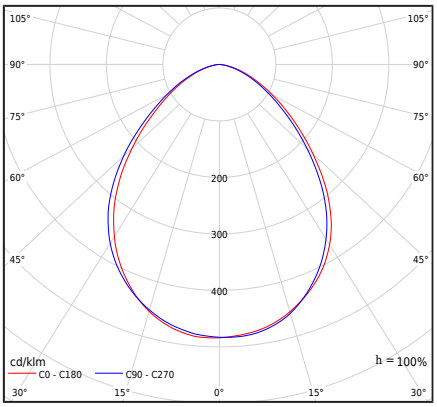

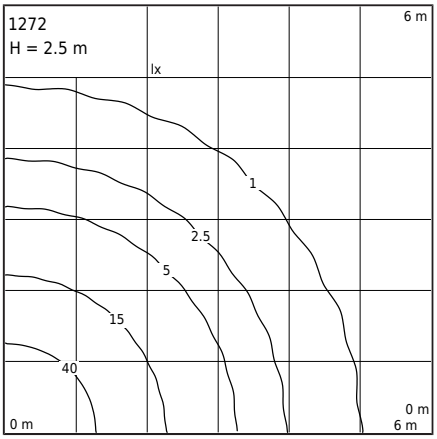

Type of luminaire

Type of luminaire	Pole luminaire.
Photometric body	Single-sided light: symmetrical, directed downward.
Characteristics of the luminaire	Fixture on an arm with a classic design. Mounted, intended for installation on a lighting pole with a mounting base Ø50mm.

General information

Materials	Powder painted aluminum cast. Lens - transparent polycarbonate with structure, UV stabilized.
Mounting method	Mounting the fixture: 3 holes ø10.5mm, on a diameter of ø207mm at 120° intervals. Set composition: art. 1271 - lighting fixture Ø50mm. art. 1270 - lighting pole. Other accessories must be ordered separately.
Terminal	Connection terminal: for a maximum cable of 3x2.5mm², equipped with a 1A 5x20 fuse. Cable in a round sheath with a maximum diameter of ø12.5mm.
Type of light source	LED module AC integrated Replaceable (LED only) light source by a professional.
Light control	Non-dimmable fixture
Luminaire weight net	3,07kg
Side area of luminaire	0,01m²

Technical data

LED module	PL-CUBE-AC-1100-830-230V-G3
Light source wattage	11,3W
Luminaire wattage	11,3W
Lamp luminous flux	1100lm
Luminaire luminous flux	858lm
Efficiency of the luminaire	75,9lm/W
ULOR	0%
Color temperature	3000K
Colour rendering index CRI	80
Power Factor luminaire	PF >0,9
Ta Rated temperature	+25°C
Ambient operating temp. range	-20...+45°C
BUG rating	B1-U1-G0

Spare parts

06710000	Lampshade - service kit
46999648	LED module.

Files to download

Photometric LDT files	Photometric IES files
Manual	

Indexes

Index	Color	RAL
1272AL	ALUMINUM	9006
1272GR	GRAPHITE	7016

Other colors according to the "Colors Template" / RAL pattern book - available on request, subject to agreement with Norlys' Sales Department.

Norlys AS
P.B 1014 Hoff, 0218
Oslo
Hovfaret 4B, 0275
Oslo
Norway
+47 24 12 40 11
firmapost@norlys.no

TÜVRheinland CERTIFIED — Management System ISO 9001:2015 IATF 16949:2016 — www.tuv.com ID 9108651873

PCC cert CERTIFICATE ISO 14001

RoHS 2011/65/UE

Before starting the installation, please read the instructions provided with the fixture. Due to the dynamic development of lighting technology, we provide additional information upon customer request. Condensation that may occur in the fixtures is a natural phenomenon and does not affect the quality of the fixture.