


NORLYS VASA 128


IP 65 | IK 08 | AC 220-240V 50-60Hz | LED | DIM

Vasa 128XX0014
16.09.2026 v.14.24
www.norlys.no

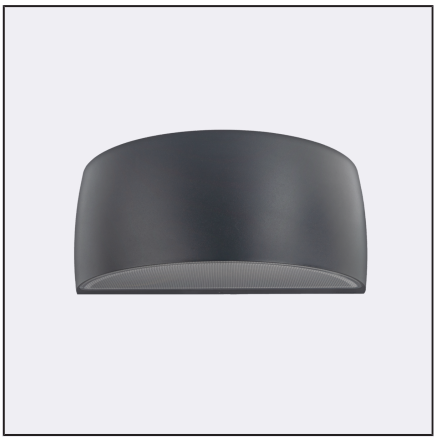

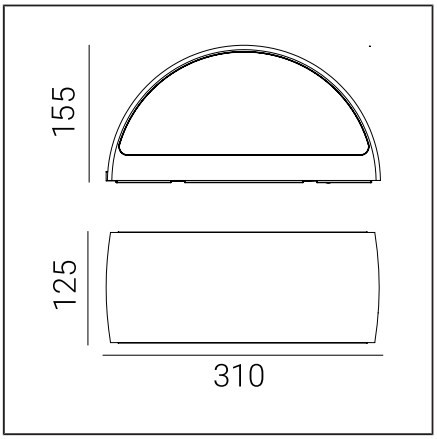

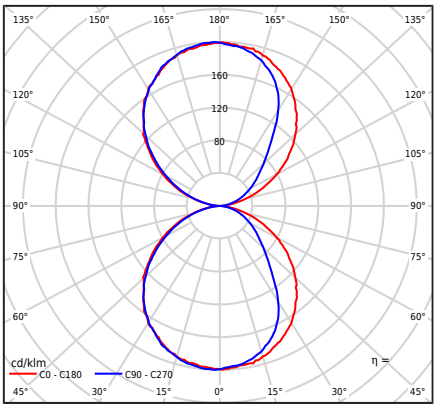

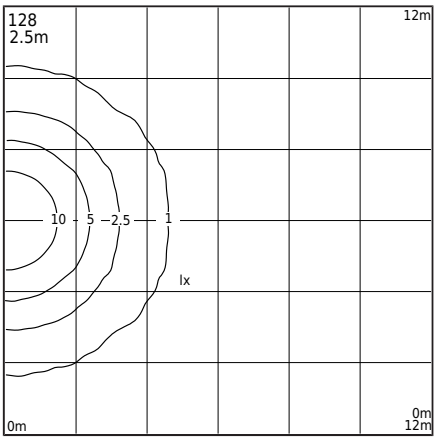

Type of luminaire

Type of luminaire	Wall light,
Photometric body	Double-sided light: directed up and down.
Characteristics of the luminaire	Luminaire with a wide range of applications for example for illumination of walls and facade surfaces or any other architectural concepts

General information

Materials	Powder painted aluminum cast. Lens - transparent polycarbonate with structure, UV stabilized. Silicone gasket. EPDM cable gland.
Mounting method	Mounting of the luminaire: aluminum plate with 2 holes 5x10mm spacing 45mm, or directly: 2 holes ø5mm spacing 68mm
Terminal	Connection terminals: max 3x2,5mm² Possibility to connect luminaire in loop max 3x1,5mm² Round insulated cable with a diameter of ø7...10,5mm According to the attached assembly instructions
Type of light source	LED module, electronic power supply Replaceable (LED only) light source by a professional. Replaceable control gear by a professional.
Light control	Trailing edge (TE) dimming
Luminaire weight net / gross	2,27kg / 2,67kg
Box dimensions [cm]	34,5cm x 15cm x 17cm
Luminaire dimensions [cm]	31cm x 12,5cm x 15,5cm

Technical data

2 LED modules	Philips Fortimo Strip 0,5ft MF FC LV6 3K (Datasheet)
Driver	Yes
Driver durability	50000h
External control	Philips Xitanium TE (User manual)
Light source wattage	6,6W
Luminaire wattage	8,5W
Lamp luminous flux	1128lm
Luminaire luminous flux	631lm
Efficiency of the luminaire	74,2lm/W
ULOR	50%
Color temperature	3000K
Colour consistency (McAdam ellipse)	SDCM3
Flicker of light (Pst LM)	≤0.3
Strobe effect (SVM)	≤0.7
Colour rendering index CRI	80
L80B20 [wg LM-80]	>72 000h
L90B10 [wg LM-80]	>64 000h
Power Factor luminaire	PF 0,90
THD factor	20%
Ta Rated temperature	+25°C
Ambient operating temp. range	-20...+45°C

This product contains light sources of energy efficiency class A–G D / EPREL

Optional luminaire also available:
- For emergency installations with DC voltage of approximately 180 ÷ 270 V
- Operating mode/dimming: phase dimming; DALI2 ; 1...10V
- For LED color 2700K [1/0]
- For a different luminous flux value
- For a different color of the luminaire (according to the RAL color palette)

Terms of sale and other information, after contact with the Norlys Sales Department

Inrush current	1,65A/16,5µs]
BUG rating	B0-U3-G0

Maximum number of luminaires of this type per MCB:

B 10A: 157, B 16A: 254, C 10A: 264, C 16A: 340

Norlys AS
P.B 1014 Hoff, 0218
Oslo
Hovfaret 4B, 0275
Oslo
Norway
+47 24 12 40 11
firmapost@norlys.no

TÜVRheinland CERTIFIED — Management System ISO 9001:2015 IATF 16949:2016 — www.tuv.com ID 9108651873

PCC cert CERTIFICATE ISO 14001

RoHS 2011/65/UE

Before the installation, please read the instructions included with the luminaire. Installation and service work are carried out by a person with appropriate authorizations and qualifications, in accordance with applicable regulations. Due to the dynamic development of lighting technology, we provide additional information upon customer request. Condensation that may occur in luminaires is a natural phenomenon and does not affect the quality of the luminaire

Spare parts

08120006	Gasket.
ZS128zx0014	Service set.
ZS4699100105	Service set LED
ZS46999610	Service set power supply

Files to download

Photometric LDT files	Photometric IES files
Manual	BIM ArchiCAD

Indexes

Index	Color	RAL
128AL	ALUMINUM	9006
128BL	BLACK	9005
128GR	GRAPHITE	7016
128WH	WHITE	9003

Other colors according to the "Colors Template" pattern book - available on request, subject to agreement with Norlys' Sales Department.

Norlys AS
P.B 1014 Hoff, 0218
Oslo
Hovfaret 4B, 0275
Oslo
Norway
+47 24 12 40 11
firmapost@norlys.no

Management System ISO 9001:2015 IATF 16949:2016
www.tuv.com ID 9108651873

CERTIFICATE ISO 14001

RoHS 2011/65/UE

Before the installation, please read the instructions included with the luminaire. Installation and service work are carried out by a person with appropriate authorizations and qualifications, in accordance with applicable regulations. Due to the dynamic development of lighting technology, we provide additional information upon customer request. Condensation that may occur in luminaires is a natural phenomenon and does not affect the quality of the luminaire