


NORLYS EGERSUND 1280

Egersund
1280XX0014
25.09.2026 v.14.22
www.norlys.no



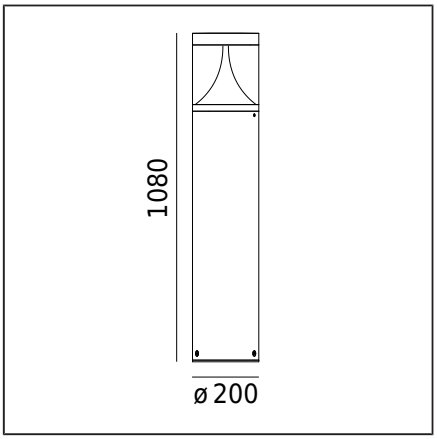

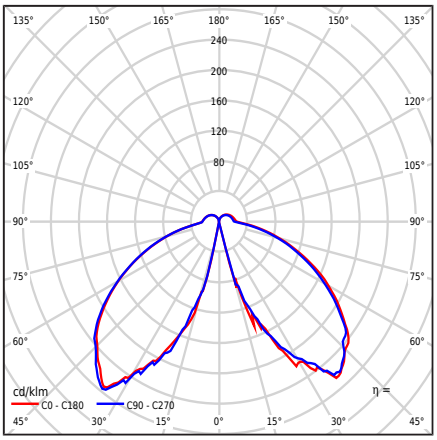

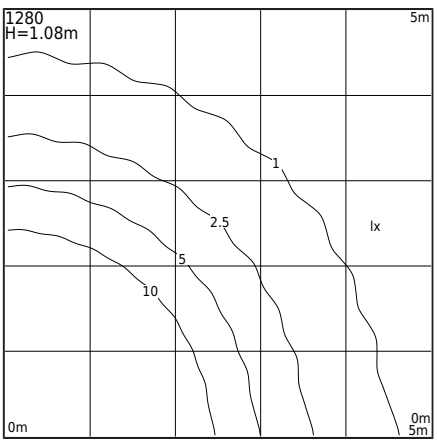

Type of luminaire

Type of luminaire	Post light fixture.
Photometric body	Light with rotationally symmetrical light distribution.
Characteristics of the luminaire	Luminaire with a contemporary design. For lighting gardens and other private and public areas

General information

Materials	Powder painted aluminum cast. Lens - transparent plastic PMMA. Silicone gasket. Nylon6 cable gland.
Mounting method	Luminaire mounting: 3 holes ø9mm on a diameter of ø65mm every 120° According to the attached assembly instructions Other accessories must be purchased separately
Terminal	Connection terminals: max 5x4mm² Possibility of connecting the luminaire in loops of max. 5x4mm² Round insulated cable with a diameter of ø8...17mm
Type of light source	LED module, electronic power supply Replaceable (LED only) light source by a professional. Replaceable control gear by a professional.
Light control	Phase-dimming (TRIAC) TRAILING EDGE (TE) - LEADING EDGE (LE)
Luminaire weight net / gross	11,47kg / 13,17kg
Box dimensions [cm]	23cm x 22cm x 113cm
Luminaire dimensions [cm]	20cm x 20cm x 108cm

Technical data

LED module	Cree DK201002 V1 JK3030 6V 3K (Datasheet)
Driver	Yes
Light source wattage	18W
Luminaire wattage	20,3W
Lamp luminous flux	2617lm
Luminaire luminous flux	1681lm
Efficiency of the luminaire	82,8lm/W
ULOR	9%
Color temperature	3000K
Colour consistency (McAdam ellipse)	SDCM3
Colour rendering index CRI	80
L80TM-21 [wg LM-80]	>102 000h
L90 TM-21 [wg LM-80]	>52 600h
Power Factor luminaire	PF 0,85
Ta Rated temperature	+25°C
Ambient operating temp. range	-20...+45°C

This product contains light source of energy efficiency class C / EPREL

Optionally, the luminaire is also available:
- Operating mode/dimming: phase dimming; DALI/TD ; 1...10V; DALI outdoor full program
- Other available operating modes / dimming as part of the DALI outdoor AstroDim / Dynadimmer "middle of the night" system upon special request
- In the safety class for KL I
- For LED color 2700K [1/1]
- For a different luminous flux value
- Version with surge protection device (SPD)
- For a different color of the luminaire (according to the RAL color palette)
- For a different luminaire height

Terms of sale and other information, after contact with the Norlys Sales Department

BUG rating	B1-U3-G1

Accessories sold separately

1231GA0009	Ground anchor
3087GA0009	Mounting adapter
1230ZX0009	Concreting anchor

Spare parts

ZS1280zx0014	Service set.

Norlys AS
P.B 1014 Hoff, 0218
Oslo
Hovfaret 4B, 0275
Oslo
Norway
+47 24 12 40 11
firmapost@norlys.no

Management System ISO 9001:2015 IATF 16949:2016 TÜVRheinland CERTIFIED www.tuv.com ID 9108651873

PCC Cert CERTIFICATE ISO 14001

RoHS 2011/65/UE

Before the assembly, read the instructions attached to the luminaire. Installation and service work is carried out by a person with appropriate authorizations and qualifications, in accordance with applicable regulations. Due to the dynamic development of lighting technology, we provide additional information on request.
Condensation that may occur in the luminaires is a natural phenomenon and does not affect the quality of the luminaire

NORLYS EGERSUND 1280



Egersund
1280XX0014
25.09.2026 v.14.22
www.norlys.no

Files to download

Photometric LDT files	Photometric IES files
Manual	BIM Revit
BIM ArchiCAD	

Indexes

Index	Color	RAL
1280AL	ALUMINUM	9006
1280GR	GRAPHITE	7016

Other colors according to the "Colors Template" / RAL pattern book - available on request, subject to agreement with Norlys' Sales Department.

Norlys AS
P.B 1014 Hoff, 0218
Oslo
Hovfaret 4B, 0275
Oslo
Norway
+47 24 12 40 11
firmapost@norlys.no

TÜVRheinland CERTIFIED
Management System ISO 9001:2015 IATF 16949:2016
www.tuv.com ID 9108651873

PCC Cert CERTIFICATE ISO 14001

RoHS 2011/65/UE

Before the assembly, read the instructions attached to the luminaire. Installation and service work is carried out by a person with appropriate authorizations and qualifications, in accordance with applicable regulations. Due to the dynamic development of lighting technology, we provide additional information on request.
Condensation that may occur in the luminaires is a natural phenomenon and does not affect the quality of the luminaire