

NORLYS EGERSUND MINI 1290


AC 220-240V 50-60Hz | IP 65 | IK 08 | LED | DIM

Egersund mini
1290XX0014
14.10.2026 v.14.45
www.norlys.no



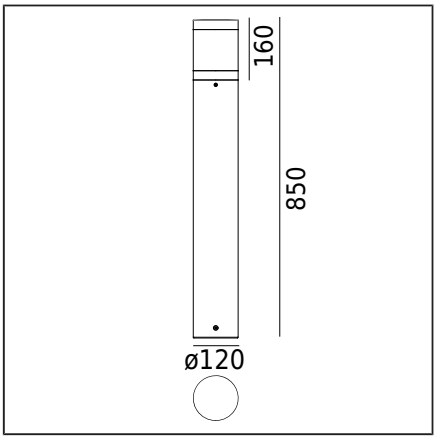

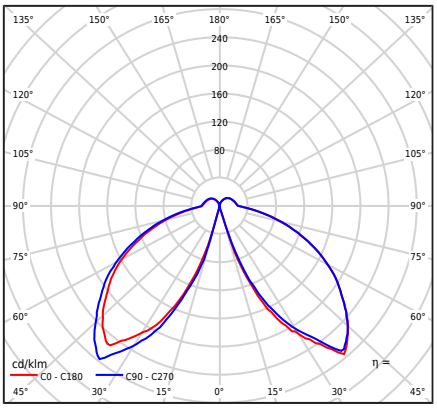

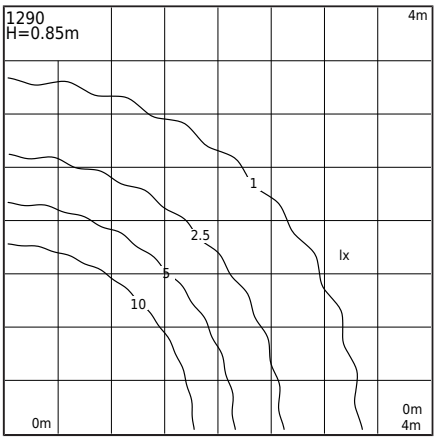

Type of luminaire

Type of luminaire	Post light fixture.
Photometric body	Light with rotationally symmetrical light distribution.
Characteristics of the luminaire	Luminaire with contemporary design, for lighting gardens and other private and public areas

General information

Materials	Powder painted aluminum cast. Lens - transparent plastic PMMA. Silicone gasket. Nylon6 cable gland.
Mounting method	Mounting of the luminaire: 3 holes ø9mm in diameter ø65mm every 120° According to the attached assembly instructions Other accessories must be purchased separately
Terminal	Connection terminals: max 2x4mm² Possibility to connect the luminaire in loops max 2x2,5mm² Round insulated cable with a diameter of ø8...12,5mm
Type of light source	LED module, electronic power supply Replaceable (LED only) light source by a professional. Replaceable control gear by a professional.
Light control	Phase-dimming (TRIAC) TRAILING EDGE (TE) - LEADING EDGE (LE)
Luminaire weight net / gross	5,5kg / 6,51kg
Box dimensions [cm]	16cm x 16cm x 93cm

Technical data

LED module	Cree DK210704 V2 JB2835 3V 3K (Datasheet)
Driver	Yes
Light source wattage	7,4W
Luminaire wattage	9,1W
Lamp luminous flux	1370lm
Luminaire luminous flux	864lm
Efficiency of the luminaire	94,9lm/W
ULOR	11%
Color temperature	3000K
Colour consistency (McAdam ellipse)	SDCM1
Colour rendering index CRI	80
L80TM-21 [wg LM-80]	>102 000h
L90 TM-21 [wg LM-80]	>52 600h
Power Factor luminaire	PF 0,9
THD factor	10%
Ta Rated temperature	+25°C
Ambient operating temp. range	-20...+45°C

This product contains light source of energy efficiency class C / EPREL

Optionally, the luminaire is also available:
- In the safety class for KL I
- For the LED color 2700K [1/1]
- For a different value of the luminous flux
- Version with surge protection device (SPD)
- For a different color of the fitting (according to the RAL color palette)
- For a different height of the luminaire

Terms of sale and other information, after contact with the Sales Department of Norlys

Inrush current	2A / 50µs
BUG rating	B1-U3-G1

Accessories sold separately

3086GA0009	Mounting adapter
205ZX0010	Concreting anchor
206GA0010	Ground anchor
206GA0S10	Adapter for concrete foundation

Spare parts

ZS1290zx0014	Electrical repair kit.

Norlys AS
P.B 1014 Hoff, 0218
Oslo
Hovfaret 4B, 0275
Oslo
Norway
+47 24 12 40 11
firmapost@norlys.no

TÜVRheinland CERTIFIED — Management System ISO 9001:2015 IATF 16949:2016 — www.tuv.com ID 9108651873

PCC Cert CERTIFICATE ISO 14001

RoHS 2011/65/UE

Before the installation, read the instructions attached to the luminaire. Due to the dynamic development of lighting technology, we provide additional information at the client's request. Condensation, which may occur in luminaires, is a natural phenomenon and does not deteriorate the quality of the luminaire

EGERSUND MINI 1290



Files to download

Photometric LDT files	Photometric IES files
Manual	BIM Revit
BIM ArchiCAD	

Indexes

Index	Color	RAL
1290AL	ALUMINUM	9006
1290GR	GRAPHITE	7016

Other colors according to the "Colors Template" / RAL pattern book - available on request, subject to agreement with Norlys' Sales Department.

Norlys AS
P.B 1014 Hoff, 0218
Oslo
Hovfaret 4B, 0275
Oslo
Norway
+47 24 12 40 11
firmapost@norlys.no

TÜVRheinland CERTIFIED
Management System ISO 9001:2015 IATF 16949:2016
www.tuv.com ID 9108651873
PCC Cert CERTIFICATE ISO 14001
RoHS 2011/65/UE

Before the installation, read the instructions attached to the luminaire. Due to the dynamic development of lighting technology, we provide additional information at the client's request. Condensation, which may occur in luminaires, is a natural phenomenon and does not deteriorate the quality of the luminaire