
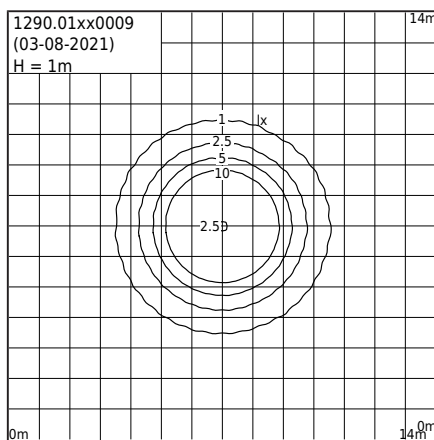
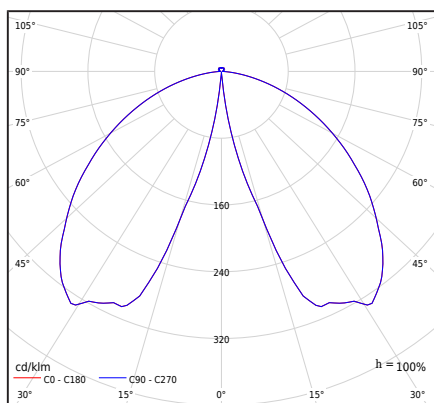
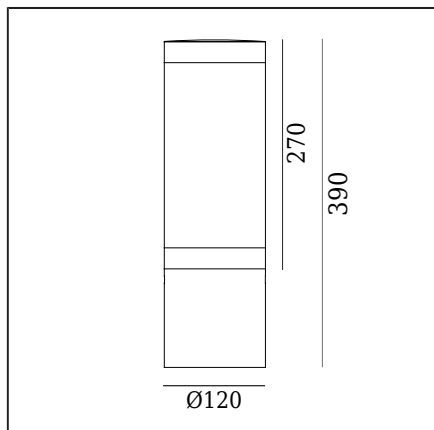


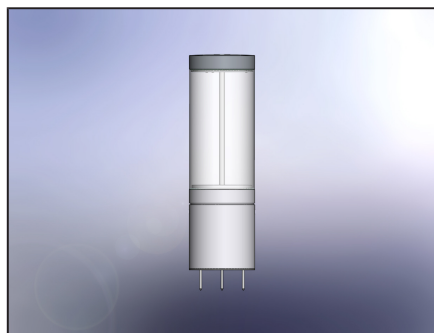

Type of luminaire

Type of luminaire	Post light fixture.
Photometric body	Light with rotationally symmetrical light distribution.
Characteristics of the luminaire	Modern design luminaire. For lighting gardens and other private areas and public spaces.

General information

Materials	Powder painted aluminum cast. Lens - satin PMMA plastic. Silicone gasket.
Mounting method	Luminaire mounting: luminaire for mounting on a pole with a diameter of Ø113mm.
Terminal	Connection terminals: max 3x2,5mm ² , possibility to connect luminaire in loop max 3x1,5mm ² .
Type of light source	LED module AC integrated Replaceable (LED only) light source by a professional.
Light control	Phase-dimming (TRIAC) TRAILING EDGE (TE) - LEADING EDGE (LE)
Box dimensions [cm]	40,5cm x 13cm x 13cm

Technical data

Luminaire wattage	10W
Luminaire luminous flux	803lm
Efficiency of the luminaire	80,3lm/W
Color temperature	4000K
Colour consistency (McAdam ellipse)	SDCM3
Colour rendering index CRI	80
Rated life time L70/B50 at 25°C	> 50 000h
LED photobiological threat	RG0 or RG1
Power Factor luminaire	PF>0,97
THD factor	< 20%
Ta Rated temperature	+25°C
Ambient temperature	Ta max=+65°C
Inrush current	150mA / 500µs

Accessories sold separately

206GA0010	Ground anchor
205ZX0010	Concreting anchor
3086GA0009	Mounting adapter

Spare parts

0912900301	Electric set.
------------	---------------

Files to download

Photometric LDT files	Photometric IES files
BIM Revit	BIM ArchiCAD

Indexes

Index	Color	RAL
12900AL	ALUMINUM	9006
12900GR	GRAPHITE	7016