


NORLYS ASKER BIG 1300


AC 220-240V 50-60Hz | IP 65 | IK 08 | LED | DIM

Asker big
1300XX0014
16.09.2026 v.14.15
www.norlys.no

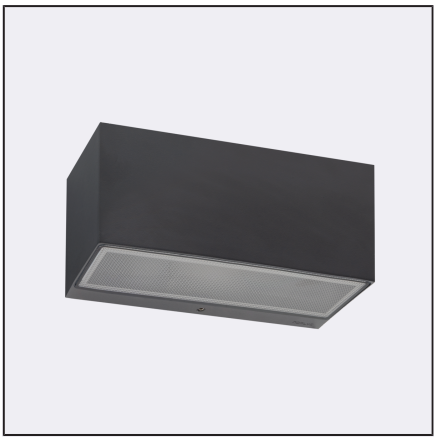

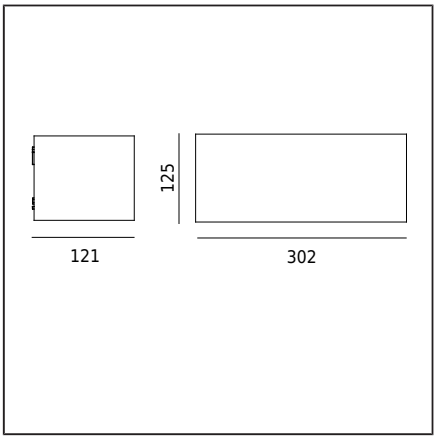

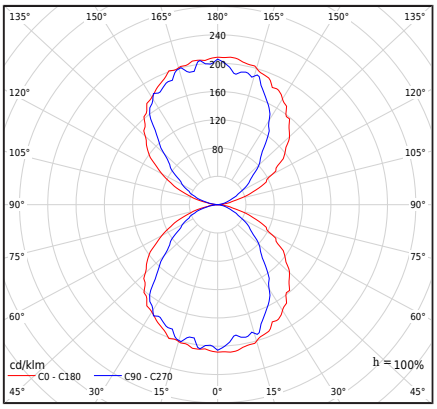

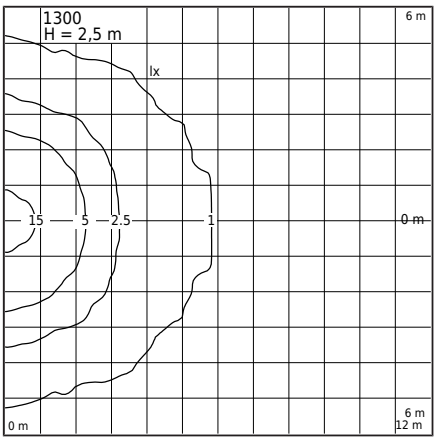

Type of luminaire

Type of luminaire	Wall light,
Photometric body	Double-sided light: directed up and down.
Characteristics of the luminaire	Luminaire with a wide range of applications, including for lighting: wall surfaces and other architectural concepts.

General information

Materials	Powder painted aluminum cast. Lens - transparent polycarbonate with structure, UV stabilized. Silicone gasket. EPDM cable gland.
Mounting method	Fixture mounting: intermediate plate with 2 adjustable holes 5x10mm, spacing 45mm, directly 2 holes ø5mm, spacing 68mm.
Terminal	Connection terminals: max 3x2.5mm², possibility of connecting the fixture in a loop max 3x1.5mm². Wire in a round jacket with a diameter of ø7...10.5mm.
Type of light source	LED module, electronic power supply Replaceable (LED only) light source by a professional. Replaceable control gear by a professional.
Light control	Trailing edge (TE) dimming
Luminaire weight net / gross	2,62kg / 2,98kg
Box dimensions [cm]	34,5cm x 15cm x 17cm
Luminaire dimensions [cm]	30,2cm x 12,5cm x 12,1cm

Technical data

2 LED modules	Philips Fortimo_LED_Strip_0.5ft_MF_8xx_HV6 3K (Datasheet)
Driver	Yes
Driver durability	50000h
External control	Philips Xitanium TE (User manual)
Light source wattage	6,6W
Luminaire wattage	8,3W
Lamp luminous flux	1128lm
Luminaire luminous flux	547lm
Efficiency of the luminaire	65,9lm/W
Color temperature	3000K
Colour consistency (McAdam ellipse)	SDCM3
Flicker of light (Pst LM)	≤0.3
Strobe effect (SVM)	≤0.7
Colour rendering index CRI	80
L80B20 [wg LM-80]	>72 000h
L90B10 [wg LM-80]	>64 000h
Power Factor luminaire	PF > 0,9
THD factor	20%
Ta Rated temperature	+25°C
Ambient operating temp. range	-20...+45°C

This product contains light sources of energy efficiency class C / EPREL

Optionally, the fixture is also available:
- for emergency installations with a DC voltage of approximately 180 ÷ 270V
- in a version with a motion sensor type
- for LED color 2700K [1/0]
- for different luminous flux value
- for another fixture color (according to the RAL color palette)

Terms of sale and other information are subject to agreement with the Norlys Sales Department.

Inrush current	1,65A/16,5µs]
BUG rating	B0-U3-G0

Maximum number of luminaires of this type per MCB:

B 10A: 157

Spare parts

ZS1300zx0014	Service set.
ZS4699100105	Service set LED
ZS46999610	Service set power supply

Norlys AS
P.B 1014 Hoff, 0218
Oslo
Hovfaret 4B, 0275
Oslo
Norway
+47 24 12 40 11
firmapost@norlys.no

TÜVRheinland CERTIFIED — Management System ISO 9001:2015 IATF 16949:2016 — www.tuv.com ID 9108651873

PCC Cert CERTIFICATE ISO 14001

RoHS 2011/65/UE

Before starting assembly, please read the instructions attached to the fixture. Assembly and servicing work is carried out by a person with appropriate authorizations and qualifications, in accordance with applicable regulations. Due to the dynamic development of lighting technology, additional information is provided at the customer's request. Condensation that may occur in fixtures is a natural phenomenon and does not affect the deterioration of the fixture's quality.

ASKER BIG 1300

Files to download

Photometric LDT files	Photometric IES files
Manual	BIM Revit
BIM ArchiCAD	

Indexes

Index	Color	RAL
1300AL	ALUMINUM	9006
1300BL	BLACK	9005
1300CG	CEMENT GREY	7033
1300CB	COPPER BROWN	8004
1300CS	CORTEN STEEL	approx. 8011
1300GR	GRAPHITE	7016
1300GB	GREY BEIGE	7006
1300WH	WHITE	9003

Other colors according to the "Colors Template" pattern book - available on request, subject to agreement with Norlys' Sales Department.

Norlys AS
P.B 1014 Hoff, 0218
Oslo
Hovfaret 4B, 0275
Oslo
Norway
+47 24 12 40 11
firmapost@norlys.no

Management System ISO 9001:2015 IATF 16949:2016
www.tuv.com ID 9108651873
CERTIFICATE ISO 14001
RoHS 2011/65/UE

Before starting assembly, please read the instructions attached to the fixture. Assembly and servicing work is carried out by a person with appropriate authorizations and qualifications, in accordance with applicable regulations. Due to the dynamic development of lighting technology, additional information is provided at the customer's request. Condensation that may occur in fixtures is a natural phenomenon and does not affect the deterioration of the fixture's quality.