
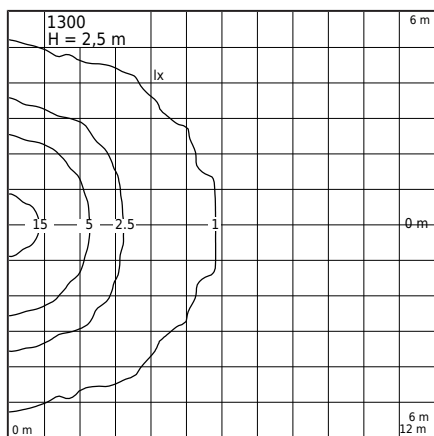
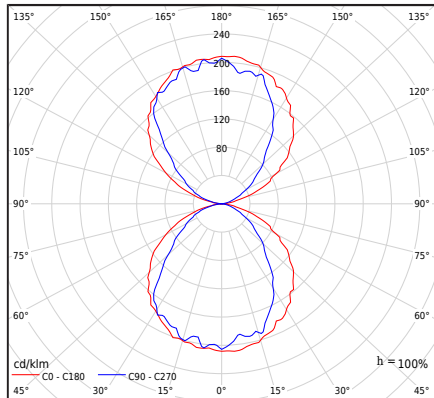
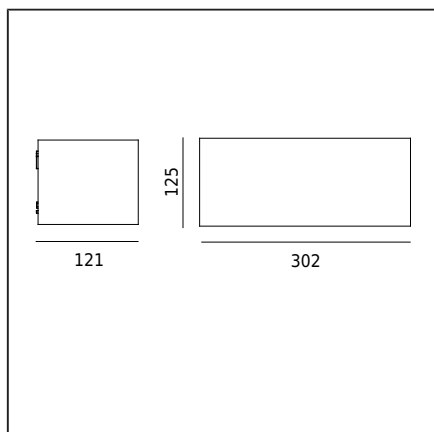


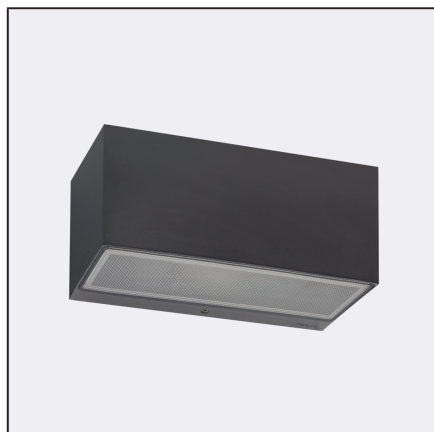

Type of luminaire

Type of luminaire	Wall light,
Photometric body	Double-sided light facing up and down.
Characteristics of the luminaire	Luminaire with a wide range of applications, for illumination of walls and facade surfaces or any other architectural concepts

General information

Materials	Powder painted aluminum cast. Lens - transparent polycarbonate with structure, UV stabilized. Silicone gasket. EPDM cable gland.
Mounting method	Mounting of the luminaire: mounting plate with 2 adjust holes 5x10mm, spacing 45mm, directly 2 holes ø5mm, spacing 68mm
Terminal	Connection terminals: max 3x2,5mm² Possibility to connect luminaire in loop max 3x1,5mm² Round insulated cable with a diameter of ø7...10,5mm
Type of light source	LED module, electronic power supply Replaceable (LED only) light source by a professional. Replaceable control gear by a professional.
Light control	Trailing edge (TE) dimming
Net / gross weight of luminaire	2,62kg / 2,98kg
Box dimensions [cm]	34,5cm x 15cm x 17cm
Luminaire dimensions [cm]	30,2cm x 12,5cm x 12,1cm

Technical data

External control	Philips Xitanium TE (User manual)
Luminaire wattage	8,3W
Luminaire luminous flux	547lm
Efficiency of the luminaire	65,9lm/W
Color temperature	3000K
Colour consistency (McAdam ellipse)	SDCM3
Flicker of light (Pst LM)	≤0.3
Strobe effect (SVM)	≤0.7
Colour rendering index CRI	80
Rated life time L70/B50 at 25°C	>72 000h
Rated life time L80/B20 at 25°C	>72 000h
Power Factor luminaire	PF > 0,9
THD factor	< 20%
Ta Rated temperature	+25°C, up to +50°C on request
Ambient temperature	TA MAX=+65°C

This product contains light sources of energy efficiency class **A** / **EPREL**

Optional luminaire also available:

- For emergency installations with DC voltage of approximately 180 ÷ 270V
 - Version with motion sensor type
 - For LED color 2700K [I/O]
 - For a different luminous flux value
 - For a different color of the luminaire (according to the RAL color palette)
- Terms of sale and other information, after contact with the Norlys Sales Department

Inrush current	1,65A/16,5μs
BUG rating	B0-U3-G0

Spare parts

ZS1300zx0014	Service set.
ZS4699100105	Service set LED
ZS46999610	Service set power supply

Files to download

Photometric LDT files	Photometric IES files
Manual	BIM Revit
BIM ArchiCAD	



Indexes

Index	Color	RAL
1300AL	ALUMINUM	9006
1300BL	BLACK	9005
1300CG	CEMENT GREY	7033
1300CB	COPPER BROWN	8004
1300CS	CORTEN STEEL	approx. 8011
1300GR	GRAPHITE	7016
1300GB	GRAY BEIGE	7006
1300WH	WHITE	9003