


NORLYS ASKER BIG 1302


AC 220-240V 50-60Hz | IP 65 | IK 08 | LED | DIM

Asker big
1302XX0013
16.09.2026 v.13.9
www.norlys.no

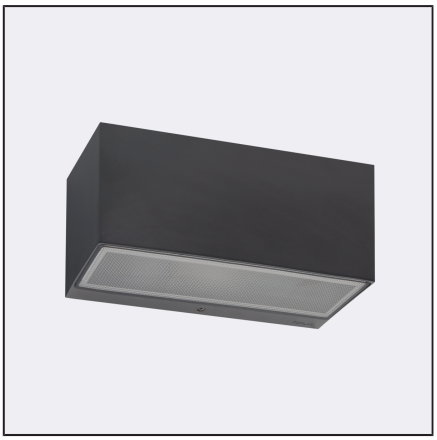

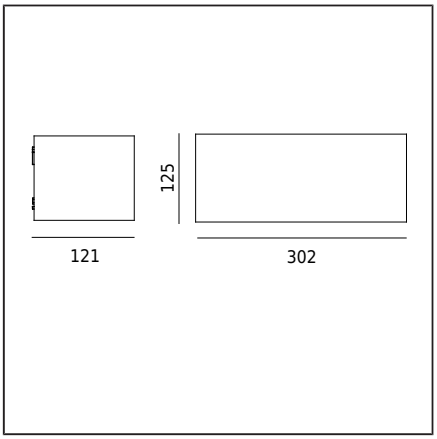

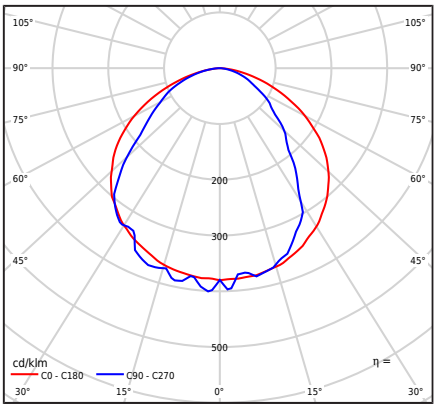

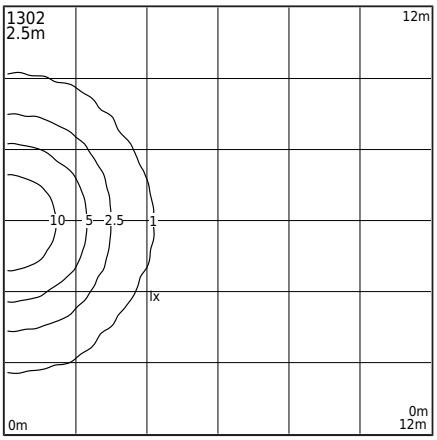

Type of luminaire

Type of luminaire	Wall light,
Photometric body	Diffuse downward-directed hemispherical light
Characteristics of the luminaire	A fixture with a wide range of applications, for lighting surfaces of walls and facades as well as other architectural concepts.

General information

Materials	Powder painted aluminum cast. Lens - transparent polycarbonate with structure, UV stabilized. Silicone gasket. EPDM cable gland.
Mounting method	Fixture mounting: intermediate plate with 2 adjustment holes 5x10mm, spacing 45mm, directly 2 holes ø5mm, spacing 68mm.
Terminal	Connection terminals: max 3x2.5mm², possibility of connecting the fixture in a loop max 3x1.5mm². Cable with a round sheath of diameter ø7...10.5mm.
Type of light source	LED module, electronic power supply Replaceable (LED only) light source by a professional. Replaceable control gear by a professional.
Light control	Trailing edge (TE) dimming
Box dimensions [cm]	34,5cm x 15cm x 17cm

Technical data

LED module	Philips Strip OC 0.5ft 550lm 8xx FC HV5 3K (Datasheet)
Driver	Yes
Driver durability	50000h
Light source wattage	3,9W
Luminaire wattage	5,2W
Lamp luminous flux	653lm
Luminaire luminous flux	306lm
Efficiency of the luminaire	58,8lm/W
ULOR	0%
Color temperature	3000K
Colour consistency (McAdam ellipse)	SDCM3
Colour rendering index CRI	80
L80B20 [wg LM-80]	>72 000h
L90B10 [wg LM-80]	>64 000h
LED photobiological threat	RG0 or RG1
Power Factor luminaire	PF > 0,9
Ta Rated temperature	+25°C
Ambient operating temp. range	-20...+45°C
This product contains light source of energy efficiency class C / EPREL	
BUG rating	B0-U0-G0

Spare parts

ZS1302zx0013	Service set.

Files to download

Photometric LDT files	Photometric IES files
Manual	BIM Revit
BIM ArchiCAD	

Indexes

Index	Color	RAL
1302AL	ALUMINUM	9006
1302BL	BLACK	9005
1302GR	GRAPHITE	7016
1302WH	WHITE	9003

Other colors according to the "Colors Template" pattern book - available on request, subject to agreement with Norlys' Sales Department.

Norlys AS
P.B 1014 Hoff, 0218
Oslo
Hovfaret 4B, 0275
Oslo
Norway
+47 24 12 40 11
firmapost@norlys.no

TÜVRheinland CERTIFIED — Management System ISO 9001:2015 IATF 16949:2016 — www.tuv.com ID 9108651873

PCC Cert CERTIFICATE ISO 14001

RoHS 2011/65/UE

Before starting the assembly, one should familiarize themselves with the instructions included with the fixture. Due to the dynamic development of lighting technology, additional information is provided at the customer's request. Condensation that may occur in fixtures is a natural phenomenon and does not affect the deterioration of the fixture quality.