
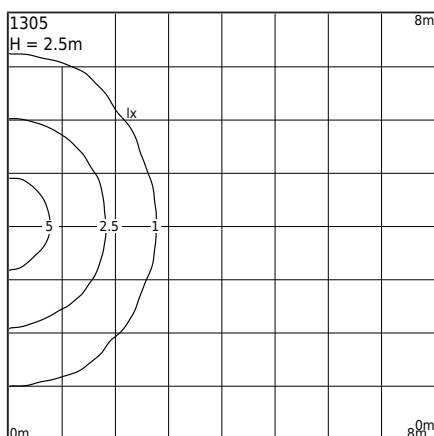
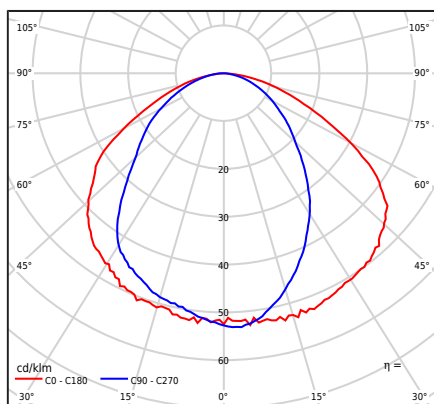
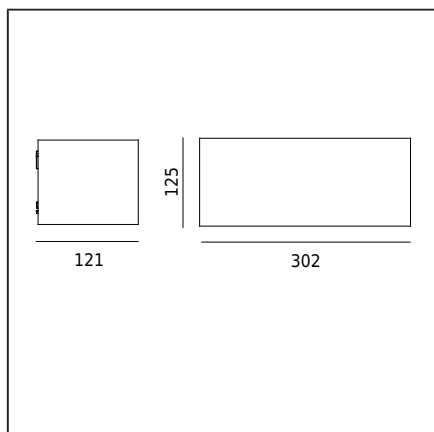


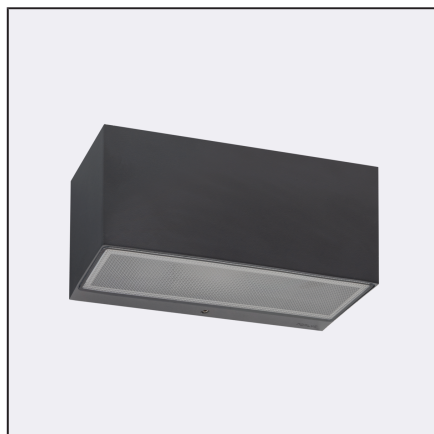

Type of luminaire

Type of luminaire	Wall light,
Photometric body	Diffuse downward-directed hemispherical light
Characteristics of the luminaire	Luminaire with a wide range of applications for example for illumination of walls and facade surfaces or any other architectural concepts.

General information

Materials	Powder painted aluminum cast. Lens - transparent polycarbonate with structure, UV stabilized. Silicone gasket. EPDM cable gland.
Mounting method	Fixing of the luminaire: mounting plate with 2 adjust holes 5x10mm, spacing 45mm, directly 2 holes ø5mm, spacing 68 mm.
Terminal	Connection terminals: max 3x2,5mm ² , possibility to connect luminaire in loop max 3x1,5mm ² . A round wire in the isolation with a diameter of ø7...10,5mm.
Type of light source	E27 Lamp Replaceable light source by an end-user.
Net / gross weight of luminaire	2,85kg / 2,85kg
Box dimensions [cm]	34,5cm x 15cm x 17cm

Technical data

Ta Rated temperature	+25°C, up to +50°C on request
Ambient temperature	Ta max=+65°C
Possibility to order the luminaire with LED E27 Philips Master LEDbulb 806lm / 8,5W / 2700K (dimmbale).	
BUG rating	B0-U0-G0

Recommended light sources

Osram ECO PRO Classic 46 <=> 60W E27	Philips ECO Classic 42 <=> 60W E27
Osram LED Parathom Classic / Retrofit E27	Philips Master LEDbulb / Classic / CorePro E27

Files to download

Photometric LDT files	Photometric IES files
Manual	BIM Revit
BIM ArchiCAD	

Indexes

Index	Color	RAL
1305AL	ALUMINUM	9006
1305BL	BLACK	9005
1305GR	GRAPHITE	7016
1305WH	WHITE	9003