


NORLYS ASKER BIG PRO 1306


AC 220-240V 50-60Hz | IP 65 | IK 08 | LED | DIM

Asker big pro
1306XX0011
16.09.2026 v.11.18
www.norlys.no

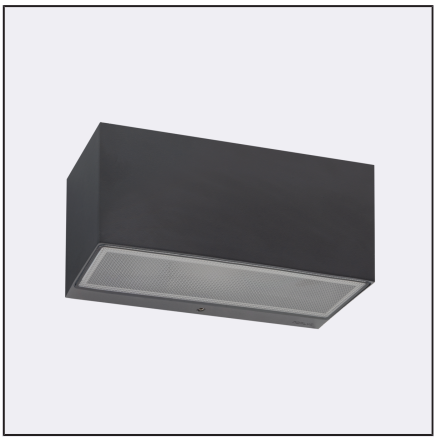

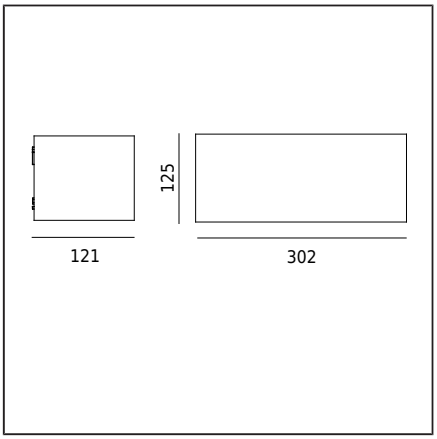

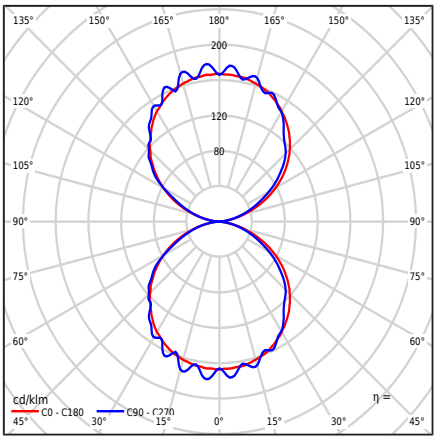

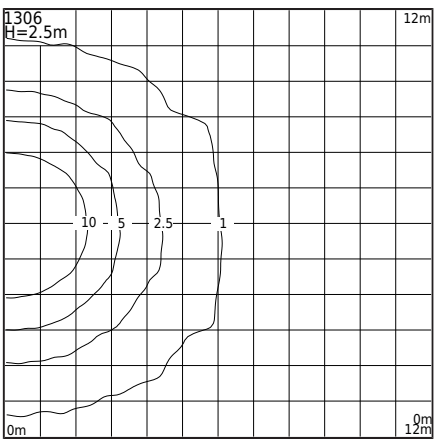

Type of luminaire

Type of luminaire	Wall light,
Photometric body	Double-sided light: directed up and down.
Characteristics of the luminaire	Lighting fixture with a wide range of applications, suitable for illuminating wall surfaces, facades, and other architectural concepts. Suitable for emergency installations on direct current: DC 180...280V.

General information

Materials	Powder painted aluminum cast. Lens - transparent polycarbonate with structure, UV stabilized. Silicone gasket. EPDM cable gland.
Mounting method	Fixture mounting: intermediate plate with 2 adjustment holes 5x10mm, spacing 45mm, directly with 2 ø5mm holes, spacing 68mm. According to the enclosed installation instructions.
Terminal	Connection terminals: max 3x2.5mm², loop connection option for the fixture max 3x1.5mm². Cable in a round sheath with a diameter of ø7...10.5mm.
Type of light source	LED module, electronic power supply Replaceable (LED only) light source by a professional. Replaceable control gear by a professional.
Light control	Trailing edge (TE) dimming
Box dimensions [cm]	34,5cm x 15cm x 17cm
Luminaire dimensions [cm]	30,2cm x 12cm x 12,5cm

Technical data

LED module	Cree DK200305 V3 JB2835 3V 3K R03 (Datasheet)
Driver	Yes
Driver durability	50000h
External control	Dim. TRIAC (KGP) (User manual)
Light source wattage	10,6 W
Luminaire wattage	13,3 W
Lamp luminous flux	1994lm
Luminaire luminous flux	1186lm
Efficiency of the luminaire	89,2lm/W
Color temperature	3000K
Flicker of light (Pst LM)	≤1
Strobe effect (SVM)	≤0.4
Colour rendering index CRI	80
L80TM-21 [wg LM-80]	>102 000h
L90 TM-21 [wg LM-80]	>52 600h
Power Factor luminaire	PF ≥0.92
THD factor	≤15%
Ta Rated temperature	+25°C
Ambient operating temp. range	-20...+45°C

This product contains light source of energy efficiency class C / EPREL

Optionally available fixture also:
- Operating mode/dimming: DALI2
- For LED color 2700K [1/1]
- For a different luminous flux value
- For a different fixture color (according to RAL color palette)

Sales conditions and other information upon agreement with Norlys Sales Department.

Inrush current	10A/13,5µs
BUG rating	B0-U4-G0

Maximum number of luminaires of this type per MCB:

B 10A: 60, B 16A: 96, C 10A: 37, C 16A: 96

Spare parts

ZS1306zx0011	Service set.
ZS4699101109	Service set LED
ZS4699900615	Service set power supply

Norlys AS
P.B 1014 Hoff, 0218
Oslo
Hovfaret 4B, 0275
Oslo
Norway
+47 24 12 40 11
firmapost@norlys.no

TÜVRheinland CERTIFIED — Management System ISO 9001:2015 IATF 16949:2016 — www.tuv.com ID 9108651873

PCC cert CERTIFICATE ISO 14001

RoHS 2011/65/UE

Before starting the assembly, please refer to the instructions included with the luminaire. The assembly and servicing work should be carried out by a person with appropriate authorizations and qualifications, in accordance with the applicable regulations. Due to the dynamic development of lighting technology, additional information is provided at the customer's request. Condensation that may occur in luminaires is a natural phenomenon and does not affect the deterioration of the quality of the luminaire.

ASKER BIG PRO 1306

Files to download

Photometric LDT files	Photometric IES files
Manual	BIM Revit
BIM ArchiCAD	

Indexes

Index	Color	RAL
1306AL	ALUMINUM	9006
1306BL	BLACK	9005
1306GR	GRAPHITE	7016
1306WH	WHITE	9003

Other colors according to the "Colors Template" pattern book - available on request, subject to agreement with Norlys' Sales Department.

Norlys AS
P.B 1014 Hoff, 0218
Oslo
Hovfaret 4B, 0275
Oslo
Norway
+47 24 12 40 11
firmapost@norlys.no

Before starting the assembly, please refer to the instructions included with the luminaire. The assembly and servicing work should be carried out by a person with appropriate authorizations and qualifications, in accordance with the applicable regulations. Due to the dynamic development of lighting technology, additional information is provided at the customer's request. Condensation that may occur in luminaires is a natural phenomenon and does not affect the deterioration of the quality of the luminaire.