


NORLYS ASKER BIG PRO 1307


IP 65 | IK 08 | AC 220-240V 50-60Hz | LED | DIM

Asker big pro
1307XX0009
01.10.2026 v.09.31
www.norlys.no

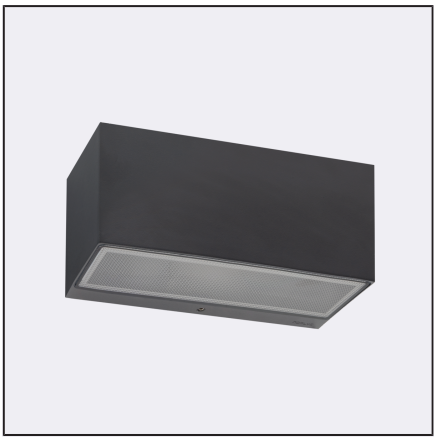

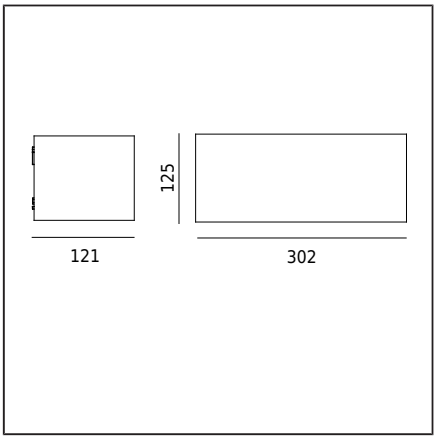

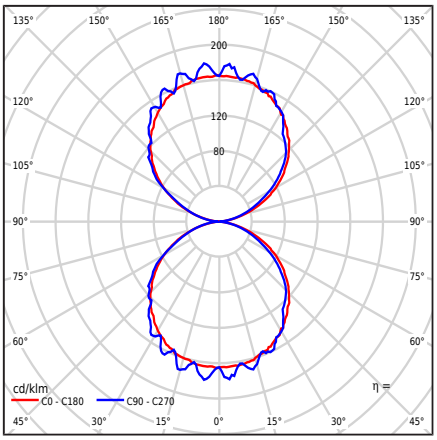

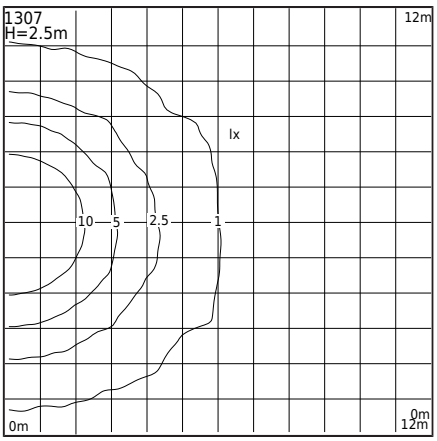

Type of luminaire

Type of luminaire	Wall light,
Photometric body	Double-sided light: directed up and down.
Characteristics of the luminaire	A fixture with a wide range of applications, for lighting wall surfaces and facades as well as other architectural concepts. Suitable for emergency installations on DC voltage: DC 180...280V

General information

Materials	Powder painted aluminum cast. Lens - transparent polycarbonate with structure, UV stabilized. Silicone gasket. EPDM cable gland.
Mounting method	Fixture Mounting: intermediate plate with two adjustment holes 5x10mm, 45mm apart, directly two holes ø5mm, 68mm apart. According to the attached installation instructions.
Terminal	Terminal clamps: max 3x2.5mm², option to connect fixtures in loop max 3x1.5mm². Round cable with a diameter of ø7...10.5mm.
Type of light source	LED module, electronic power supply Replaceable (LED only) light source by a professional. Replaceable control gear by a professional.
Light control	Trailing edge (TE) dimming
Box dimensions [cm]	34,5cm x 15cm x 17cm
Luminaire dimensions [cm]	30,2cm x 12cm x 12,5cm

Technical data

2 LED modules	Cree DK200305 V3 JB2835 3V 2,7K R03 (Datasheet)
Driver	Yes
Driver durability	50000h
External control	Dim. TRIAC (KGP) (User manual)
Light source wattage	10,6 W
Luminaire wattage	13,3 W
Lamp luminous flux	1922lm
Luminaire luminous flux	1144lm
Efficiency of the luminaire	86lm/W
Color temperature	2700K
Colour consistency (McAdam ellipse)	SDCM3
Flicker of light (Pst LM)	≤1
Strobe effect (SVM)	≤0.4
Colour rendering index CRI	80
L80TM-21 [wg LM-80]	>102 000h
L90 TM-21 [wg LM-80]	>52 600h
Power Factor luminaire	PF ≥0.92
THD factor	≤15%
Ta Rated temperature	+25°C
Ambient operating temp. range	-20...+45°C

This product contains light sources of energy efficiency class D

Optionally, the fixture is also available with:
- mode/dimming: DALI2
- for a different luminous flux value
- for a different fixture color (according to the RAL color chart)

Sales conditions and additional information to be agreed with the Norlys Sales Department.

Inrush current	10A/13,5µs
BUG rating	B0-U4-G0

Maximum number of luminaires of this type per MCB:

B 10A: 60, B 16A: 96, C 10A: 37, C 16A: 96

Spare parts

ZS1307zx0009	Service set.
ZS4699101114	Service set LED
ZS4699900615	Service set power supply

Norlys AS
P.B 1014 Hoff, 0218
Oslo
Hovfaret 4B, 0275
Oslo
Norway
+47 24 12 40 11
firmapost@norlys.no

TÜVRheinland CERTIFIED — Management System ISO 9001:2015 IATF 16949:2016 — www.tuv.com ID 9108651873

PCC cert CERTIFICATE ISO 14001

RoHS 2011/65/UE

Before starting the assembly, read the instructions provided with the fixture. Installation and service work must be carried out by a person with appropriate authorizations and qualifications, in accordance with applicable regulations. Due to the dynamic development of lighting technology, we provide additional information at the customer's request. Condensation that may occur in fixtures is a natural phenomenon and does not affect the quality of the fixture.

ASKER BIG PRO 1307

Files to download

Photometric LDT files	Photometric IES files
BIM Revit	BIM ArchiCAD

Indexes

Index	Color	RAL
1307AL	ALUMINUM	9006
1307BL	BLACK	9005
1307GR	GRAPHITE	7016
1307WH	WHITE	9003

Other colors according to the "Colors Template" / RAL pattern book - available on request, subject to agreement with Norlys' Sales Department.

Norlys AS
P.B 1014 Hoff, 0218
Oslo
Hovfaret 4B, 0275
Oslo
Norway
+47 24 12 40 11
firmapost@norlys.no

Management System ISO 9001:2015 IATF 16949:2016
www.tuv.com ID 9108651873
CERTIFICATE ISO 14001
RoHS 2011/65/UE

Before starting the assembly, read the instructions provided with the fixture. Installation and service work must be carried out by a person with appropriate authorizations and qualifications, in accordance with applicable regulations. Due to the dynamic development of lighting technology, we provide additional information at the customer's request. Condensation that may occur in fixtures is a natural phenomenon and does not affect the quality of the fixture.