


NORLYS ASKER 1310


IP 65 | IK 10 | AC 220-240V 50-60Hz | LED | DIM

Asker 1310XX0010
14.10.2026 v.10.20
www.norlys.no

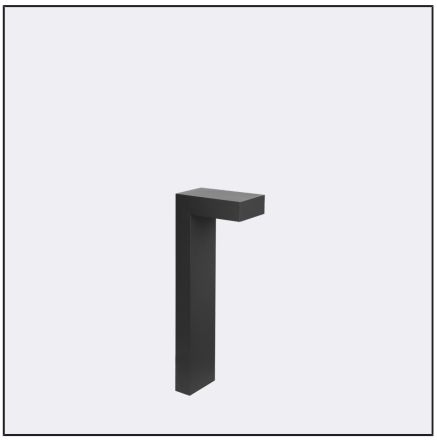

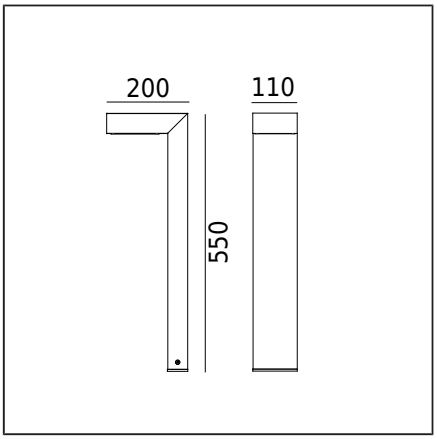

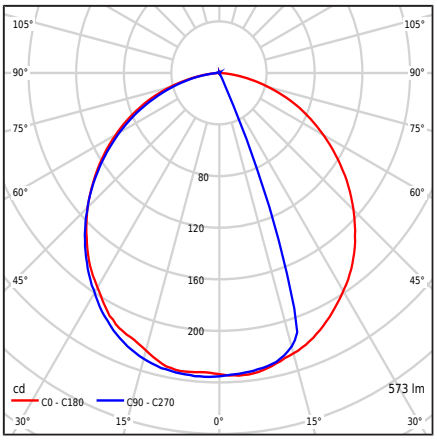

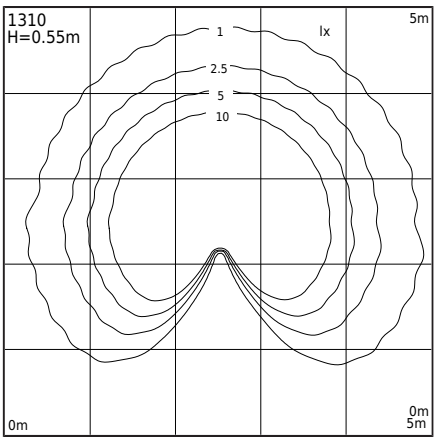

Type of luminaire

Type of luminaire	Post light fixture.
Photometric body	Light shielded and directed downward.
Characteristics of the luminaire	A fixture with contemporary design. For lighting private areas and other architectural concepts.

General information

Materials	Powder painted aluminum cast. Lens - transparent polycarbonate with structure, UV stabilized. Silicone gasket. EPDM cable gland.
Mounting method	Fixture mounting: 4 holes ø8mm, spacing 18x50mm. Other accessories must be purchased separately.
Terminal	Connection terminals: max 3x2.5mm², possibility of connecting the fixture in a loop max 3x1.5mm². Cable in a round sheath with a diameter of max ø12.5mm.
Type of light source	LED module, electronic power supply Replaceable (LED only) light source by a professional.
Light control	Trailing edge (TE) dimming
Luminaire weight net / gross	3,04kg / 3,64kg
Box dimensions [cm]	57cm x 23cm x 14cm
Luminaire dimensions [cm]	55cm x 20cm x 11cm

Technical data

LED module	Cree DK180501 V3 JK3030 3V 3K (Datasheet)
Driver	Yes
Driver durability	50000h
External control	Philips Xitanium TE (User manual)
Light source wattage	5,6W
Luminaire wattage	7,2W
Lamp luminous flux	1030lm
Luminaire luminous flux	573lm
Efficiency of the luminaire	79,6lm/W
ULOR	0.63%
Color temperature	3000K
Colour consistency (McAdam ellipse)	SDCM3
Flicker of light (Pst LM)	≤0.1
Strobe effect (SVM)	≤0.4
Colour rendering index CRI	80
L80TM-21 [wg LM-80]	>102 000h
L90 TM-21 [wg LM-80]	>52 600h
Power Factor luminaire	PF > 0,9
THD factor	20%
Ta Rated temperature	+25°C
Ambient operating temp. range	-20...+45°C

This product contains light source of energy efficiency class E / EPREL

Luminaire au design contemporain. Pour l'éclairage des zones privées et d'autres concepts architecturaux.

Inrush current	1A / 15,2µs
BUG rating	B0-U1-G0

Accessories sold separately

1907ZX0009	Concreting anchor
3090GA0009	Mounting adapter
1909GA0010	Adapter for concrete foundation
3081XX0009	Mounting adapter
1908GA0009	Ground anchor

Spare parts

ZS1310xx0010	Repair kit.
ZS4699101111	Service set LED
ZS46999746	Service set power supply

Before starting the assembly, please read the instructions attached to the fixture. Due to the dynamic development of lighting technology, we provide additional information upon the customer's request. Condensation that may occur in the fixtures is a natural phenomenon and does not affect the quality of the fixture.

Norlys AS
P.B 1014 Hoff, 0218
Oslo
Hovfaret 4B, 0275
Oslo
Norway
+47 24 12 40 11
firmapost@norlys.no

TÜVRheinland CERTIFIED — Management System ISO 9001:2015 IATF 16949:2016 — www.tuv.com ID 9108651873

PCC cert CERTIFICATE ISO 14001

RoHS 2011/65/UE

NORLYS ASKER 1310

Files to download

Photometric LDT files	Photometric IES files
Manual	

Indexes

Index	Color	RAL
1310AL	ALUMINUM	9006
1310BL	BLACK	9005
1310CG	CEMENT GREY	7033
1310CB	COPPER BROWN	8004
1310CS	CORTEN STEEL	approx. 8011
1310GR	GRAPHITE	7016
1310GB	GREY BEIGE	7006

Other colors according to the "Colors Template" / RAL pattern book - available on request, subject to agreement with Norlys' Sales Department.

Norlys AS
P.B 1014 Hoff, 0218
Oslo
Hovfaret 4B, 0275
Oslo
Norway
+47 24 12 40 11
firmapost@norlys.no

Management System ISO 9001:2015 IATF 16949:2016
www.tuv.com ID 9108651873

CERTIFICATE ISO 14001

RoHS 2011/65/UE

Before starting the assembly, please read the instructions attached to the fixture. Due to the dynamic development of lighting technology, we provide additional information upon the customer's request. Condensation that may occur in the fixtures is a natural phenomenon and does not affect the quality of the fixture.