


NORLYS ASKER 1311

Asker 1311XX0014
16.09.2026 v.14.21
www.norlys.no



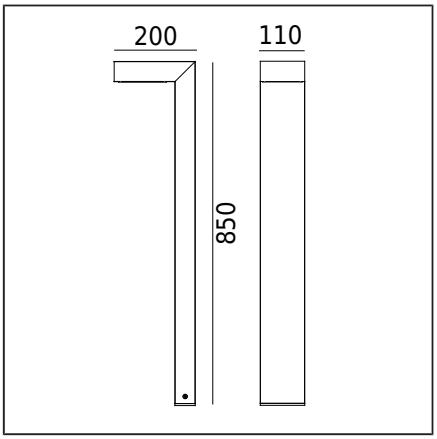

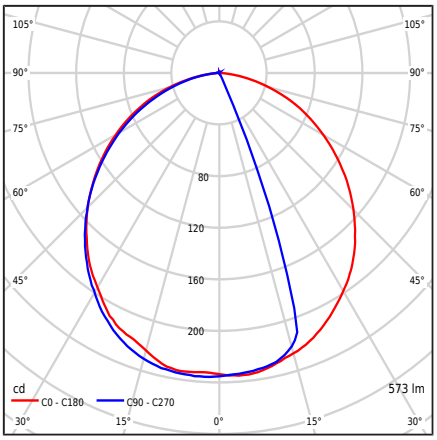

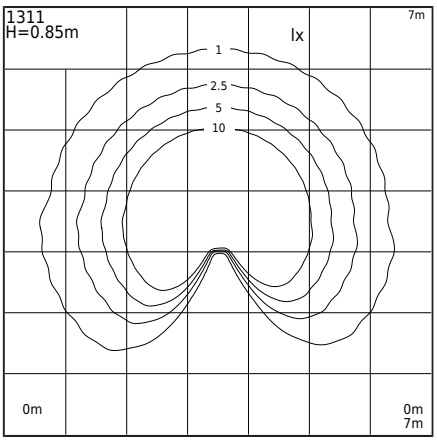

Type of luminaire

Type of luminaire	Post light fixture.
Photometric body	Downward-directed light.
Characteristics of the luminaire	A fitting with modern design. Suitable for lighting gardens, private areas, and other architectural applications.

General information

Materials	Powder painted aluminum cast. Lens - transparent polycarbonate with structure, UV stabilized. Silicone gasket. EPDM cable gland.
Mounting method	Fixture mounting: 4 holes ø8mm, spacing 18x50mm. As per the included installation manual. Other accessories need to be purchased separately.
Terminal	Connection terminals: max 3x2.4mm², possibility of looping the fixture with max 3x4mm². Cable in a round casing with a diameter of: ø4...8mm; ø8...12mm or ø10...13.6mm.
Type of light source	LED module, electronic power supply Replaceable (LED only) light source by a professional. Replaceable control gear by a professional.
Light control	Trailing edge (TE) dimming
Luminaire weight net / gross	4,01kg / 4,36kg
Box dimensions [cm]	88cm x 23cm x 13cm
Luminaire dimensions [cm]	85cm x 20cm x 11cm

Technical data

LED module	Cree DK180501 V8 JB2835 3V 3K (Datasheet)
Driver	Yes
Driver durability	50000h
External control	Philips Xitanium TE (User manual)
Light source wattage	5,6W
Luminaire wattage	7,2W
Lamp luminous flux	1030lm
Luminaire luminous flux	573lm
Efficiency of the luminaire	79,6lm/W
ULOR	0.63%
Color temperature	3000K
Colour consistency (McAdam ellipse)	SDCM3
Colour rendering index CRI	80
L80TM-21 [wg LM-80]	>102 000h
L90 TM-21 [wg LM-80]	>52 600h
Power Factor luminaire	PF >0.9
Ta Rated temperature	+25°C
Ambient operating temp. range	-20...+45°C

This product contains light source of energy efficiency class C / EPREL

Optionally, the fixture is also available:
- for a different fixture color (in accordance with the RAL color palette)
- for a different fixture height (not less than 55cm)
Terms of sale and other information, upon agreement with the Sales Department of Norlys.

BUG rating	B0-U1-G0

Accessories sold separately

1907ZX0009	Concreting anchor
3090GA0009	Mounting adapter
1909GA0010	Adapter for concrete foundation
3081XX0009	Mounting adapter
1908GA0009	Ground anchor

Norlys AS
P.B 1014 Hoff, 0218
Oslo
Hovfaret 4B, 0275
Oslo
Norway
+47 24 12 40 11
firmapost@norlys.no

Management System ISO 9001:2015 IATF 16949:2016
TÜVRheinland CERTIFIED
www.tuv.com ID 9108651873

PCC Cert CERTIFICATE ISO 14001

RoHS 2011/65/UE

Before starting the installation, it is necessary to familiarize yourself with the instructions attached to the fixture. Installation and maintenance work should be carried out by a person with appropriate authorizations and qualifications, in accordance with applicable regulations. Due to the dynamic development in lighting technology, additional information is provided upon client's request. Condensation that may occur in fixtures is a natural phenomenon and does not affect the deterioration of the fixture's quality.

Spare parts

ZS1311zx0014	Service set.
ZS4699101111	Service set LED
ZS46999746	Service set power supply

Files to download

Photometric LDT files	Photometric IES files
Manual	BIM Revit
BIM ArchiCAD	

Indexes

Index	Color	RAL
1311AL	ALUMINUM	9006
1311BL	BLACK	9005
1311CG	CEMENT GREY	7033
1311CB	COPPER BROWN	8004
1311CS	CORTEN STEEL	approx. 8011
1311GR	GRAPHITE	7016
1311GB	GREY BEIGE	7006

Other colors according to the "Colors Template" pattern book - available on request, subject to agreement with Norlys' Sales Department.

Norlys AS
P.B 1014 Hoff, 0218
Oslo
Hovfaret 4B, 0275
Oslo
Norway
+47 24 12 40 11
firmapost@norlys.no

Management System ISO 9001:2015 IATF 16949:2016
www.tuv.com ID 9108651873

CERTIFICATE ISO 14001

RoHS 2011/65/UE

Before starting the installation, it is necessary to familiarize yourself with the instructions attached to the fixture. Installation and maintenance work should be carried out by a person with appropriate authorizations and qualifications, in accordance with applicable regulations. Due to the dynamic development in lighting technology, additional information is provided upon client's request. Condensation that may occur in fixtures is a natural phenomenon and does not affect the deterioration of the fixture's quality.