
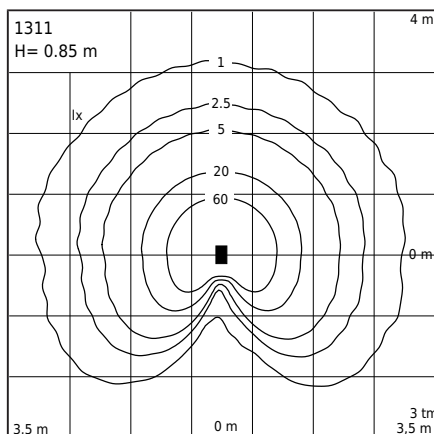
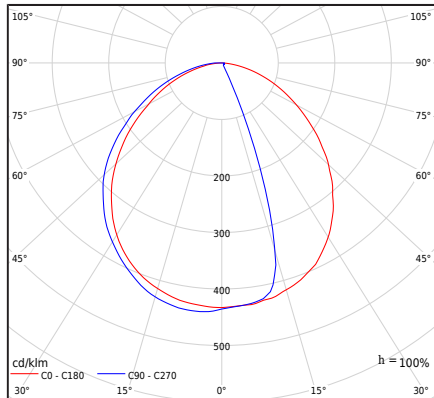


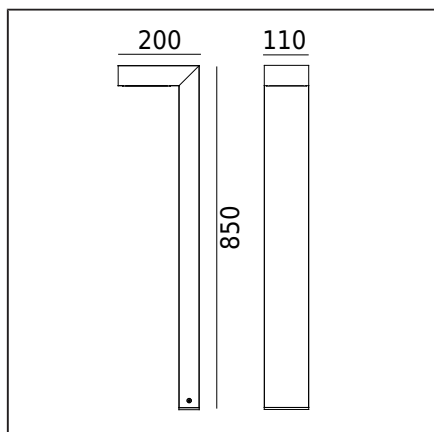

Type of luminaire

Type of luminaire	Post light fixture.
Photometric body	Diffuse downward-directed hemispherical light
Characteristics of the luminaire	Modern design luminaire. For lighting gardens and other private areas and public spaces.

General information

Materials	Powder painted aluminum cast. Lens - transparent polycarbonate with structure, UV stabilized. Silicone gasket.
Mounting method	Mounting the luminaire: 4 holes ø8mm, spacing 18x50mm.
Terminal	Connection terminals: max 3x2,5mm ² , possibility to connect luminaire in loop max 3x1,5mm ² . A round wire in the isolation with a diameter of max ø12,5mm.
Type of light source	LED module AC integrated
Light control	Non-dimmable fixture
Net / gross weight of luminaire	4,01kg / 4,36kg
Box dimensions [cm]	105,7cm x 10,7cm x 5cm

Technical data

Luminaire wattage	11,3W
Luminaire luminous flux	537lm
Efficiency of the luminaire	47,5lm/W
ULOR	0%
Color temperature	3000K
Colour consistency (McAdam ellipse)	SDCM3
Colour rendering index CRI	80
Rated life time L70/B50 at 25°C	50 000h
Power Factor luminaire	PF>0,90
Ta Rated temperature	+25°C, up to +50°C on request
Ambient temperature	Ta max=+65°C
BUG rating	B0-U1-G0

Maximum number of luminaires of this type per MCB:

B 10A: 51, B 16A: 84, C 10A: 87, C 16A: 142

Accessories sold separately

1907ZX0009	Concreting anchor
1908GA0009	Ground anchor
3081XX0009	Mounting adapter
3090GA0009	Mounting adapter

Spare parts

06131100	Lampshade.
08131100	Gasket.
46999648	LED module.

Files to download

Photometric LDT files

Photometric IES files

Manual

Indexes

Index	Color	RAL
1311AL	ALUMINUM	9006
1311BL	BLACK	9005
1311GR	GRAPHITE	7016