
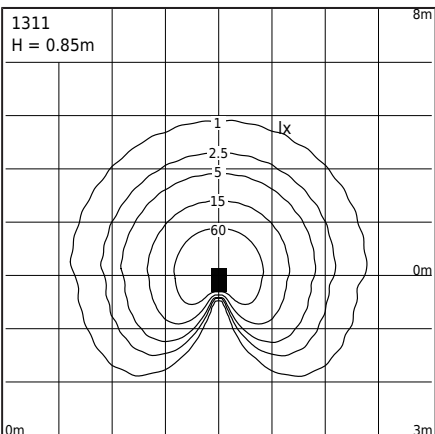
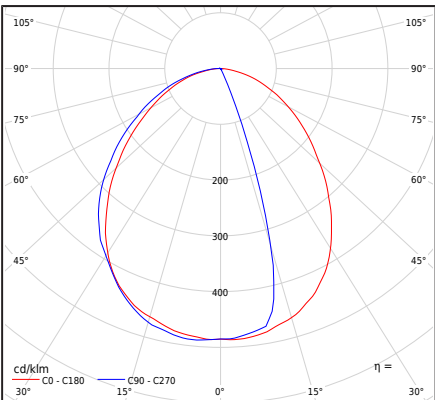


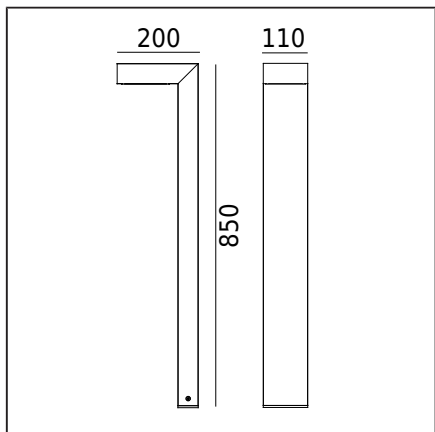

Art.nr	El.nummer	Farge	RAL
1311AL	3101770	ALUMINIUM	9006
1311GR	3101772	GRAFIT	7016
1311BL	3104143	SVART	9005

Generell informasjon

Type armatur	Stolpelys.
Materiale	Pulver lakkert aluminiumstøp
Avdeknings materiale/optikk	Polykarbonat med optisk struktur, UV stabilisert
Pakning	Silikonpakning
Andre materialer	EPDM-kabelnippel
Type lyskilde	LED modul AC
Lysstyring	Ikke-dimbart armatur
Netto / Brutto vekt armatur	4,01kg / 4,36kg
Forpakkingsstørrelse [cm]	105,7cm x 10,7cm x 5cm
Armaturemål [cm]	105,7cm x 10,7cm x 5cm

Tekniske data

Armatureffekt	9,5W
Lumen ut	585lm
Armatur Lumen/Watt	61,6lm/W
ULOR	0%
Fargetemperatur	3000K
Farvekonsistens (McAdam-Ellipse)	SDCM3
Fargegjengivelsesindeks	80
L70B50	50 000h
Energieffektivitetsindeks (EEI)	
Virkningsgrad	PF > 0,9
Ta nominel:	+25°C
Maksimal omgivelsestemperatur	Ta max=+65°C
Inrush current	2,98A / 34,07μs
BUG-vurdering	B0-U1-G0

Antall armaturer på automatsikring

B10A: 144, B16A: 230, C10A: 239, C16A: 391

Tilbehør Selges separat

1907ZX0009	Anker for innstøping
1908GA0009	Bakkeanker
3081XX0009	Monteringsadapter
3090GA0009	Monteringsadapter

Filer som kan lastes ned

Photometric LDT files, Photometric IES files, Manual, BIM Revit, BIM ArchiCAD