
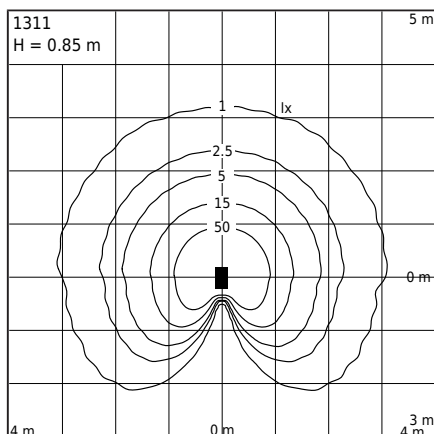
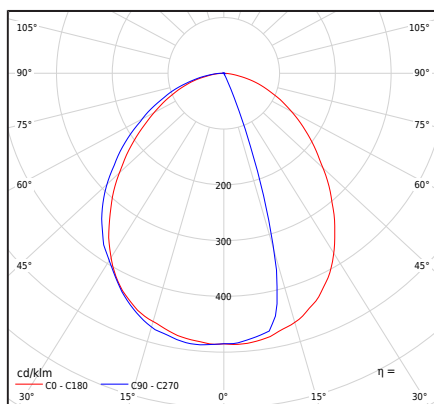


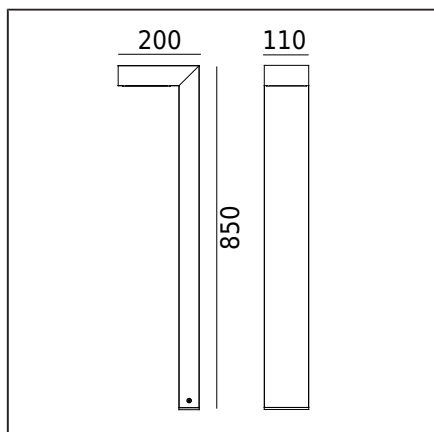

Type of luminaire

Type of luminaire	Post light fixture.
Photometric body	Diffuse downward-directed hemispherical light
Characteristics of the luminaire	Luminaire with a contemporary design. For lighting gardens, private areas and other architectural applications

General information

Materials	Powder painted aluminum cast. Lens - transparent polycarbonate with structure, UV stabilized. Silicone gasket. EPDM cable gland.
Mounting method	Luminaire mounting: 4 holes $\varnothing 8\text{mm}$, spacing $18 \times 50\text{mm}$ According to the attached assembly instructions Other accessories must be purchased separately
Terminal	Connection terminals: max $3 \times 2.5\text{mm}^2$ Possibility of connecting the luminaire in loops of max. $3 \times 1.5\text{mm}^2$ Round insulated cable with a maximum diameter of $\varnothing 12.5\text{mm}$
Type of light source	LED module AC integrated Replaceable (LED only) light source by a professional.
Light control	Non-dimmable fixture
Net / gross weight of luminaire	4,01kg / 4,36kg
Box dimensions [cm]	88cm x 23cm x 13cm
Luminaire dimensions [cm]	85cm x 20cm x 11cm

Technical data

Luminaire wattage	9,5W
Luminaire luminous flux	585lm
Efficiency of the luminaire	61,6lm/W
ULOR	0%
Color temperature	3000K
Colour consistency (McAdam ellipse)	SDCM3
Flicker of light (Pst LM)	≤ 0.5
Strobe effect (SVM)	≤ 0.4
Colour rendering index CRI	80
Rated life time L70/B50 at 25°C	50 000h
Power Factor luminaire	PF 0,9
THD factor	30%
Ta Rated temperature	+25°C, up to +50°C on request
Ambient temperature	Ta max = +65°C

This product contains light source of energy efficiency class **A** / **EPREL**

Optionally, the luminaire is also available:

- Version: phase dimmable
- For LED color 2700K [I/I]
- For a different color of the luminaire (according to the RAL color palette)
- For a different luminaire height

Terms of sale and other information, after contact with the Norlys Sales Department

Inrush current	2,98A / 34,07 μs
BUG rating	B0-U1-G0

Accessories sold separately

1907ZX0009	Concreting anchor
1908GA0009	Ground anchor
3081XX0009	Mounting adapter
3090GA0009	Mounting adapter

Spare parts

ZS1311zx0012	Service set.
--------------	--------------

Files to download

Photometric LDT files	Photometric IES files
Manual	BIM Revit
BIM ArchiCAD	



Indexes

Index	Color	RAL
1311AL	ALUMINUM	9006
1311BL	BLACK	9005
1311GR	GRAPHITE	7016