
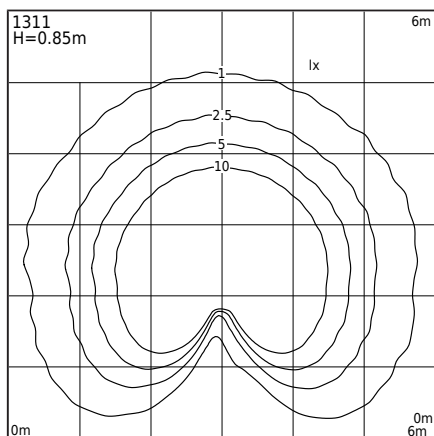
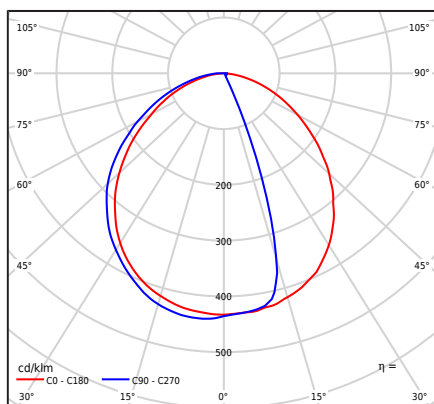


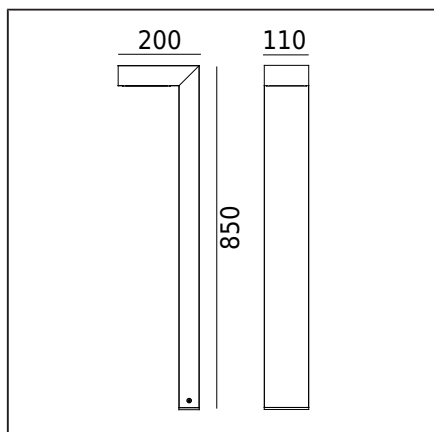

Type of luminaire

Type of luminaire	Post light fixture.
Photometric body	Diffuse downward-directed hemispherical light
Characteristics of the luminaire	Luminaire with contemporary design. For lighting private areas and other architectural concepts

General information

Materials	Powder painted aluminum cast. Lens - transparent polycarbonate with structure, UV stabilized. Silicone gasket.
Mounting method	Mounting of the luminaire: 4 holes ø8mm, spacing 18x50mm. Other accessories must be purchased separately
Terminal	Connection terminals: max 3x2.5mm². Possibility to connect the luminaire in loops, max 3x1.5mm². Round insulated cable with a diameter of max ø12.5mm
Type of light source	LED module AC integrated Replaceable (LED only) light source by a professional.
Light control	Non-dimmable fixture
Box dimensions [cm]	22,3cm x 12,8cm x 87cm

Technical data

Luminaire wattage	10,3W
Luminaire luminous flux	537lm
Efficiency of the luminaire	52,1lm/W
ULOR	0%
Color temperature	3000K
Colour consistency (McAdam ellipse)	SDCM3
Colour rendering index CRI	80
Rated life time L70/B50 at 25°C	50 000h
Power Factor luminaire	PF > 0,9
Ta Rated temperature	+25°C, up to +50°C on request
Ambient temperature	Ta max=+65°C
BUG rating	B0-U1-G0

Accessories sold separately

1907ZX0009	Concreting anchor
1908GA0009	Ground anchor
3081XX0009	Mounting adapter
3090GA0009	Mounting adapter

Spare parts

ZS1311zx0013	Service set.
--------------	--------------

Files to download

Photometric LDT files	Photometric IES files
Manual	BIM Revit
BIM ArchiCAD	

Indexes

Index	Color	RAL
1311BL	BLACK	9005
1311GR	GRAPHITE	7016