

NORLYS ASKER 1313


AC 220-240V 50-60Hz | IP 65 | IK 10 | LED | DIM

Asker 1313XX0009
14.10.2026 v.09.10
www.norlys.no



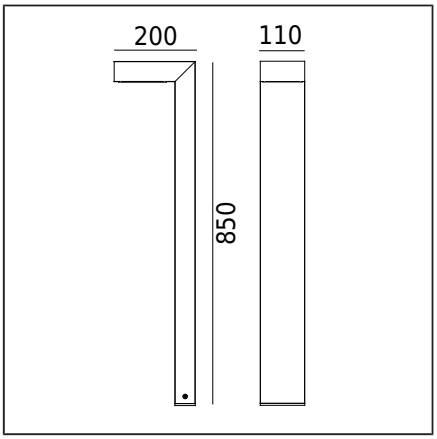

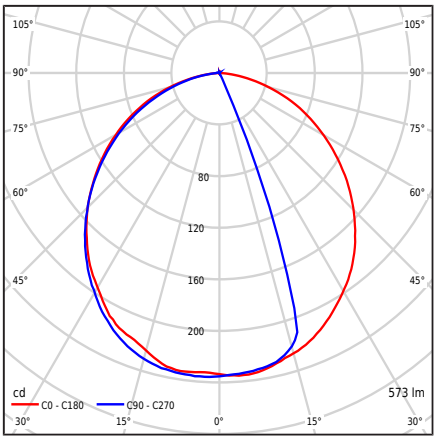

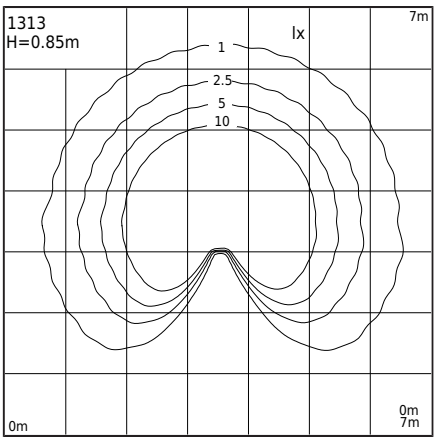

Type of luminaire

Type of luminaire	Post light fixture.
Photometric body	Downward-directed light.
Characteristics of the luminaire	A fixture with contemporary design. For lighting gardens, private areas, and other architectural applications.

General information

Materials	Powder painted aluminum cast. Lens - transparent polycarbonate with structure, UV stabilized. Silicone gasket. EPDM cable gland.
Mounting method	Fixture mounting: 4 holes ø8mm, spacing 18x50mm. According to the attached installation instructions. Additional accessories should be purchased separately.
Terminal	Connection terminals: max 3x2.4mm², possibility of looping the fixture max 3x4mm². Circular cable with a diameter: ø4...8mm; ø8...12mm or ø10...13.6mm.
Type of light source	LED module, electronic power supply Replaceable (LED only) light source by a professional. Replaceable control gear by a professional.
Light control	Trailing edge (TE) dimming
Luminaire weight net / gross	4,01kg / 4,36kg
Box dimensions [cm]	88cm x 23cm x 13cm
Luminaire dimensions [cm]	85cm x 20cm x 11cm

Technical data

LED module	Cree DK180501 V8 JB2835 3V 2,7K (Datasheet)
Driver	Yes
Driver durability	50000h
External control	Philips Xitanium TE (User manual)
Light source wattage	5,6W
Luminaire wattage	7,2W
Lamp luminous flux	992lm
Luminaire luminous flux	543lm
Efficiency of the luminaire	75,4lm/W
ULOR	0.6%
Color temperature	2700K
Colour consistency (McAdam ellipse)	SDCM3
Flicker of light (Pst LM)	≤1
Strobe effect (SVM)	≤0.4
Colour rendering index CRI	80
L90 TM-21 [wg LM-80]	>h
Power Factor luminaire	PF > 0,9
THD factor	< 20%
Ta Rated temperature	+25°C
Ambient operating temp. range	-20...+45°C

This product contains light source of energy efficiency class D / EPREL

Optionally, the fixture is also available:
- in a different fixture color (according to the RAL color palette)
- in a different fixture height (not less than 55cm)
Sales conditions and other information are to be agreed with the Norlys Sales Department.

BUG rating	B0-U1-G0

Accessories sold separately

1907ZX0009	Concreting anchor
3090GA0009	Mounting adapter
1909GA0010	Adapter for concrete foundation
3081XX0009	Mounting adapter
1908GA0009	Ground anchor

Norlys AS
P.B 1014 Hoff, 0218
Oslo
Hovfaret 4B, 0275
Oslo
Norway
+47 24 12 40 11
firmapost@norlys.no

TÜVRheinland CERTIFIED — Management System ISO 9001:2015 IATF 16949:2016 — www.tuv.com ID 9108651873

PCC Cert CERTIFICATE ISO 14001

RoHS 2011/65/UE

Before starting the installation, familiarize yourself with the instructions included with the fixture. Installation and maintenance work should be carried out by a person with the relevant authorizations and qualifications, in accordance with the applicable regulations. Due to the dynamic development of lighting technology, we provide additional information upon the customer's request. Condensation that may occur in the fixtures is a natural phenomenon and does not affect the quality of the fixture.

Spare parts

ZS1313zx0009	Repair kit.
ZS4699101113	Service set LED
ZS46999746	Service set power supply

Files to download

Photometric LDT files	Photometric IES files
Manual	BIM Revit
BIM ArchiCAD	

Indexes

Index	Color	RAL
1313AL	ALUMINUM	9006
1313BL	BLACK	9005
1313GR	GRAPHITE	7016

Other colors according to the "Colors Template" / RAL pattern book - available on request, subject to agreement with Norlys' Sales Department.

Norlys AS
P.B 1014 Hoff, 0218
Oslo
Hovfaret 4B, 0275
Oslo
Norway
+47 24 12 40 11
firmapost@norlys.no

Management System ISO 9001:2015 IATF 16949:2016
www.tuv.com ID 9108651873

CERTIFICATE ISO 14001

RoHS 2011/65/UE

Before starting the installation, familiarize yourself with the instructions included with the fixture. Installation and maintenance work should be carried out by a person with the relevant authorizations and qualifications, in accordance with the applicable regulations. Due to the dynamic development of lighting technology, we provide additional information upon the customer's request. Condensation that may occur in the fixtures is a natural phenomenon and does not affect the quality of the fixture.