



NORLYS ASKER PRO BUTTON 1314/0A

Asker pro button
1314XX0A11
21.09.2026 v.11.15
www.norlys.no

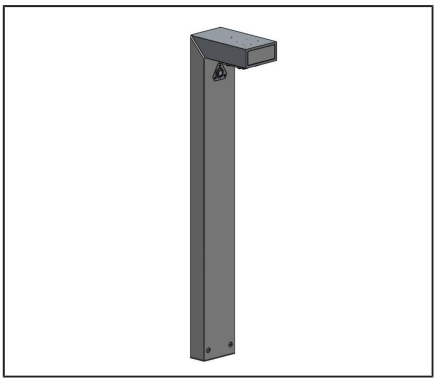

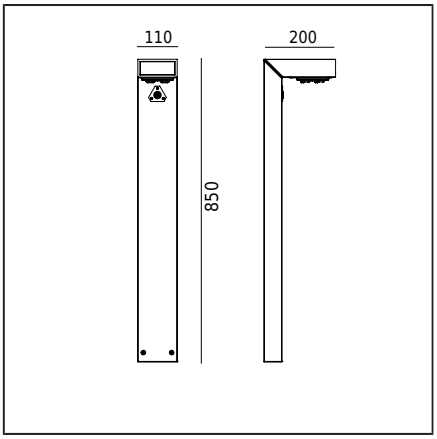

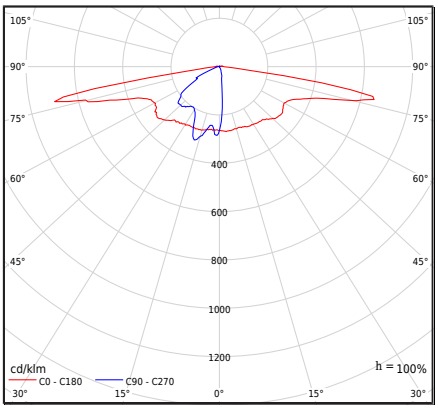

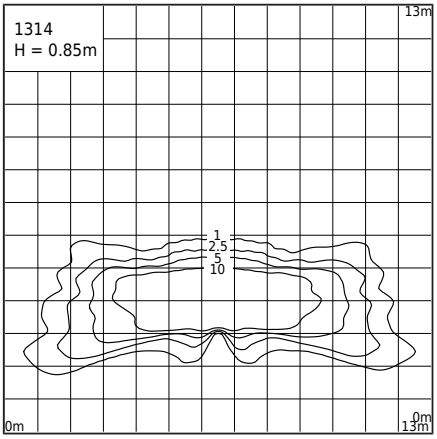

Type of luminaire

Type of luminaire	Post light fixture.
Photometric body	Ledil lens type SCL (IESNA type II / III)
Characteristics of the luminaire	A fixture with contemporary design. For lighting gardens and other private areas. The fixture is equipped with an illuminated button, used for lighting control. The electrical schematic of the fixture is in the customer manual.

General information

Materials	Powder painted aluminum cast. The outer hermetic lens - transparent PMMA plastic Silicone gasket. EPDM cable gland.
Mounting method	Fixture mounting: 4 ø8mm holes, spacing 18x50mm. Fixture mounting: 4 ø8mm holes, spacing 18x50mm. According to the attached installation manual. Note: Before starting fixture installation work, pay attention to the position of the button.
Terminal	Connection terminals: max 5x4mm², possibility of looping the fixture max 5x2.5mm². Cable in a round sheath with a maximum diameter of ø14mm. According to the included installation instructions.
Type of light source	Optical kit with IP67 (LED module and lens); electronic power supply Replaceable (LED only) light source by a professional. Replaceable control gear by a professional.
Light control	Trailing edge (TE) dimming
Luminaire weight net / gross	4,5kg / 4,85kg
Box dimensions [cm]	88cm x 23cm x 13cm
Luminaire dimensions [cm]	85cm x 20cm x 11cm

Technical data

LED module	Cree DK200402 V1 XTE-HE 3K (Datasheet)
Driver	Yes
Driver durability	50000h
External control	According to the design.
Light source wattage	5,8W
Luminaire wattage	7,7W
Lamp luminous flux	828lm
Luminaire luminous flux	697lm
Efficiency of the luminaire	90,5lm/W
ULOR	1%
Color temperature	3000K
Colour consistency (McAdam ellipse)	SDCM3
Colour rendering index CRI	80
L90 TM-21 [wg LM-80]	>109 000h
LED photobiological threat	RG0 or RG1
Power Factor luminaire	PF > 0,90
Ta Rated temperature	+25°C
Ambient operating temp. range	-20...+45°C

This product contains light source of energy efficiency class F / EPREL

Possibility of mounting a different type of lenses.
Order fulfillment date to be agreed with the Sales Department of Norlys Ltd.

BUG rating	B1-U1-G1

Maximum number of luminaires of this type per MCB:

B 10A: 126, B 16A: 200, C 10A: 208, C 16A: 340

Accessories sold separately

1907ZX0009	Concreting anchor
3081XX0009	Mounting adapter
3090GA0009	Mounting adapter
1909GA0010	Adapter for concrete foundation
1908GA0009	Ground anchor

Norlys AS
P.B 1014 Hoff, 0218
Oslo
Hovfaret 4B, 0275
Oslo
Norway
+47 24 12 40 11
firmapost@norlys.no

TÜVRheinland CERTIFIED
Management System ISO 9001:2015 IATF 16949:2016
www.tuv.com ID 9108651873
PCC Cert CERTIFICATE ISO 14001
RoHS 2011/65/UE

Before starting installation, please familiarize yourself with the instructions included with the fixture. Installation and service works should be performed by a person with appropriate authorizations and qualifications, in accordance with valid regulations. Due to the dynamic development of lighting technology, we provide additional information at the customer's request. Condensation that may occur in fixtures is a natural phenomenon and does not affect the quality of the fixture.

ASKER PRO BUTTON 1314/0A

Spare parts

ZN0913140A0112	Monostable button.
ZN1314xx0A11	Service set.
ZN4699900000	Hermetic lens CS15761_STRADA-2X2MX-8-SCL.
ZN46999697	Service set power supply

Files to download

Photometric LDT files	Photometric IES files
Manual	BIM Revit
BIM ArchiCAD	

Indexes

Index	Color	RAL
1314/0AAL	ALUMINUM	9006
1314/0ABL	BLACK	9005
1314/0AGR	GRAPHITE	7016

Other colors according to the "Colors Template" / RAL pattern book - available on request, subject to agreement with Norlys' Sales Department.

Norlys AS
P.B 1014 Hoff, 0218
Oslo
Hovfaret 4B, 0275
Oslo
Norway
+47 24 12 40 11
firmapost@norlys.no

Management System ISO 9001:2015 IATF 16949:2016
www.tuv.com ID 9108651873
CERTIFICATE ISO 14001
RoHS 2011/65/UE

Before starting installation, please familiarize yourself with the instructions included with the fixture. Installation and service works should be performed by a person with appropriate authorizations and qualifications, in accordance with valid regulations. Due to the dynamic development of lighting technology, we provide additional information at the customer's request. Condensation that may occur in fixtures is a natural phenomenon and does not affect the quality of the fixture.