

# NORLYS ASKER PRO 1318


AC 220-240V 50-60Hz | IP 65 | IK 08 | LED | DIM

Asker pro 1318XX0011
14.10.2026 v.11.4
www.norlys.no

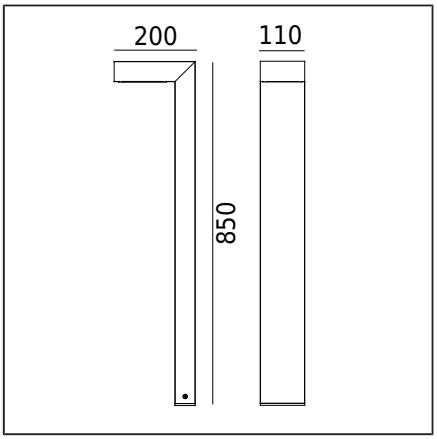

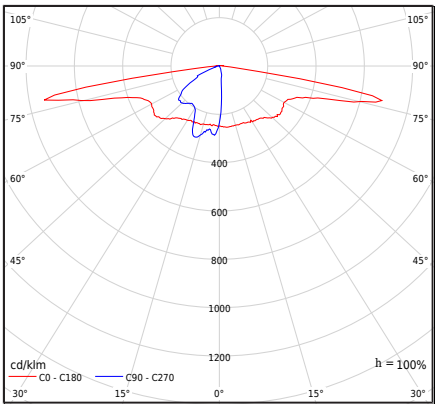


## Type of luminaire
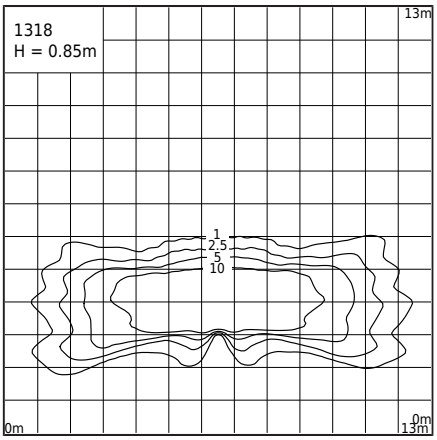
| | |
|---|---|
| Type of luminaire | Post light fixture. |
| Photometric body | Ledil lens type SCL (IESNA type II / III) |
| Characteristics of the luminaire | A luminaire with a contemporary design. For lighting gardens and other private areas. |

## General information

| | |
|---|---|
| Materials | Powder painted aluminum cast. The outer hermetic lens - transparent PMMA plastic Silicone gasket. EPDM cable gland. |
| Mounting method | Mounting of the luminaire: 4 holes ø8mm, spacing 18x50mm |
| Terminal | Connection terminals: max 3x2.5mm²<br>Possibility of connecting the luminaire in loops of max. 3x1.5mm²<br>Round insulated cable with a maximum diameter of ø12.5mm |
| Type of light source | Optical kit with IP67 (LED module and lens); electronic power supply<br>Replaceable (LED only) light source by a professional.<br>Replaceable control gear by a professional. |
| Light control | Trailing edge (TE) dimming |
| Luminaire weight net / gross | 4,01kg / 4,36kg |
| Box dimensions [cm] | 88cm x 23cm x 13cm |
| Luminaire dimensions [cm] | 20cm x 11cm x 85cm |

## Technical data

| | |
|---|---|
| LED module | Cree DK200402 V1 XTE-HE 3V 4K. (Datasheet) |
| Driver | Yes |
| Driver durability | 50000h |
| External control | Philips Xitanium TE (User manual) |
| Light source wattage | 5,8W |
| Luminaire wattage | 7,7W |
| Lamp luminous flux | 828lm |
| Luminaire luminous flux | 724lm |
| Efficiency of the luminaire | 94lm/W |
| ULOR | 1% |
| Color temperature | 4000K |
| Colour consistency (McAdam ellipse) | SDCM3 |
| Colour rendering index CRI | 80 |
| L90 TM-21 [wg LM-80] | 109 000h |
| LED photobiological threat | RG1 or RG2 |
| Power Factor luminaire | PF > 0,95 |
| THD factor | < 20% |
| Ta Rated temperature | +25°C |
| Ambient operating temp. range | -20...+45°C |

This product contains light source of energy efficiency class F / EPREL

Possibility to install other types of lenses.
Terms of sale and other information, after contact with the Norlys Sp. z o.o. Sales Department.

| | |
|---|---|
| Inrush current | 3,36A/36µs |
| BUG rating | B1-U1-G1 |

## Accessories sold separately

| | |
|---|---|
| 1907ZX0009 | Concreting anchor |
| 3090GA0009 | Mounting adapter |
| 1909GA0010 | Adapter for concrete foundation |
| 3081XX0009 | Mounting adapter |
| 1908GA0009 | Ground anchor |

## Spare parts

| | |
|---|---|
| 4699102108 | LED module. |
| 4699900000 | Hermetic lens CS15761_STRADA-2X2MX-8-SCL. |
| 46999697 | Power supply. |
| ZS1318zx0011 | Repair kit. |

Norlys AS
P.B 1014 Hoff, 0218
Oslo
Hovfaret 4B, 0275
Oslo
Norway
+47 24 12 40 11
firmapost@norlys.no

TÜVRheinland CERTIFIED — Management System ISO 9001:2015 IATF 16949:2016 — www.tuv.com ID 9108651873

PCC cert CERTIFICATE ISO 14001

RoHS 2011/65/UE

Before the installation, please read the instructions included with the luminaire. Installation and service work are carried out by a person with appropriate authorizations and qualifications, in accordance with applicable regulations. Due to the dynamic development of lighting technology, we provide additional information upon customer request. Condensation that may occur in luminaires is a natural phenomenon and does not affect the quality of the luminaire.

# ASKER PRO 1318



## Files to download

| | |
|---|---|
| Photometric LDT files | Photometric IES files |
| Manual | BIM Revit |
| BIM ArchiCAD | |

## Indexes

| Index | Color | RAL |
|---|---|---|
| 1318AL | ALUMINUM | 9006 |
| 1318BL | BLACK | 9005 |
| 1318GR | GRAPHITE | 7016 |

Other colors according to the "Colors Template" / RAL pattern book - available on request, subject to agreement with Norlys' Sales Department.

Norlys AS
P.B 1014 Hoff, 0218
Oslo
Hovfaret 4B, 0275
Oslo
Norway
+47 24 12 40 11
firmapost@norlys.no

Management System ISO 9001:2015 IATF 16949:2016
www.tuv.com ID 9108651873

CERTIFICATE ISO 14001

RoHS 2011/65/UE

Before the installation, please read the instructions included with the luminaire. Installation and service work are carried out by a person with appropriate authorizations and qualifications, in accordance with applicable regulations. Due to the dynamic development of lighting technology, we provide additional information upon customer request. Condensation that may occur in luminaires is a natural phenomenon and does not affect the quality of the luminaire.