

NORLYS ASKER PRO 1322


AC 220-240V 50-60Hz | IP 65 | IK 08 | LED | DALI2

Asker pro
1322XX0011
14.10.2026 v.11.4
www.norlys.no



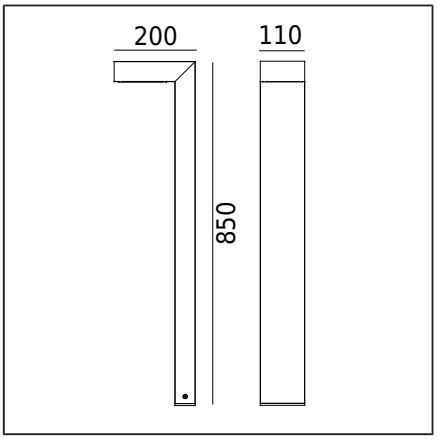

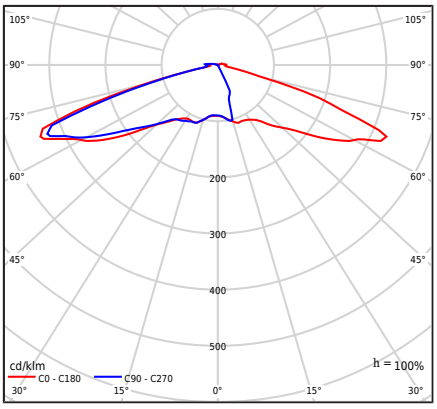

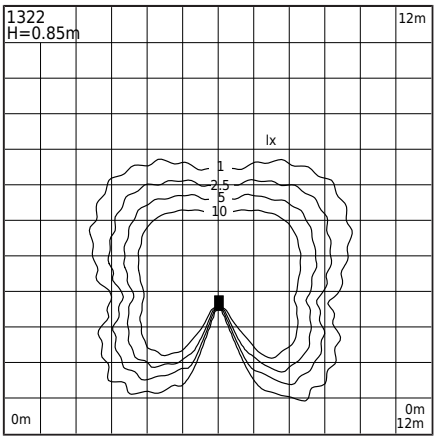

Type of luminaire

Type of luminaire	Post light fixture.
Photometric body	Lens from Ledil type VSM (IESNA type V)
Characteristics of the luminaire	A luminaire with a contemporary design. For lighting gardens and other private areas.

General information

Materials	Powder painted aluminum cast. The outer hermetic lens - transparent PMMA plastic Silicone gasket. EPDM cable gland.
Mounting method	Mounting of the luminaire: 4 holes ø8mm, spacing 18x50mm
Terminal	Connection terminals: max 3x2.5mm² Possibility of connecting the luminaire in loops of max. 3x1.5mm² Round insulated cable with a maximum diameter of ø12.5mm
Type of light source	LED module, DALI / TD electronic power supply Replaceable (LED only) light source by a professional. Replaceable control gear by a professional.
Light control	Light control in the system: DALI2/TD.
Luminaire weight net / gross	4,51kg / 5,06kg
Box dimensions [cm]	88cm x 23cm x 13cm

Technical data

LED module	Cree DK200402 V1 XTE-HE 3K (Datasheet)
Driver	Yes
Driver durability	100000h
Light source wattage	5,8W
Luminaire wattage	7,8W
Lamp luminous flux	828lm
Luminaire luminous flux	616lm
Efficiency of the luminaire	79lm/W
ULOR	2%
Color temperature	4000K
Colour consistency (McAdam ellipse)	SDCM3
Flicker of light (Pst LM)	≤1
Strobe effect (SVM)	≤0.4
Colour rendering index CRI	80
L90 TM-21 [wg LM-80]	109 000h
LED photobiological threat	RG1 or RG2
Power Factor luminaire	PF > 0,8
THD factor	< 10%
Ta Rated temperature	+25°C
Ambient operating temp. range	-20...+45°C

This product contains light source of energy efficiency class F / EPREL

Possibility to install other types of lenses.
Terms of sale and other information, after contact with the Norlys Sp. z o.o. Sales Department.

Inrush current	5A / 220µs
BUG rating	B1-U1-G1

Maximum number of luminaires of this type per MCB:

B 10A: 82, B 16A: 130

Accessories sold separately

1907ZX0009	Concreting anchor
3090GA0009	Mounting adapter
1909GA0010	Adapter for concrete foundation
3081XX0009	Mounting adapter
1908GA0009	Ground anchor

Spare parts

ZS1322xx0011	Repair kit.

Norlys AS
P.B 1014 Hoff, 0218
Oslo
Hovfaret 4B, 0275
Oslo
Norway
+47 24 12 40 11
firmapost@norlys.no

TÜVRheinland CERTIFIED — Management System ISO 9001:2015 IATF 16949:2016 — www.tuv.com ID 9108651873

PCC Cert CERTIFICATE ISO 14001

RoHS 2011/65/UE

Before the installation, please read the instructions included with the luminaire. Installation and service work are carried out by a person with appropriate authorizations and qualifications, in accordance with applicable regulations. Due to the dynamic development of lighting technology, we provide additional information upon customer request. Condensation that may occur in luminaires is a natural phenomenon and does not affect the quality of the luminaire.

NORLYS ASKER PRO 1322



Files to download

Photometric LDT files	Photometric IES files
Manual	BIM Revit
BIM ArchiCAD	

Indexes

Index	Color	RAL
1322AL	ALUMINUM	9006
1322BL	BLACK	9005
1322GR	GRAPHITE	7016

Other colors according to the "Colors Template" / RAL pattern book - available on request, subject to agreement with Norlys' Sales Department.

Norlys AS
P.B 1014 Hoff, 0218
Oslo
Hovfaret 4B, 0275
Oslo
Norway
+47 24 12 40 11
firmapost@norlys.no

TÜVRheinland CERTIFIED
Management System ISO 9001:2015 IATF 16949:2016
www.tuv.com ID 9108651873

PCC Cert CERTIFICATE ISO 14001

RoHS 2011/65/UE

Before the installation, please read the instructions included with the luminaire. Installation and service work are carried out by a person with appropriate authorizations and qualifications, in accordance with applicable regulations. Due to the dynamic development of lighting technology, we provide additional information upon customer request. Condensation that may occur in luminaires is a natural phenomenon and does not affect the quality of the luminaire.