

# NORLYS HITRA 1331


IP 65 | IK 06 | LED | No Dim

Hitra 1331XX0009
02.11.2026 v.09.11
www.norlys.no

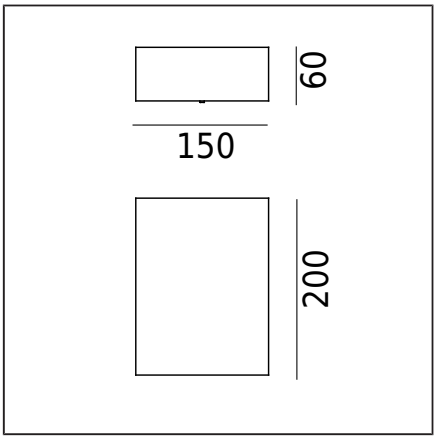

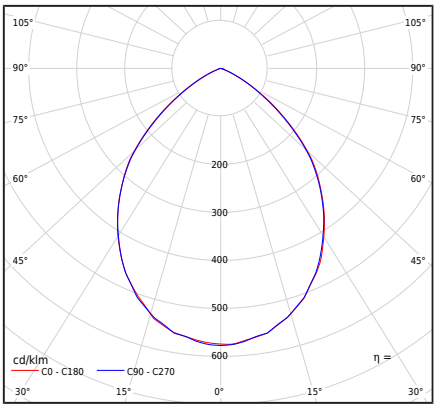


## Type of luminaire
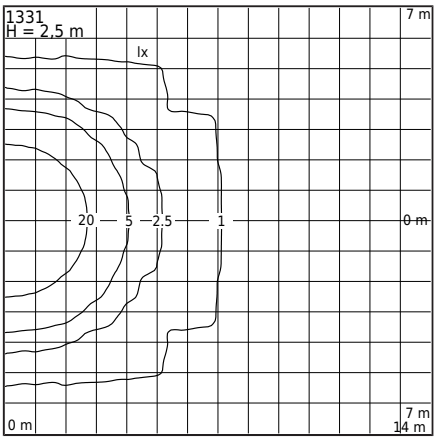
| | |
|---|---|
| Type of luminaire | Wall light, |
| Photometric body | Diffuse downward-directed hemispherical light |
| Characteristics of the luminaire | A fixture with contemporary design. For lighting private areas and other architectural concepts. |

## General information

| | |
|---|---|
| Materials | Powder painted aluminum cast. Lampshade - safety glass, transparent. Silicone gasket. EPDM cable gland. |
| Mounting method | Fixture mounting: 2 holes ø4mm, spacing 104mm. Other accessories must be purchased separately. |
| Terminal | Connection terminals: max 3x2.5mm², option to connect the fixture in a loop max 3x1.5mm². Cable in a round sheath with a diameter of ø7...10.5mm. |
| Type of light source | LED module AC integrated Replaceable (LED only) light source by a professional. |
| Light control | Non-dimmable fixture |
| Luminaire weight net / gross | 1,41kg / 1,58kg |
| Box dimensions [cm] | 23cm x 16cm x 8cm |

## Technical data

| | |
|---|---|
| LED module | Philips Fortimo DLM ES 2000/8xx G2 3K (Datasheet) |
| Light source wattage | 17,5W |
| Luminaire wattage | 17,5W |
| Lamp luminous flux | 1950lm |
| Luminaire luminous flux | 1599lm |
| Efficiency of the luminaire | 91,4lm/W |
| ULOR | 0% |
| Color temperature | 3000K |
| Colour consistency (McAdam ellipse) | SDCM3 |
| Colour rendering index CRI | 80 |
| L70TM-21 [wg LM-80] | >50 000h |
| Power Factor luminaire | PF > 0,9 |
| Ta Rated temperature | +25°C |
| Ambient operating temp. range | -20...+45°C |
| This product contains light source of energy efficiency class E / EPREL | |
| Inrush current | 3,01A/32,66µs |
| BUG rating | B1-U1-G0 |
| Comment | On request IK08 |

## Accessories sold separately

| | |
|---|---|
| 151XX0009 | Corner bracket |

## Spare parts

| | |
|---|---|
| ZS1331zx0009 | Repair kit. |

## Files to download

| | |
|---|---|
| Photometric LDT files | Photometric IES files |
| Manual | BIM ArchiCAD |

## Indexes

| Index | Color | RAL |
|---|---|---|
| 1331AL | ALUMINUM | 9006 |
| 1331GR | GRAPHITE | 7016 |
| 1331WH | WHITE | 9003 |

Other colors according to the "Colors Template" / RAL pattern book - available on request, subject to agreement with Norlys' Sales Department.


Norlys AS
P.B 1014 Hoff, 0218
Oslo
Hovfaret 4B, 0275
Oslo
Norway
+47 24 12 40 11
firmapost@norlys.no


TÜVRheinland CERTIFIED — Management System ISO 9001:2015 IATF 16949:2016 — www.tuv.com ID 9108651873

PCC cert CERTIFICATE ISO 14001

RoHS 2011/65/UE


Before starting the assembly, you should familiarize yourself with the instructions attached to the fixture. Due to the dynamic development of lighting technology, we provide additional information upon customer request. Condensation, which may occur in fixtures, is a natural phenomenon and does not affect the deterioration of the fixture's quality.