


NORLYS ASKER 1336

Asker 1336XX0009
09.11.2026 v.09.18
www.norlys.no

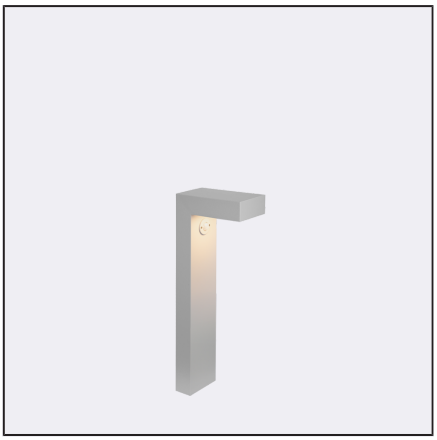

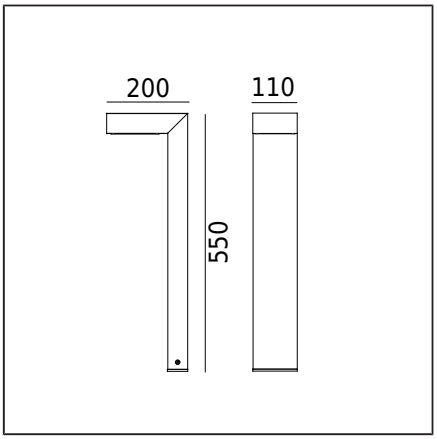

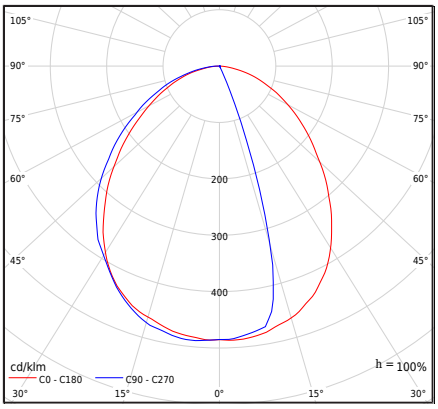

Type of luminaire

Type of luminaire	Post light fixture.
Photometric body	Diffuse downward-directed hemispherical light
Characteristics of the luminaire	Modern design luminaire. For lighting private areas and other architectural concepts.

General information

Materials	Powder painted aluminum cast. Lens - transparent polycarbonate with structure, UV stabilized. Silicone gasket. EPDM cable gland.
Mounting method	Fixture mounting: 4 holes ø8mm, spacing 18x50mm. According to the included installation instructions. Additional accessories must be purchased separately.
Terminal	Connection terminals: max 4x4mm², possibility to connect the fixture in loop max x2.5mm². Cable in round sheath with diameter: ø4...8mm; ø8...12mm or ø10...13.6mm.
Type of light source	AC integrated LED module, PIR motion detector Replaceable (LED only) light source by a professional.
Light control	Luminaire equipped with a PIR motion sensor, with a dusk switch and motion hold. Programmed for: maximum range of operation, lighting time 1 minute, twilight 10lux.
Luminaire weight net / gross	2,93kg / 3,58kg
Box dimensions [cm]	57cm x 23cm x 14cm
Luminaire dimensions [cm]	55cm x 20cm x 11cm

Technical data

LED module	Philips Fortimo DLM ES 1100/8xx G2 3K (Datasheet)
External control	ESYLUX PIR Motion Sensor MD-C 360I/6 mini (User manual)
Light source wattage	9,5W
Luminaire wattage	9,7W
Lamp luminous flux	1080lm
Luminaire luminous flux	585lm
Efficiency of the luminaire	60,3lm/W
ULOR	0%
Color temperature	3000K
Colour consistency (McAdam ellipse)	SDCM3
Colour rendering index CRI	80
L70TM-21 [wg LM-80]	>50 000h
Power Factor luminaire	PF 0,9
Ta Rated temperature	+25°C
Ambient operating temp. range	-20...+45°C

This product contains light source of energy efficiency class E / EPREL

Optionally, the fixture is also available:
- for LED color temperature 2700K [1/1]
- in another fixture color (according to the RAL color palette)
- with the possibility to program the motion sensor to different parameters

Terms of sale and other information to be agreed with the Norlys' Sales Department.

Inrush current	2,98A / 34,07µs
BUG rating	B0-U1-G0

Maximum number of luminaires of this type per MCB:

B 10A: 144, B 16A: 230, C 10A: 239, C 16A: 391

Accessories sold separately

1907ZX0009	Concreting anchor
3090GA0009	Mounting adapter
1909GA0010	Adapter for concrete foundation
3081XX0009	Mounting adapter
1908GA0009	Ground anchor

Spare parts

ZS PIR 0913360000	Repair kit.
ZS1336xx0009	Repair kit.

Norlys AS
P.B 1014 Hoff, 0218
Oslo
Hovfaret 4B, 0275
Oslo
Norway
+47 24 12 40 11
firmapost@norlys.no

TÜVRheinland CERTIFIED
Management System ISO 9001:2015 IATF 16949:2016
www.tuv.com ID 9108651873

PCC Cert CERTIFICATE ISO 14001

RoHS 2011/65/UE

Before starting installation, please read the instructions included with the fixture. Installation and service work should be carried out by a person with appropriate authorizations and qualifications, in accordance with applicable regulations. Due to the dynamic development of lighting technology, additional information is provided at the customer's request. Condensation that may occur in fixtures is a natural phenomenon and does not affect the quality of the fixture.

NORLYS ASKER 1336



Files to download

Photometric LDT files	Photometric IES files
Manual	BIM Revit
BIM ArchiCAD	

Indexes

Index	Color	RAL
1336AL	ALUMINUM	9006
1336BL	BLACK	9005
1336GR	GRAPHITE	7016

Other colors according to the "Colors Template" / RAL pattern book - available on request, subject to agreement with Norlys' Sales Department.

Norlys AS
P.B 1014 Hoff, 0218
Oslo
Hovfaret 4B, 0275
Oslo
Norway
+47 24 12 40 11
firmapost@norlys.no

TÜVRheinland CERTIFIED
Management System ISO 9001:2015 IATF 16949:2016
www.tuv.com ID 9108651873

PCC Cert CERTIFICATE ISO 14001

RoHS 2011/65/UE

Before starting installation, please read the instructions included with the fixture. Installation and service work should be carried out by a person with appropriate authorizations and qualifications, in accordance with applicable regulations. Due to the dynamic development of lighting technology, additional information is provided at the customer's request. Condensation that may occur in fixtures is a natural phenomenon and does not affect the quality of the fixture.