

NORLYS ASKER 1338

IP 65 | IK 05 | AC 220-240V 50-60Hz | LED | No Dim

Asker 1338XX0009
02.11.2026 v.09.16
www.norlys.no



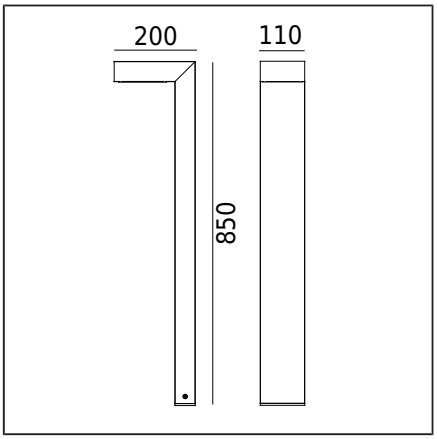

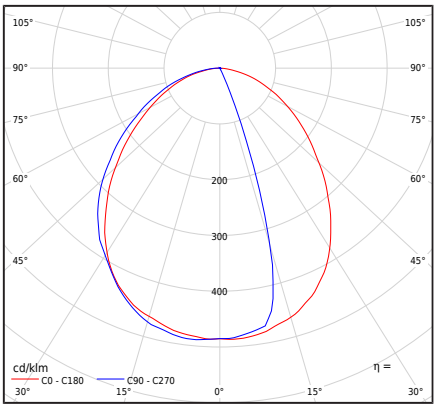

Type of luminaire

Type of luminaire	Post light fixture.
Photometric body	Diffuse downward-directed hemispherical light
Characteristics of the luminaire	A fixture with contemporary design. For illuminating gardens, private areas, and other architectural applications.

General information

Materials	Powder painted aluminum cast. Lens - transparent polycarbonate with structure, UV stabilized. Silicone gasket. EPDM cable gland.
Mounting method	Fixture mounting: 4 holes ø8mm, spacing 18x50mm. As per the included installation manual. Other accessories should be purchased separately.
Terminal	Connection terminals: max 4x4mm², possibility of connecting the fixture in a loop max 4x2.5mm². Round cable with a diameter of: ø4...8mm; ø8...12mm or ø10...13.6mm.
Type of light source	AC integrated LED module, PIR motion detector Replaceable (LED only) light source by a professional.
Light control	Luminaire equipped with a PIR motion sensor, with a dusk switch and motion hold. Programmed for: maximum range of operation, lighting time 1 minute, twilight 10lux.
Luminaire weight net / gross	4,11kg / 4,84kg
Box dimensions [cm]	88cm x 23cm x 13cm
Luminaire dimensions [cm]	85cm x 20cm x 11cm

Technical data

LED module	Philips Fortimo DLM ES 1100/8xx G2 3K (Datasheet)
External control	ESYLUX PIR Motion Sensor MD-C 360I/6 mini (User manual)
Light source wattage	9,5W
Luminaire wattage	9,7W
Lamp luminous flux	1080lm
Luminaire luminous flux	585lm
Efficiency of the luminaire	60,3lm/W
ULOR	0%
Color temperature	3000K
Colour consistency (McAdam ellipse)	SDCM3
Colour rendering index CRI	80
L70TM-21 [wg LM-80]	>50 000h
Power Factor luminaire	PF 0,9
Ta Rated temperature	+25°C
Ambient operating temp. range	-20...+45°C

This product contains light source of energy efficiency class E / EPREL

Optionally, the fixture is also available:
- in LED color temperature 2700K [1/1]
- in a different fixture color (according to the RAL color palette)
- possibility to program the motion sensor with different parameters

Sales terms and additional information, upon agreement with the Sales Department of Norlys.

Inrush current	2,98A / 34,07µs
BUG rating	B0-U1-G0

Accessories sold separately

1907ZX0009	Concreting anchor
3090GA0009	Mounting adapter
1909GA0010	Adapter for concrete foundation
3081XX0009	Mounting adapter
1908GA0009	Ground anchor

Spare parts

ZS PIR 0913380000	Repair kit.
ZS1338zx0009	Repair kit.

Norlys AS
P.B 1014 Hoff, 0218
Oslo
Hovfaret 4B, 0275
Oslo
Norway
+47 24 12 40 11
firmapost@norlys.no


TÜVRheinland CERTIFIED — Management System ISO 9001:2015 IATF 16949:2016 — www.tuv.com ID 9108651873

PCC Cert CERTIFICATE ISO 14001

RoHS 2011/65/UE

Before starting the installation, familiarize yourself with the instructions attached to the luminaire. Installation and service work should be conducted by a person with the appropriate authorizations and qualifications, in accordance with applicable regulations. Due to the dynamic development of lighting technology, we provide additional information at the client's request. Condensation that may occur in luminaires is a natural phenomenon and does not affect the deterioration of the quality of the luminaire.

NORLYS ASKER 1338



Files to download

Photometric LDT files	Photometric IES files
Manual	BIM Revit
BIM ArchiCAD	

Indexes

Index	Color	RAL
1338AL	ALUMINUM	9006
1338BL	BLACK	9005
1338GR	GRAPHITE	7016

Other colors according to the "Colors Template" / RAL pattern book - available on request, subject to agreement with Norlys' Sales Department.

Norlys AS
P.B 1014 Hoff, 0218
Oslo
Hovfaret 4B, 0275
Oslo
Norway
+47 24 12 40 11
firmapost@norlys.no

TÜVRheinland CERTIFIED
Management System ISO 9001:2015 IATF 16949:2016
www.tuv.com ID 9108651873

PCC Cert CERTIFICATE ISO 14001

RoHS 2011/65/UE

Before starting the installation, familiarize yourself with the instructions attached to the luminaire. Installation and service work should be conducted by a person with the appropriate authorizations and qualifications, in accordance with applicable regulations. Due to the dynamic development of lighting technology, we provide additional information at the client's request. Condensation that may occur in luminaires is a natural phenomenon and does not affect the deterioration of the quality of the luminaire.