
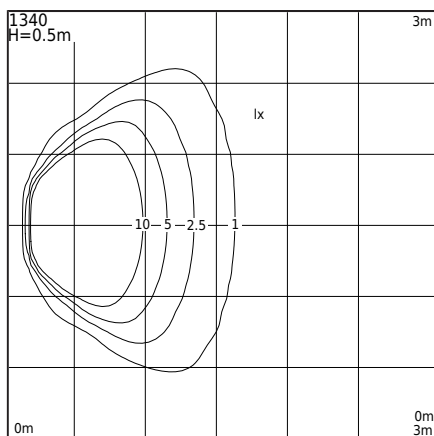
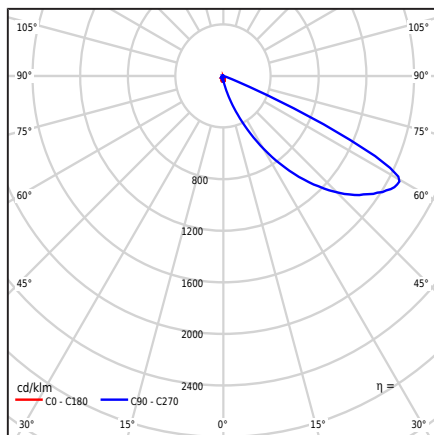
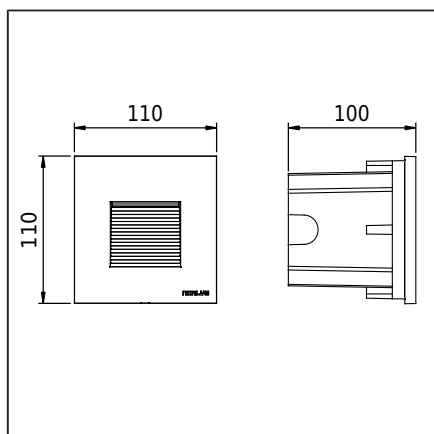


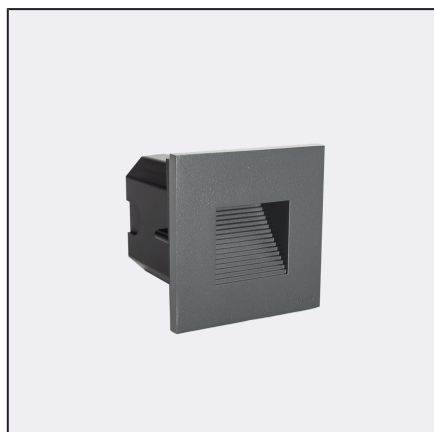

Type of luminaire

Type of luminaire	Recessed wall luminaire.
Photometric body	Diffuse downward-directed hemispherical light
Characteristics of the luminaire	The luminaire is adapted to illuminate stairs, steps, staircases, passageways, ceilings, and for the implementation of other architectural concepts

General information

Materials	Powder painted aluminum cast. Lens - safety glass, satin. Silicone gasket. EPDM cable gland.
Mounting method	Mounting the luminaire: embedded in the wall, hole 105x105x110, fixing in a layered wall, hole 82x82x82, The set includes a template for an easy mounting of the luminaire
Terminal	Connection terminals: max 3x2,5mm ² , Possibility to connect the luminaire in loops, max 3x1,5mm ² , Round insulated cable with a diameter of ø7 ... 10,5mm
Type of light source	LED module AC integrated Replaceable (LED only) light source by a professional.
Light control	Phase-dimming (TRIAC) TRAILING EDGE (TE) - LEADING EDGE (LE)
Luminaire weight net / gross	0,55kg / 0,65kg
Box dimensions [cm]	12cm x 12cm x 13cm
Luminaire dimensions [cm]	11cm x 11cm x 10cm

Technical data

LED module	Lumens EDC 38C 4W xxx 230V A101 3K (ø Datasheet)
External control	Phase dimmer Lumens LED AC (User manual)
Light source wattage	4W
Luminaire wattage	4W
Lamp luminous flux	439lm
Luminaire luminous flux	51lm
Efficiency of the luminaire	12,8lm/W
ULOR	0,29%
Color temperature	3000K
Colour consistency (McAdam ellipse)	SDCM3
Colour rendering index CRI	80
L70TM-21 [wg LM-80]	>59 000h
LED photobiological threat	RG0 or RG1
Power Factor luminaire	PF 0,98
Ta Rated temperature	+25°C
Ambient operating temp. range	-20...+45°C

This product contains light source of energy efficiency class **E** / **EPREL**

Inrush current	17mA / 60ms
BUG rating	B0-U1-G0

Spare parts

ZS1340zx0011	Service set.
--------------	--------------

Files to download

Photometric LDT files	Photometric IES files
Manual	BIM Revit
BIM ArchiCAD	



Indexes

Index	Color	RAL
1340AL	ALUMINUM	9006
1340CG	CEMENT GREY	7033
1340CB	COPPER BROWN	8004
1340CS	CORTEN STEEL	approx. 8011
1340GR	GRAPHITE	7016
1340GB	GREY BEIGE	7006

Other colors according to the "Colors Template" pattern book - available on request, subject to agreement with Norlys' Sales Department.