

NORLYS ASKER POLE 1363


AC 220-240V 50-60Hz | IP 65 | IK 10 | LED | DIM

Asker pole
1363XX0011
16.09.2026 v.11.15
www.norlys.no



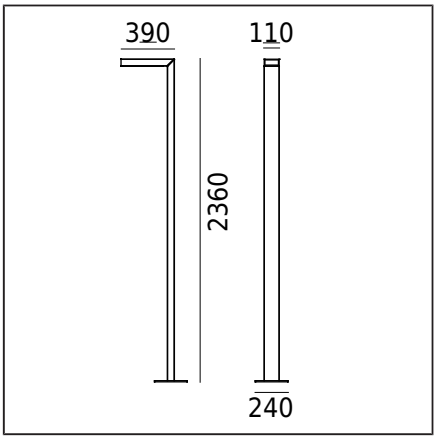

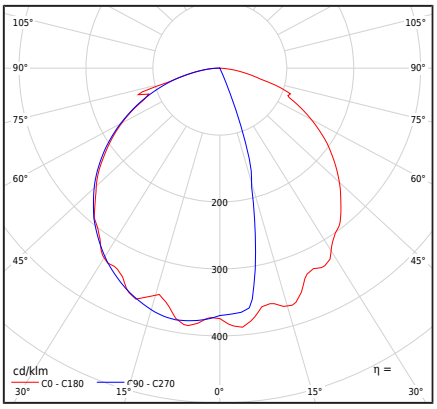

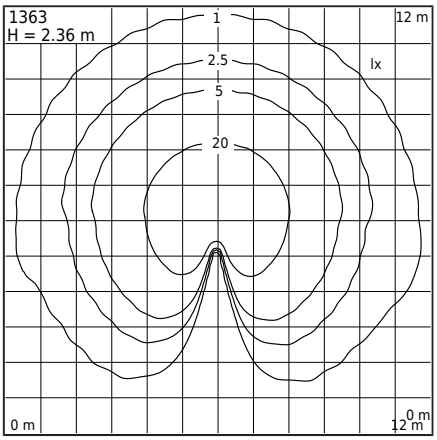

Type of luminaire

Type of luminaire	Pole luminaire (light construction).
Photometric body	Single-sided light: symmetrical, directed downward.
Characteristics of the luminaire	For lighting private areas and other architectural concepts

General information

Materials	Extruded aluminum profile, powder coated. Lens - transparent polycarbonate with structure, UV stabilized. Silicone gasket.
Mounting method	Mounting of the luminaire: 4 holes ø12mm, spacing 200x200mm Other accessories must be purchased separately
Terminal	Connection terminals: max 3x4mm² Possibility to connect the luminaire in loops of max 3x2,5mm² Round insulated cable with a maximum diameter of ø12,5mm
Type of light source	LED module, electronic power supply Replaceable (LED only) light source by a professional. Replaceable control gear by a professional.
Light control	Phase-dimming (TRIAC) TRAILING EDGE (TE) - LEADING EDGE (LE)
Luminaire weight net / gross	11kg / 17,05kg
Box dimensions [cm]	26cm x 240cm x 53cm
Luminaire dimensions [cm]	11cm x 236cm x 39cm
Side area of luminaire	0,258m²

Technical data

2 LED modules	Cree DK200305 V3 JB2835 3V 3K (Datasheet)
Driver	Yes
Light source wattage	10,6W
Luminaire wattage	12W
Lamp luminous flux	1988lm
Luminaire luminous flux	1128lm
Efficiency of the luminaire	94lm/W
ULOR	0%
Color temperature	3000K
Colour consistency (McAdam ellipse)	SDCM3
Colour rendering index CRI	80
L80TM-21 [wg LM-80]	>102 000h
L90 TM-21 [wg LM-80]	>52 600h
Power Factor luminaire	PF 0,95
THD factor	10%
Ta Rated temperature	+25°C
Ambient operating temp. range	-20...+45°C

This product contains light sources of energy efficiency class C / EPREL

Optionally, the luminaire is also available:
- In the safety class for KL II
- For the LED color 2700K [1/1]
- For a different value of the luminous flux
- For a different color of the fitting (according to the RAL color palette)

Terms of sale and other information, after contact with the Sales Department of Norlys

Inrush current	2A / 50µs
BUG rating	B1-U1-G0

Accessories sold separately

117GA0009	Ground anchor
116ZX0009	Concreting anchor

Spare parts

ZS1363zx0011	Service set.

Files to download

Photometric LDT files	Photometric IES files
Manual	BIM Revit
BIM ArchiCAD	

Norlys AS
P.B 1014 Hoff, 0218
Oslo
Hovfaret 4B, 0275
Oslo
Norway
+47 24 12 40 11
firmapost@norlys.no

TÜVRheinland CERTIFIED — Management System ISO 9001:2015 IATF 16949:2016 — www.tuv.com ID 9108651873

PCC Cert CERTIFICATE ISO 14001

RoHS 2011/65/UE

Before the installation, read the instructions attached to the luminaire. Installation and service work is carried out by a person with appropriate authorizations and qualifications, in accordance with applicable regulations. Due to the dynamic development of lighting technology, we provide additional information at the client's request. Condensation, which may occur in luminaires, is a natural phenomenon and does not deteriorate the quality of the luminaire

ASKER POLE 1363

Indexes

Index	Color	RAL
1363AL	ALUMINUM	9006
1363BL	BLACK	9005
1363GR	GRAPHITE	7016

Other colors according to the "Colors Template" pattern book - available on request, subject to agreement with Norlys' Sales Department.

Norlys AS
P.B 1014 Hoff, 0218
Oslo
Hovfaret 4B, 0275
Oslo
Norway
+47 24 12 40 11
firmapost@norlys.no

Before the installation, read the instructions attached to the luminaire. Installation and service work is carried out by a person with appropriate authorizations and qualifications, in accordance with applicable regulations. Due to the dynamic development of lighting technology, we provide additional information at the client's request. Condensation, which may occur in luminaires, is a natural phenomenon and does not deteriorate the quality of the luminaire