


NORLYS MANDAL 1373

AC 220-240V 50-60Hz | IP 44 | IK 08 | GU10 LED | DIM



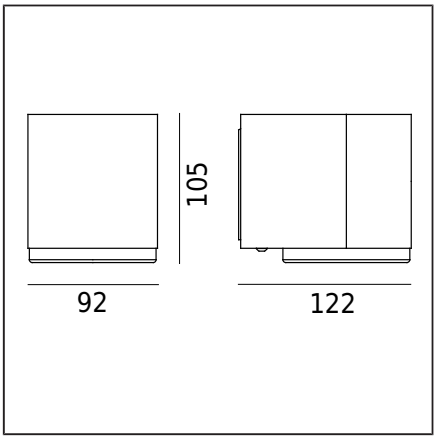

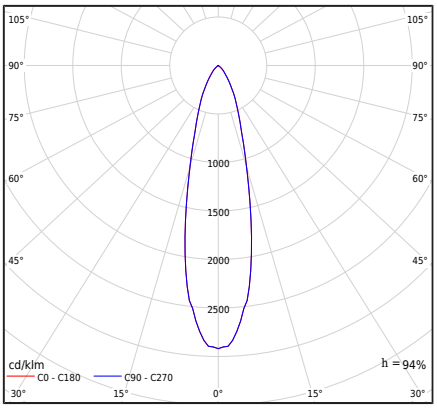

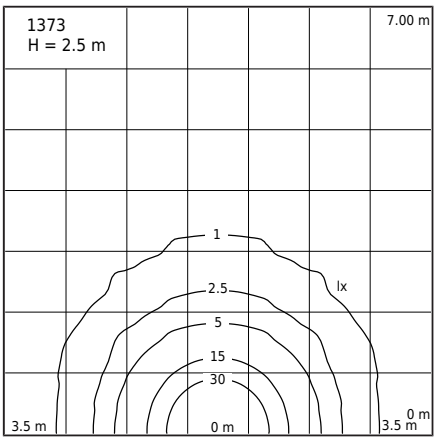

Type of luminaire

Type of luminaire	Wall light,
Photometric body	Single-sided light with 25D beam angle facing down
Characteristics of the luminaire	Wall-mounted luminaire with modern design. For lighting private areas and public spaces.

General information

Materials	Base - galvanized steel. Front - galvanized steel or powder coated galvanized steel. Lampshade - safety glass, transparent. Silicone gasket.
Mounting method	Fixing of the luminaire: 2 holes ø4,2mm, spacing 45mm.
Terminal	Connection terminals: max 3x2,5mm², possibility to connect luminaire in loop max 3x1,5mm². A round wire in the isolation with a diameter of ø7...10,5mm.
Type of light source	LED GU10 lamp, 25D Replaceable (LED only) light source by an end-user.
Light control	Phase-dimming (TRIAC) TRAILING EDGE (TE) - LEADING EDGE (LE)
Luminaire weight net / gross	0,89kg / 0,97kg
Box dimensions [cm]	13cm x 10cm x 12,5cm
Luminaire dimensions [cm]	12cm x 9cm x 10,5cm

Technical data

LED Lamp GU10	Philips MASTER LED ExpertColor 3.9-35W GU10 927 25D (Datasheet)
External control	Phase dimming LED GU10 E27 (User manual)
Light source wattage	3,9W
Luminaire wattage	3,9W
Lamp luminous flux	265lm
Luminaire luminous flux	250lm
Efficiency of the luminaire	64,1lm/W
ULOR	0%
Color temperature	2700K
Colour consistency (McAdam ellipse)	SDCM3
Colour rendering index CRI	97
L70TM-21 [wg LM-80]	>40 000h
Power Factor luminaire	PF 0,8
Ta Rated temperature	+25°C
Ambient operating temp. range	-20...+45°C
This product contains light source of energy efficiency class G / EPREL	
BUG rating	B0-U0-G0

Accessories sold separately

130XX0009	Corner bracket

Spare parts

46102507	LED Gu10 lamp

Files to download

Photometric LDT files	Photometric IES files
Manual	BIM ArchiCAD

Indexes

Index	Color	RAL
1373BL	BLACK	9005
1373GA	HOT-DIP GALVANIZING	-

Other colors according to the "Colors Template" pattern book - available on request, subject to agreement with Norlys' Sales Department.

Norlys AS
P.B 1014 Hoff, 0218
Oslo
Hovfaret 4B, 0275
Oslo
Norway
+47 24 12 40 11
firmapost@norlys.no

TÜVRheinland CERTIFIED — Management System ISO 9001:2015 IATF 16949:2016 — www.tuv.com ID 9108651873

PCC Cert CERTIFICATE ISO 14001

RoHS 2011/65/UE

Before commencing installation, please read the instruction manual included with the fixture. Due to the dynamic development of lighting technology, additional information is available at the customer's request. Information on recommended light sources is based on manufacturers' data. We do not guarantee the completeness and validity of the offer, therefore, we refer to the current technical information of light source manufacturers. Condensation, which may occur in fixtures, is a natural phenomenon and does not affect the quality of the fixture.