
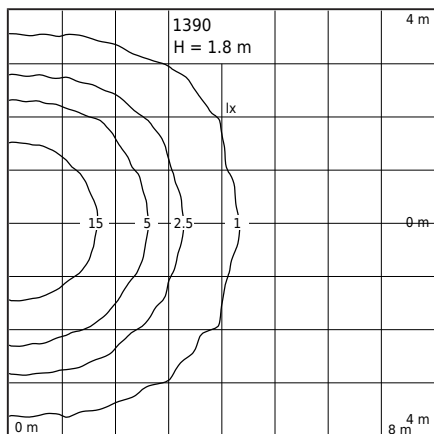
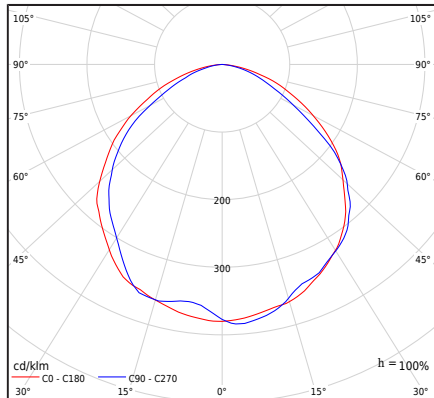


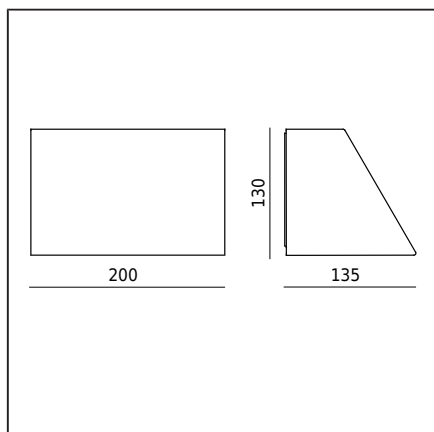

Type of luminaire

Type of luminaire	Wall light,
Photometric body	Diffuse downward-directed hemispherical light
Characteristics of the luminaire	Wall luminaire and electricity distributor 220 ... 240V. For lighting private areas and for any other applications.

General information

Materials	Base - galvanized steel. Front - galvanized steel or powder coated galvanized steel. Lens - transparent polycarbonate with structure, UV stabilized. Silicone gasket.
Mounting method	Fixing of the luminaire: 2 holes $\varnothing 4,2$ mm, spacing 122mm.
Terminal	Connection terminals: max. $3 \times 2,5$ mm ² . A round wire in the isolation with a diameter $\varnothing 7 \dots 10,5$ mm.
Type of light source	LED module, electronic power supply
Light control	Trailing edge (TE) dimming
Net / gross weight of luminaire	2,6kg / 2,6kg
Box dimensions [cm]	22,5cm x 15,5cm x 15cm

Technical data

Luminaire wattage	5,2W
Luminaire luminous flux	350lm
Efficiency of the luminaire	67,3lm/W
Color temperature	3000K
Colour consistency (McAdam ellipse)	SDCM3
Colour rendering index CRI	80
Rated life time L70/B50 at 25°C	>70 000h
Power Factor luminaire	PF 0,96
Ta Rated temperature	+25°C
Ambient temperature	Ta max=+65°C
Inrush current	1A/15,2μs
BUG rating	B0-U1-G0

Maximum number of luminaires of this type per MCB:

B 10A: 157, B 16A: 250, C 10A: 260, C 16A: 425

Spare parts

08139000	Gasket.
46999609	LED module.
46999746	Power supply.

Files to download

Photometric LDT files	Photometric IES files
Manual	

Indexes

Index	Color	RAL
1390BL	BLACK	9005
1390GA	HOT-DIP GALVANIZING	-