

NORLYS ALTA 1440


AC 220-240V 50-60Hz | IP 65 | IK 08 | E27

Alta 1440XX0010
16.09.2026 v.10.22
www.norlys.no



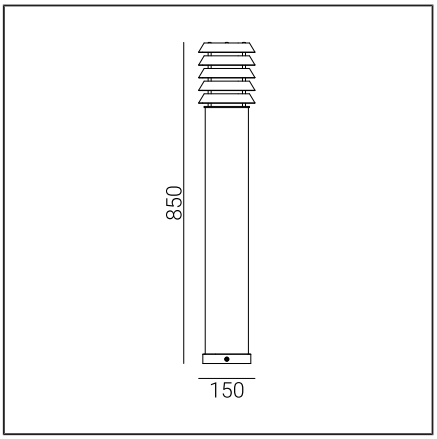

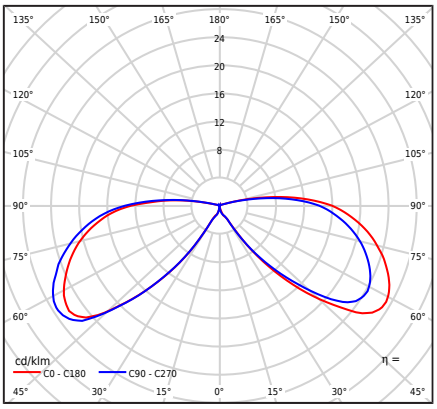

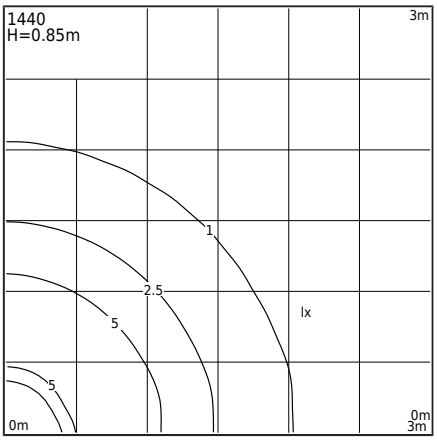

Type of luminaire

Type of luminaire	Post light fixture.
Photometric body	Top-shaded rotationally symmetrical light.
Characteristics of the luminaire	A bollard lamp with a stable and durable construction. Designed for illuminating private areas and public zones.

General information

Materials	Wood - scandinavian painted pine and hot-dip galvanized steel. Wood - scandinavian painted pine, hot-dip galvanized and powder painted steel. Lens - plastic PMMA in milky color. Silicone gasket.
Mounting method	Fixture mounting: 3 holes ø9mm on a ø65mm diameter at 120° intervals.
Terminal	Terminal connectors: max 3x2.5mm², possibility of looping the fixture max 3x1.5mm². Round sheath cable with a diameter max ø12.5mm.
Type of light source	Lamp E27 A55...A60 Replaceable light source by an end-user.
Luminaire weight net / gross	5,9kg / 7,3kg
Box dimensions [cm]	20,5cm x 20,5cm x 91cm
Luminaire dimensions [cm]	15cm x 15cm x 85cm

Technical data

Lamp E27	LED A55..60
Light source wattage	LED max 9W
Luminaire wattage	LED max 9W
ULOR	11%
Ta Rated temperature	+25°C
Ambient operating temp. range	-20...+45°C
Option to order the fixture with a Philips Master LEDbulb 806lm/8.5W/2700K (dimmable) LED lamp E27 type.	
BUG rating	B0-U1-G0

Accessories sold separately

3086GA0009	Mounting adapter
3080GA0009	Mounting adapter
205ZX0010	Concreting anchor
206GA0010	Ground anchor
206GA0S10	Adapter for concrete foundation

Spare parts

06291001	Lampshade - service kit
08288004	Gasket.

Files to download

Photometric LDT files	Photometric IES files
3D models and drawings	Manual
BIM ArchiCAD	

Indexes

Index	Color	RAL
1440BL	BLACK	9005
1440GA	HOT-DIP GALVANIZING	-

Other colors according to the "Colors Template" pattern book - available on request, subject to agreement with Norlys' Sales Department.

Norlys AS
P.B 1014 Hoff, 0218
Oslo
Hovfaret 4B, 0275
Oslo
Norway
+47 24 12 40 11
firmapost@norlys.no

TÜVRheinland CERTIFIED — Management System ISO 9001:2015 IATF 16949:2016 — www.tuv.com ID 9108651873

PCC cert CERTIFICATE ISO 14001

RoHS 2011/65/UE

Before starting the assembly, you should read the instructions attached to the fixture. Due to the dynamic development of lighting technology, we provide additional information upon customer request. Information on recommended light sources based on manufacturer data. We are not responsible for the completeness and validity of the offer, therefore we refer to the current technical information of light source manufacturers. Condensation that may occur in fixtures is a natural phenomenon and does not affect the deterioration of the fixture's quality.