

NORLYS ALTA 1443


AC 220-240V 50-60Hz | IP 65 | IK 08 | E27

Alta 1443XX0010
16.09.2026 v.10.19
www.norlys.no



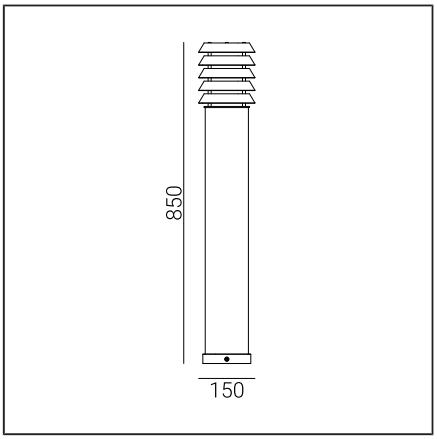

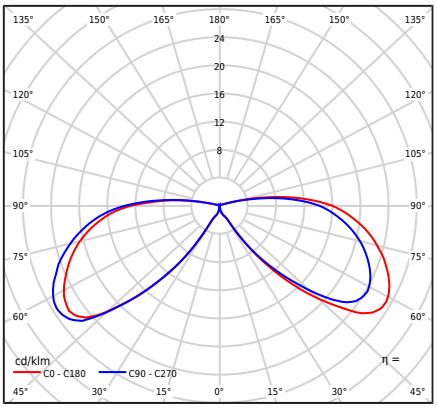

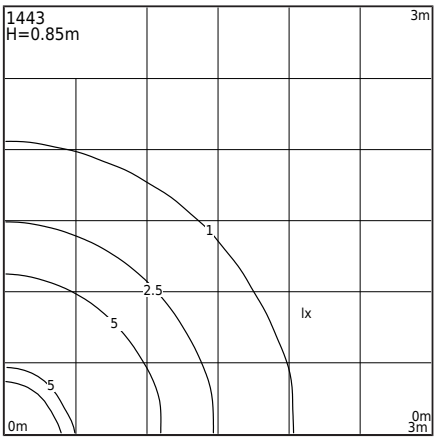

Type of luminaire

Type of luminaire	Post light fixture.
Photometric body	Top-shaded rotationally symmetrical light.
Characteristics of the luminaire	Bollard fixture with a stable and durable construction. For lighting private areas and public zones.

General information

Materials	Wood - scandinavian impregnated pine and hot-dip galvanized steel. Wood - scandinavian impregnated pine, hot-dip galvanized and powder painted steel. Lens - plastic PMMA in milky color. Silicone gasket.
Mounting method	Fixture mounting: 3 holes ø9mm, on a ø65mm diameter 120° apart.
Terminal	Connection terminals: max 3x2.5mm², possibility of connecting the fixture in a loop max 3x1.5mm². Cable in a round sheath with a maximum diameter of ø12.5mm.
Type of light source	Lamp E27 A55...A60 Replaceable light source by an end-user.
Luminaire weight net / gross	5,9kg / 7,3kg
Box dimensions [cm]	20,5cm x 20,5cm x 91cm
Luminaire dimensions [cm]	15cm x 15cm x 85cm

Technical data

Lamp E27	LED A55..60
Light source wattage	LED max 9W
Luminaire wattage	LED max 9W
ULOR	11%
Ta Rated temperature	+25°C
Ambient operating temp. range	-20...+45°C

Optional version, deadline, and terms of execution upon agreement with Norlys Sp. z o.o. Sales Department. Possibility to order a fixture with a Philips Master LEDbulb E27 type 806lm/8.5W/2700K (dimmable) LED lamp.

BUG rating	B0-U1-G0

Accessories sold separately

3086GA0009	Mounting adapter
3080GA0009	Mounting adapter
205ZX0010	Concreting anchor
206GA0010	Ground anchor
206GA0S10	Adapter for concrete foundation

Spare parts

06291001	Lampshade - service kit
08288004	Gasket.

Files to download

Photometric LDT files	Photometric IES files
3D models and drawings	Manual
BIM ArchiCAD	

Indexes

Index	Color	RAL
1443BL	BLACK	9005
1443GA	HOT-DIP GALVANIZING	-

Other colors according to the "Colors Template" pattern book - available on request, subject to agreement with Norlys' Sales Department.

Norlys AS
P.B 1014 Hoff, 0218
Oslo
Hovfaret 4B, 0275
Oslo
Norway
+47 24 12 40 11
firmapost@norlys.no

TÜVRheinland CERTIFIED — Management System ISO 9001:2015 IATF 16949:2016 — www.tuv.com ID 9108651873

PCC cert CERTIFICATE ISO 14001

RoHS 2011/65/UE

Please read the manual before installing. Due to the dynamic development of lighting technology, additional information is available upon request. LED module must be replaced by a qualified person in accordance with applicable regulations. Condensation, which can occur in luminaires, is a natural phenomenon and does not impair the quality of the luminaire.