

NORLYS ALTA 1453


AC 220-240V 50-60Hz | IP 65 | IK 08 | E27

Alta 1453XX0010
16.09.2026 v.10.9
www.norlys.no



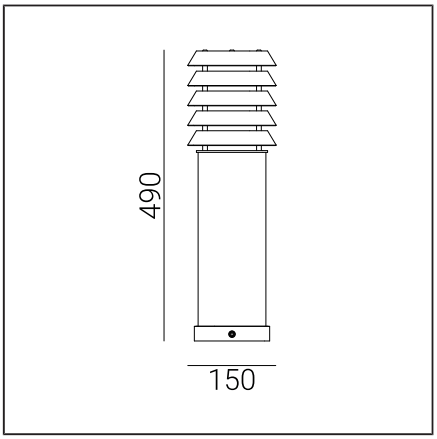

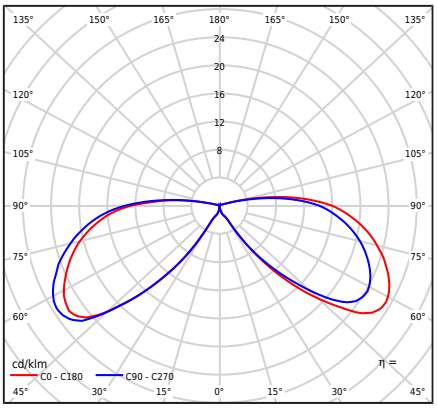

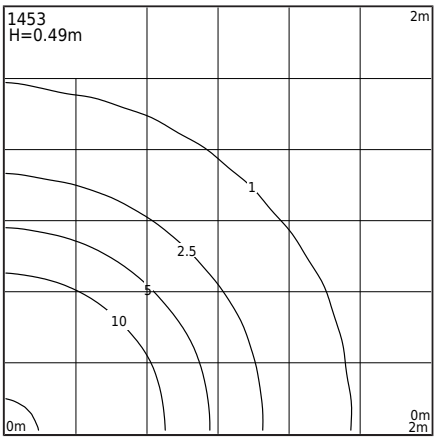

Type of luminaire

Type of luminaire	Post light fixture.
Photometric body	Top-shaded rotationally symmetrical light.
Characteristics of the luminaire	Bollard luminaire of stable and durable construction. For lighting private areas and public spaces.

General information

Materials	Wood - scandinavian impregnated pine and hot-dip galvanized steel. Wood - scandinavian impregnated pine, hot-dip galvanized and powder painted steel. Lens - plastic PMMA in milky color. Silicone gasket.
Mounting method	Fixing of the luminaire: 3 holes ø9mm with a diameter of ø65mm every 120°.
Terminal	Connection terminals: max 3x2,5mm², possibility to connect luminaire in loop max 3x1,5mm². A round wire in the isolation with a diameter of max ø12,5mm.
Type of light source	Lamp E27 A55...A60 Replaceable light source by an end-user.
Luminaire weight net / gross	4,65kg / 5,7kg
Box dimensions [cm]	21cm x 21,5cm x 57cm
Luminaire dimensions [cm]	15cm x 15cm x 49cm

Technical data

Lamp E27	LED A55..60
Light source wattage	LED max 9W
Luminaire wattage	LED max 9W
ULOR	11%
Ta Rated temperature	+25°C
Ambient operating temp. range	-20...+45°C
Possibility to order luminaire with LED E27 lamp Philips Master LEDbulb 806lm / 8,5W / 2700K (dimmable).	
BUG rating	B0-U1-G0

Accessories sold separately

3086GA0009	Mounting adapter
3080GA0009	Mounting adapter
205ZX0010	Concreting anchor
206GA0010	Ground anchor
206GA0S10	Adapter for concrete foundation

Spare parts

06291001	Lampshade - service kit
08288004	Gasket.
46999021	LED E27 lamp

Files to download

Photometric LDT files	Photometric IES files
3D models and drawings	Manual
BIM ArchiCAD	

Indexes

Index	Color	RAL
1453BL	BLACK	9005
1453GA	HOT-DIP GALVANIZING	-

Other colors according to the "Colors Template" pattern book - available on request, subject to agreement with Norlys' Sales Department.

Norlys AS
P.B 1014 Hoff, 0218
Oslo
Hovfaret 4B, 0275
Oslo
Norway
+47 24 12 40 11
firmapost@norlys.no

TÜVRheinland CERTIFIED — Management System ISO 9001:2015 IATF 16949:2016 — www.tuv.com ID 9108651873

PCC cert CERTIFICATE ISO 14001

RoHS 2011/65/UE

Please read the manual before installing. Due to the dynamic development of lighting technology, additional information is available upon request. LED module must be replaced by a qualified person in accordance with applicable regulations. Condensation, which can occur in luminaires, is a natural phenomenon and does not impair the quality of the luminaire.