

NORLYS ALTA 1457


AC 220-240V 50-60Hz | IP 65 | IK 08 | LED | DALI

Alta 1457XX0009
05.11.2026 v.09.12
www.norlys.no



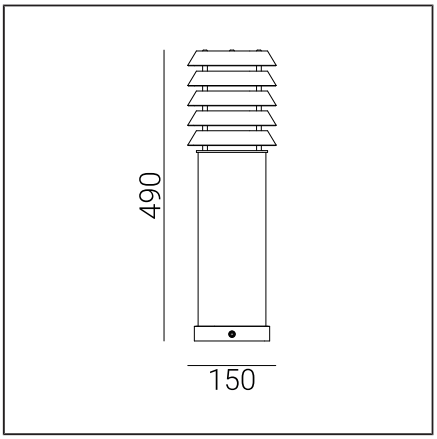

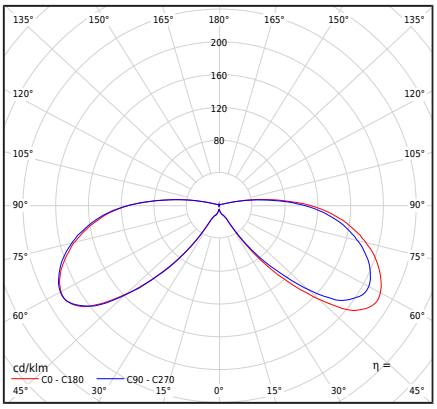

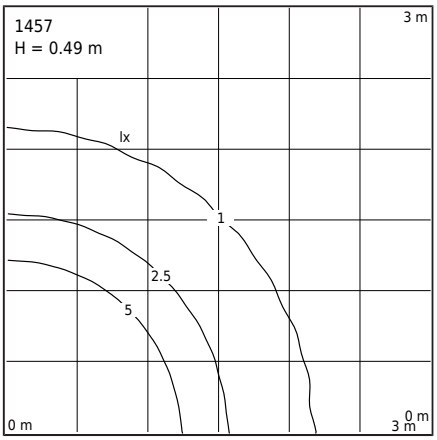

Type of luminaire

Type of luminaire	Post light fixture.
Photometric body	Top-shaded rotationally symmetrical light.
Characteristics of the luminaire	A bollard luminaire with a stable and durable structure For lighting private areas and other architectural concepts

General information

Materials	Hot-dip galvanized steel. Hot-dip galvanized and powder-coated steel. Lens - plastic PMMA in milky color. Silicone gasket.
Mounting method	Fixture mounting: 3 holes ø9mm on a diameter of ø65mm every 120°. According to the included installation manual. Other accessories must be purchased separately.
Terminal	Connection terminals: max 5x4mm², possibility to connect the fixture in a loop max 5x2.5mm². Cable in a round casing with a diameter max ø12.5mm.
Type of light source	LED module, electronic power supply Replaceable (LED only) light source by a professional. Replaceable control gear by a professional.
Box dimensions [cm]	21cm x 21cm x 57cm

Technical data

LED module	Philips Fortimo SLM C 1203 L09 1619 G7 4K (Datasheet)
Driver	Yes
Driver durability	100000h
Light source wattage	8,5W
Luminaire wattage	10W
Lamp luminous flux	1371lm
Luminaire luminous flux	173lm
Efficiency of the luminaire	17,3lm/W
ULOR	10%
Color temperature	4000K
Colour consistency (McAdam ellipse)	SDCM3
Flicker of light (Pst LM)	≤1
Strobe effect (SVM)	≤0.4
Colour rendering index CRI	80
L70TM-21 [wg LM-80]	>50 000h
Power Factor luminaire	PF 0,95
THD factor	<10%
Ta Rated temperature	+25°C
Ambient operating temp. range	-20...+45°C

This product contains light source of energy efficiency class D / EPREL

Optionally, the luminaire is also available:
- In the safety class for KL I
- For the LED color 2700K [1/1]
- For a different value of the luminous flux
- Version with surge protection device (SPD)
- For a different color of the fitting (according to the RAL color palette)
- For a different height of the luminaire

Terms of sale and other information, after contact with the Sales Department of Norlys

Inrush current	20A / 200µs

Accessories sold separately

3086GA0009	Mounting adapter
3080GA0009	Mounting adapter
205ZX0010	Concreting anchor
206GA0010	Ground anchor
206GA0S10	Adapter for concrete foundation

Spare parts

ZS1457zx0009	Repair kit.

Norlys AS
P.B 1014 Hoff, 0218
Oslo
Hovfaret 4B, 0275
Oslo
Norway
+47 24 12 40 11
firmapost@norlys.no

TÜVRheinland CERTIFIED — Management System ISO 9001:2015 IATF 16949:2016 — www.tuv.com ID 9108651873

PCC Cert CERTIFICATE ISO 14001

RoHS 2011/65/UE

Before the installation, read the instructions attached to the luminaire. Due to the dynamic development of lighting technology, we provide additional information at the client's request. Condensation, which may occur in luminaires, is a natural phenomenon and does not deteriorate the quality of the luminaire

NORLYS ALTA 1457

Files to download

Photometric LDT files	Photometric IES files
BIM ArchiCAD	

Indexes

Index	Color	RAL
1457BL	BLACK	9005
1457GA	HOT-DIP GALVANIZING	-

Other colors according to the "Colors Template" / RAL pattern book - available on request, subject to agreement with Norlys' Sales Department.

Norlys AS
P.B 1014 Hoff, 0218
Oslo
Hovfaret 4B, 0275
Oslo
Norway
+47 24 12 40 11
firmapost@norlys.no

Before the installation, read the instructions attached to the luminaire. Due to the dynamic development of lighting technology, we provide additional information at the client's request. Condensation, which may occur in luminaires, is a natural phenomenon and does not deteriorate the quality of the luminaire