
CONNECTION BOX 146

AC 220-240V 50-60Hz | IP 68(1m)

Connection box
146ZX0009
16.09.2026 v.09.4
www.norlys.no

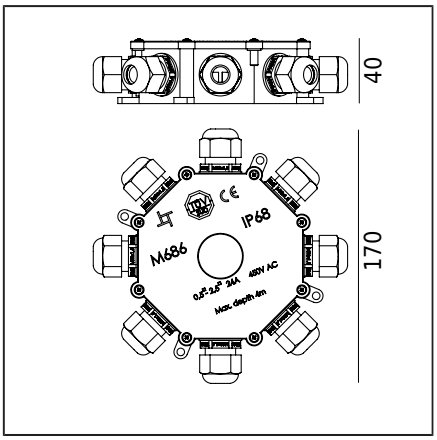

Type of accesory

Type of accessory	Connection box IP68 8-input
Characteristics of the accessory	Junction / distribution box for connecting fixtures.

General information

Materials	Synthetic material Silicone gasket. Nylon6 cable gland.
Mounting method	According to the attached product assembly instructions.
Terminal	Certified terminal connectors must be used in the junction box, depending on the quantity and cross-section of the wires used. Cable in a round sheath with a diameter of: ø4...8mm, ø8...12mm, or ø10...14mm.
Type of accesory	Junction box

Luminaires sold separately

1550 Rena	1551 Rena	1555 Rena	1631 Rena
1633 Rena	1750 Rena	1751 Rena	1752 Rena
1753 Rena	1754 Rena	1755 Rena	1756 Rena
1757 Rena	1760 Rena	1761 Rena	1762 Rena
1763 Rena	1764 Rena	1765 Rena	1766 Rena
1767 Rena	1770 Rena	1771 Rena	1772 Rena
1773 Rena	1774 Rena	1775 Rena	1780 Rena
1781 Rena	1782 Rena	1783 Rena	1784 Rena
1785 Rena	1786 Rena	1787 Rena	2070 Rena
2071 Rena	2072 Rena	2073 Rena	2074 Rena
2075 Rena	2076 Rena	2077 Rena	

Files to download

Manual

Indexes

Index	Color	RAL
146ZX		-

Other colors according to the "Colors Template" pattern book - available on request, subject to agreement with Norlys' Sales Department.

Norlys AS
P.B 1014 Hoff, 0218
Oslo
Hovfaret 4B, 0275
Oslo
Norway
+47 24 12 40 11
firmapost@norlys.no

TÜVRheinland CERTIFIED
Management System ISO 9001:2015 IATF 16949:2016
www.tuv.com ID 9108651873
PCC Cert CERTIFICATE ISO 14001
RoHS 2011/65/UE