

NORLYS ALTA 1475


AC 220-240V 50-60Hz | IP 65 | IK 08 | E27 LED | DIM

Alta 1475XX0012
16.09.2026 v.12.20
www.norlys.no



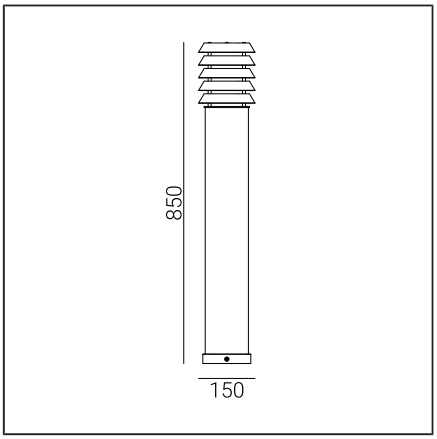

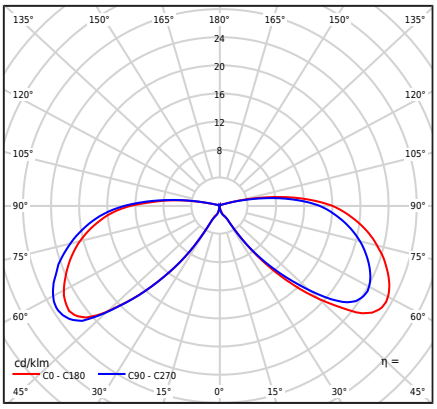

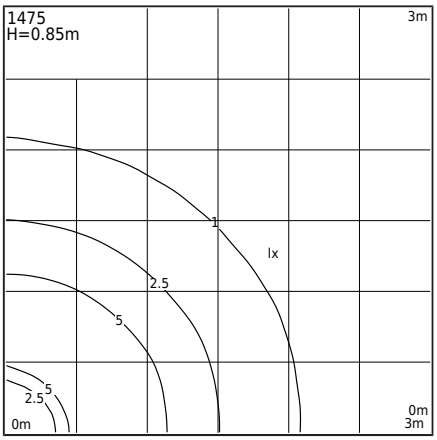

Type of luminaire

Type of luminaire	Post light fixture.
Photometric body	Top-shaded rotationally symmetrical light.
Characteristics of the luminaire	Bollard luminaire of stable and durable construction. For lighting private areas and public spaces.

General information

Materials	Hot-dip galvanized steel. Lens - plastic PMMA in milky color. Silicone gasket.
Mounting method	Fixing of the luminaire: 3 holes ø9mm with a diameter of ø65mm every 120°.
Terminal	Connection terminals: max 3x4mm², possibility to connect luminaire in loop max 3x2,5mm². A round wire in the isolation with a diameter of max ø12,5mm.
Type of light source	LED Lamp E27 A55...A60 Replaceable (LED only) light source by an end-user.
Light control	Phase-dimming (TRIAC) TRAILING EDGE (TE) - LEADING EDGE (LE)
Luminaire weight net / gross	9,05kg / 10,5kg
Box dimensions [cm]	20,5cm x 20,5cm x 91cm
Luminaire dimensions [cm]	15cm x 15cm x 85cm

Technical data

LED Lamp E27	Philips MAS LEDBulb DT5.9-60W E27 927 A60 FR G (Datasheet)
External control	Phase dimming LED GU10 E27 (User manual)
Light source wattage	5,9W
Luminaire wattage	5,9W
Lamp luminous flux	806lm
Luminaire luminous flux	100lm
Efficiency of the luminaire	16,9lm/W
ULOR	10%
Color temperature	2700K
Colour consistency (McAdam ellipse)	SDCM6
Colour rendering index CRI	80
L70TM-21 [wg LM-80]	>25 000h
Power Factor luminaire	PF 0,70
Ta Rated temperature	+25°C
Ambient operating temp. range	-20...+45°C

This product contains light source of energy efficiency class D / EPREL

Accessories sold separately

3086GA0009	Mounting adapter
3080GA0009	Mounting adapter
205ZX0010	Concreting anchor
206GA0010	Ground anchor
206GA0S10	Adapter for concrete foundation

Spare parts

06291001	Lampshade - service kit
08288004	Gasket.
46999021	LED E27 lamp

Files to download

Photometric LDT files	Photometric IES files
Manual	BIM ArchiCAD

Indexes

Index	Color	RAL
1475BL	BLACK	9005
1475GA	HOT-DIP GALVANIZING	-

Other colors according to the "Colors Template" pattern book - available on request, subject to agreement with Norlys' Sales Department.

Please read the manual before installing. Due to the dynamic development of lighting technology, additional information is available upon request. LED module must be replaced by a qualified person in accordance with applicable regulations. Condensation, which can occur in luminaires, is a natural phenomenon and does not impair the quality of the luminaire.

Norlys AS
P.B 1014 Hoff, 0218
Oslo
Hovfaret 4B, 0275
Oslo
Norway
+47 24 12 40 11
firmapost@norlys.no

TÜVRheinland CERTIFIED
Management System ISO 9001:2015 IATF 16949:2016
www.tuv.com ID 9108651873
PCC Cert CERTIFICATE ISO 14001
RoHS 2011/65/UE