

NORLYS ALTA 1477


IP 65 | IK 08 | E27 LED | DIM

Alta 1477XX0012
29.10.2026 v.12.20
www.norlys.no



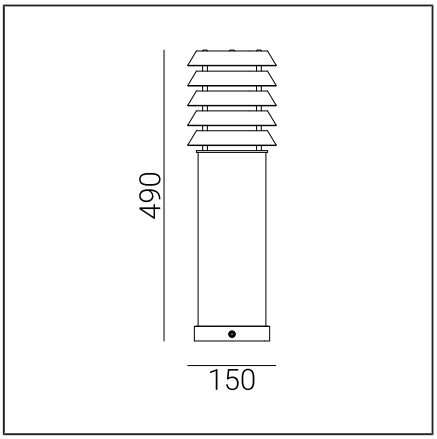

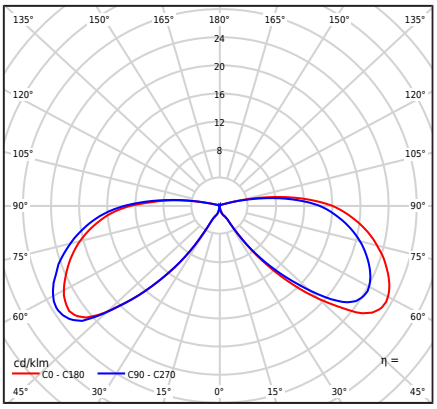

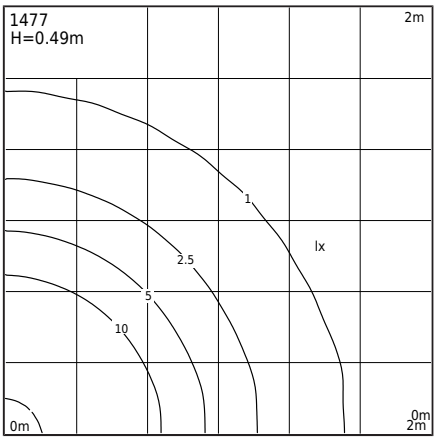

Type of luminaire

Type of luminaire	Post light fixture.
Photometric body	Top-shaded rotationally symmetrical light.
Characteristics of the luminaire	Bollard luminaire with a stable and durable structure. For lighting private areas and other architectural concepts.

General information

Materials	Hot-dip galvanized steel. Lens - plastic PMMA in milky color. Silicone gasket.
Mounting method	Fixture mounting: 3 holes ø9mm, on ø65mm diameter at 120° intervals.
Terminal	Connection terminals: max 3x2.5mm², capability to loop-in the fixture max 3x2.5mm². Round cable with a maximum diameter of ø12.5mm.
Type of light source	LED Lamp E27 A55...A60 Replaceable (LED only) light source by an end-user.
Light control	Phase-dimming (TRIAC) TRAILING EDGE (TE) - LEADING EDGE (LE)
Luminaire weight net / gross	6,7kg / 6,7kg
Box dimensions [cm]	21cm x 21,5cm x 57cm
Luminaire dimensions [cm]	15cm x 15cm x 49cm

Technical data

LED Lamp E27	Philips MAS LEDBulb DT5.9-60W E27 927 A60 FR G (Datasheet)
External control	Phase dimming LED GU10 E27 (User manual)
Light source wattage	5,9W
Luminaire wattage	5,9W
Lamp luminous flux	806lm
Luminaire luminous flux	100lm
Efficiency of the luminaire	16,9lm/W
ULOR	10%
Color temperature	2700K
Colour consistency (McAdam ellipse)	SDCM6
Colour rendering index CRI	80
L70TM-21 [wg LM-80]	>25 000h
Power Factor luminaire	PF 0,70
Ta Rated temperature	+25°C
Ambient operating temp. range	-20...+45°C
This product contains light source of energy efficiency class D / EPREL	
BUG rating	B0-U1-G0

Accessories sold separately

3086GA0009	Mounting adapter
3080GA0009	Mounting adapter
205ZX0010	Concreting anchor
206GA0010	Ground anchor
206GA0S10	Adapter for concrete foundation

Spare parts

06291001	Lampshade - service kit
08288004	Gasket.
46999021	LED E27 lamp

Files to download

Photometric LDT files	Photometric IES files
Manual	BIM ArchiCAD

Norlys AS
P.B 1014 Hoff, 0218
Oslo
Hovfaret 4B, 0275
Oslo
Norway
+47 24 12 40 11
firmapost@norlys.no

TÜVRheinland CERTIFIED — Management System ISO 9001:2015 IATF 16949:2016 — www.tuv.com ID 9108651873

PCC cert CERTIFICATE ISO 14001

RoHS 2011/65/UE

Please read the manual before installing. Due to the dynamic development of lighting technology, additional information is available upon request. LED module must be replaced by a qualified person in accordance with applicable regulations. Condensation, which can occur in luminaires, is a natural phenomenon and does not impair the quality of the luminaire.

Indexes

Index	Color	RAL
1477BL	BLACK	9005
1477GA	HOT-DIP GALVANIZING	-

Other colors according to the "Colors Template" / RAL pattern book - available on request, subject to agreement with Norlys' Sales Department.

Norlys AS
P.B 1014 Hoff, 0218
Oslo
Hovfaret 4B, 0275
Oslo
Norway
+47 24 12 40 11
firmapost@norlys.no

Please read the manual before installing. Due to the dynamic development of lighting technology, additional information is available upon request. LED module must be replaced by a qualified person in accordance with
applicable regulations. Condensation, which can occur in luminaires, is a natural phenomenon and does not
impair the quality of the luminaire.