

NORLYS ALTA 1479


AC 220-240V 50-60Hz | IP 65 | IK 08 | LED | DIM

Alta 1479XX0013
14.10.2026 v.13.23
www.norlys.no



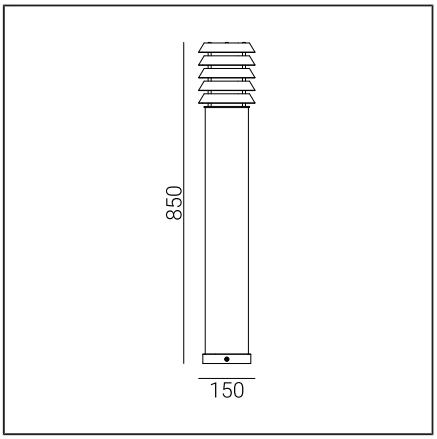

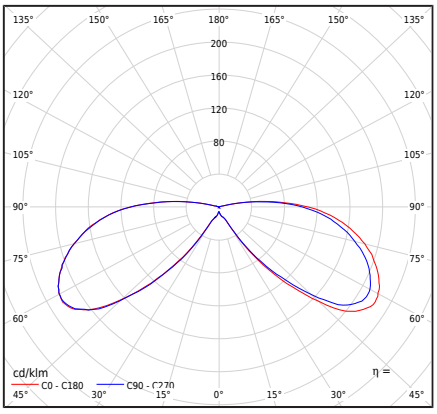

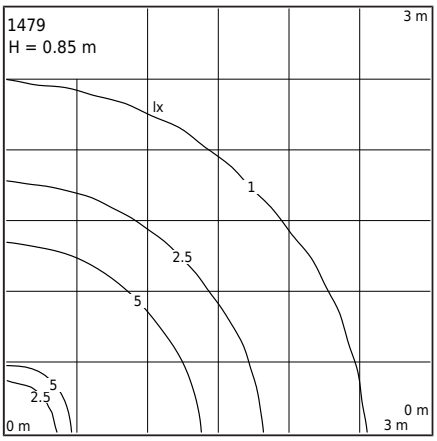

Type of luminaire

Type of luminaire	Post light fixture.
Photometric body	Top-shaded rotationally symmetrical light.
Characteristics of the luminaire	A bollard luminaire with a stable and durable construction. Used for lighting private areas and other architectural concepts.

General information

Materials	Hot-dip galvanized steel. Hot-dip galvanized and powder-coated steel. Lens - plastic PMMA in milky color. Silicone gasket.
Mounting method	Luminaire mounting: 3 holes ø9mm, on diameter ø65mm every 120°. According to the attached installation instructions. Other accessories should be purchased separately.
Terminal	Connection terminals: max 2x4mm², possibility of looping the fixture max 2x2.5mm². Cable in a round sheath with a maximum diameter of ø12.5mm.
Type of light source	LED module, electronic power supply Replaceable (LED only) light source by a professional. Replaceable control gear by a professional.
Light control	Phase-dimming (TRIAC) TRAILING EDGE (TE) - LEADING EDGE (LE)
Luminaire weight net / gross	9,3kg / 10,7kg
Box dimensions [cm]	20,5cm x 20,5cm x 91cm

Technical data

LED module	Philips Fortimo SLM C 1203 L09 1619 G7 3K (Datasheet)
Driver	Yes
Driver durability	50000h
External control	Dim. TRIAC (KGP) (User manual)
Light source wattage	6,7W
Luminaire wattage	8,5W
Lamp luminous flux	1059lm
Luminaire luminous flux	146lm
Efficiency of the luminaire	17,2lm/W
ULOR	10%
Color temperature	3000K
Colour consistency (McAdam ellipse)	SDCM3
Colour rendering index CRI	80
L80B20 [wg LM-80]	>50 000h
L90B10 [wg LM-80]	>38 000h
Power Factor luminaire	PF 0,90
THD factor	20%
Ta Rated temperature	+25°C
Ambient operating temp. range	-20...+45°C

This product contains light source of energy efficiency class D / EPREL

Optionally, the luminaire is also available:
- in a safety version for Class I
- with a 2700K LED color temperature [1/1]
- for a different light flux value
- in a version with a surge protection device (SPD)
- in a different luminaire color (according to the RAL color palette)
- for a different luminaire height

Terms of sale and other information, upon agreement with the Norlys Sales Department.

Inrush current	8A / 10µs
BUG rating	B0-U2-G1

Accessories sold separately

3086GA0009	Mounting adapter
3080GA0009	Mounting adapter
205ZX0010	Concreting anchor
206GA0010	Ground anchor
206GA0S10	Adapter for concrete foundation

Norlys AS
P.B 1014 Hoff, 0218
Oslo
Hovfaret 4B, 0275
Oslo
Norway
+47 24 12 40 11
firmapost@norlys.no

TÜVRheinland CERTIFIED — Management System ISO 9001:2015 IATF 16949:2016 — www.tuv.com ID 9108651873

PCC Cert CERTIFICATE ISO 14001

RoHS 2011/65/UE

Before starting the installation, make sure to read the instruction manual included with the fixture. The installation and maintenance work should be carried out by a qualified person with the appropriate authorizations, in accordance with the applicable regulations. Due to the dynamic development of lighting technology, additional information is provided upon customer request. Condensation that may occur in the fixtures is a natural phenomenon and does not affect the quality of the fixture.

Spare parts

ZS1479zx0013	Repair kit.

Files to download

Photometric LDT files	Photometric IES files
Manual	BIM ArchiCAD

Indexes

Index	Color	RAL
1479BL	BLACK	9005
1479GA	HOT-DIP GALVANIZING	-

Other colors according to the "Colors Template" / RAL pattern book - available on request, subject to agreement with Norlys' Sales Department.

Norlys AS
P.B 1014 Hoff, 0218
Oslo
Hovfaret 4B, 0275
Oslo
Norway
+47 24 12 40 11
firmapost@norlys.no

Management System ISO 9001:2015 IATF 16949:2016
www.tuv.com ID 9108651873

CERTIFICATE ISO 14001

RoHS 2011/65/UE

Before starting the installation, make sure to read the instruction manual included with the fixture. The installation and maintenance work should be carried out by a qualified person with the appropriate authorizations, in accordance with the applicable regulations. Due to the dynamic development of lighting technology, additional information is provided upon customer request. Condensation that may occur in the fixtures is a natural phenomenon and does not affect the quality of the fixture.