


NORLYS HALMSTAD 1489


IP 65 | IK 10 | AC 220-240V 50-60Hz | LED | DIM

Halmstad
1489XX0013
14.10.2026 v.13.14
www.norlys.no

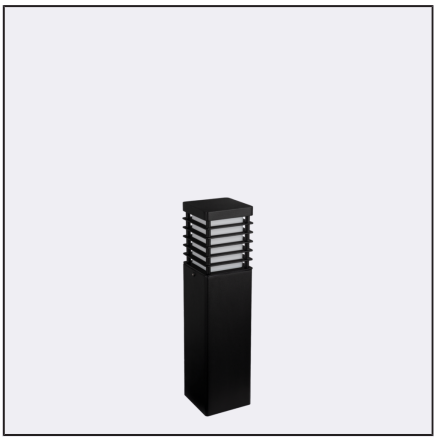

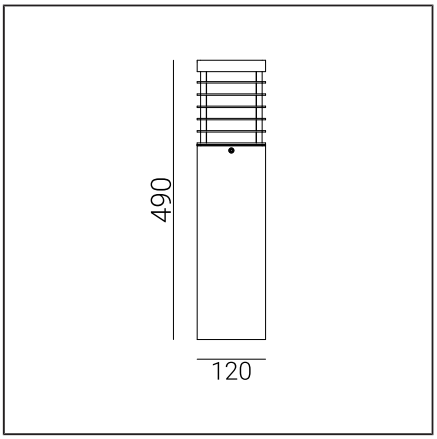

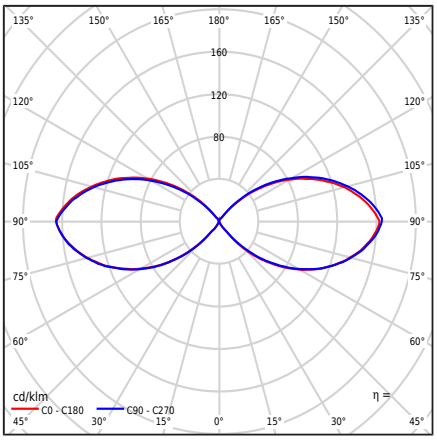

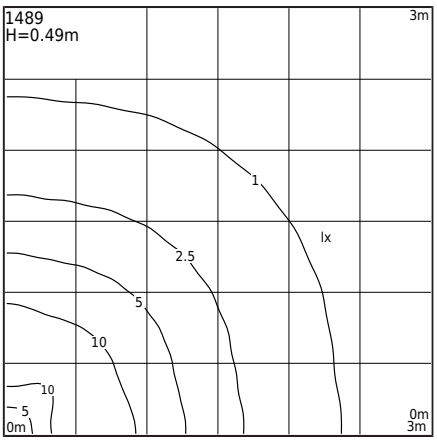

Type of luminaire

Type of luminaire	Post light fixture.
Photometric body	Uncovered light, partly covered from the top.
Characteristics of the luminaire	A bollard luminaire with a stable and durable structure. For lighting private areas and other architectural concepts

General information

Materials	Hot-dip galvanized steel. Hot-dip galvanized and powder-coated steel. Lens - plastic PMMA in milky color. Silicone gasket.
Mounting method	Mounting of the luminaire: 3 holes ø9mm, on the diameter of ø65mm every 120° Other accessories must be purchased separately
Terminal	Connection terminals: max 2x4mm² Possibility to connect the luminaire in loops max 2x2,5mm² Round insulated cable with a maximum diameter of ø12,5mm
Type of light source	LED module, electronic power supply Replaceable (LED only) light source by a professional. Replaceable control gear by a professional.
Light control	Phase-dimming (TRIAC) TRAILING EDGE (TE) - LEADING EDGE (LE)
Luminaire weight net / gross	8,2kg / 8,78kg
Box dimensions [cm]	15,5cm x 15,5cm x 55cm

Technical data

LED module	Philips Fortimo SLM C 1203 L09 1619 G7 3K (Datasheet)
Driver	Yes
Driver durability	50000h
External control	Dim. TRIAC (KGP) (User manual)
Light source wattage	6,7W
Luminaire wattage	8,5W
Lamp luminous flux	1059lm
Luminaire luminous flux	292lm
Efficiency of the luminaire	34,4lm/W
ULOR	47%
Color temperature	3000K
Colour consistency (McAdam ellipse)	SDCM3
Colour rendering index CRI	80
L80B20 [wg LM-80]	>50 000h
L90B10 [wg LM-80]	>38 000h
Power Factor luminaire	PF 0,90
THD factor	20%
Ta Rated temperature	+25°C
Ambient operating temp. range	-20...+45°C

This product contains light source of energy efficiency class D / EPREL

Optionally, the luminaire is also available:
- In the safety class for KL I
- For the LED color 2700K [1/1]
- For a different value of the luminous flux
- Version with surge protection device (SPD)
- For a different color of the fitting (according to the RAL color palette)
- For a different height of the luminaire

Terms of sale and other information, after contact with the Sales Department of Norlys

Inrush current	8A / 10µs
BUG rating	B0-U3-G1

Accessories sold separately

3086GA0009	Mounting adapter
3080GA0009	Mounting adapter
205ZX0010	Concreting anchor
206GA0010	Ground anchor
206GA0S10	Adapter for concrete foundation

Norlys AS
P.B 1014 Hoff, 0218
Oslo
Hovfaret 4B, 0275
Oslo
Norway
+47 24 12 40 11
firmapost@norlys.no

TÜVRheinland CERTIFIED — Management System ISO 9001:2015 IATF 16949:2016 — www.tuv.com ID 9108651873

PCC Cert CERTIFICATE ISO 14001

RoHS 2011/65/UE

Before the installation, read the instructions attached to the luminaire. Due to the dynamic development of lighting technology, we provide additional information at the client's request. Condensation, which may occur in luminaires, is a natural phenomenon and does not deteriorate the quality of the luminaire

HALMSTAD 1489



Halmstad
1489XX0013
14.10.2026 v.13.14
www.norlys.no

Spare parts

ZS1489zx0013	Repair kit.

Files to download

Photometric LDT files	Photometric IES files
Manual	BIM ArchiCAD

Indexes

Index	Color	RAL
1489GR	GRAPHITE	7016

Other colors according to the "Colors Template" / RAL pattern book - available on request, subject to agreement with Norlys' Sales Department.

Norlys AS
P.B 1014 Hoff, 0218
Oslo
Hovfaret 4B, 0275
Oslo
Norway
+47 24 12 40 11
firmapost@norlys.no

Management System ISO 9001:2015 IATF 16949:2016
TÜVRheinland CERTIFIED
www.tuv.com ID 9108651873
PCC Cert CERTIFICATE ISO 14001
RoHS 2011/65/UE

Before the installation, read the instructions attached to the luminaire. Due to the dynamic development of lighting technology, we provide additional information at the client's request. Condensation, which may occur in luminaires, is a natural phenomenon and does not deteriorate the quality of the luminaire