
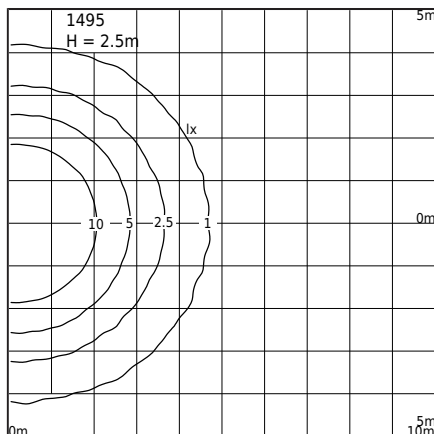
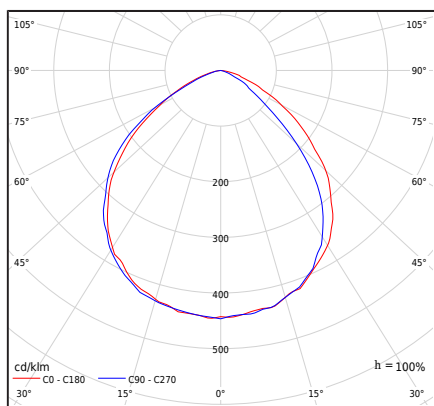


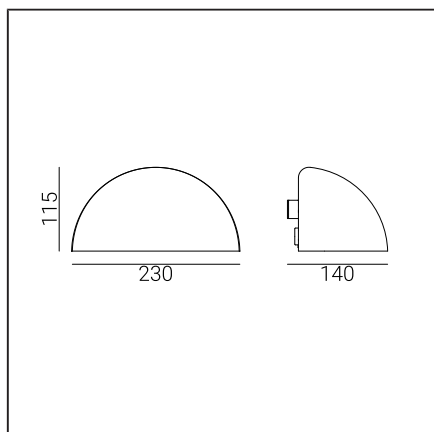

Type of luminaire

Type of luminaire	Wall light,
Photometric body	Diffuse downward-directed hemispherical light
Characteristics of the luminaire	Classic design luminaire with a wide range of applications for example for illumination of walls and facade surfaces or any other architectural concepts.

General information

Materials	Hot-dip galvanized steel. Powder painted steel. Lens - satin polycarbonate, UV stabilized . EPDM cable gland.
Mounting method	Fixing of the luminaire: 2 oval holes 5x10mm, spacing 90mm.
Terminal	Connection terminals: max 3x2,5mm ² , possibility to connect luminaire in loop max 3x1,5mm ² . A round wire in the isolation with a diameter of ø7...10,5mm.
Type of light source	LED module, electronic power supply
Light control	Trailing edge (TE) dimming
Net / gross weight of luminaire	0,79kg / 0,94kg
Box dimensions [cm]	23,5cm x 12cm x 13cm

Technical data

Driver durability	50000h
Luminaire wattage	5,2W
Luminaire luminous flux	430lm
Efficiency of the luminaire	82,7lm/W
ULOR	0%
Color temperature	3000K
Colour consistency (McAdam ellipse)	SDCM3
Colour rendering index CRI	80
Rated life time L70/B50 at 25°C	>70 000h
LED photobiological threat	RG0 or RG1
Power Factor luminaire	PF > 0,9
Ta Rated temperature	+25°C
Ambient temperature	Ta max=+65°C
Inrush current	1A/15,2µs
BUG rating	B0-U1-G0

Maximum number of luminaires of this type per MCB:

B 10A: 157, B 16A: 250, C 10A: 260, C 16A: 425

Spare parts

06160001	Lampshade.
46999609	LED module.
46999746	Power supply.
ZS1495zx0012	Service set.

Files to download

Photometric LDT files	Photometric IES files
Manual	

Indexes

Index	Color	RAL
1495BL	BLACK	9005
1495GA	HOT-DIP GALVANIZING	-
1495WH	WHITE	9003