


NORLYS ASKER 1510


IP 65 | IK 08 | LED | DIM

Asker 1510XX0017
13.10.2026 v.17.3
www.norlys.no

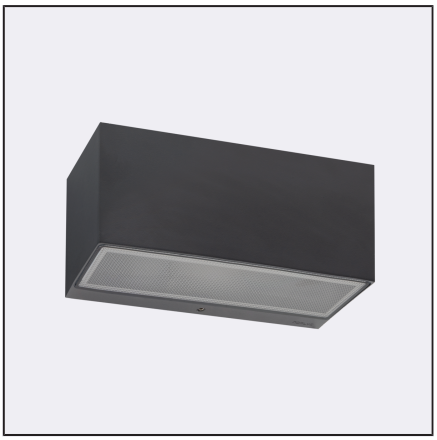

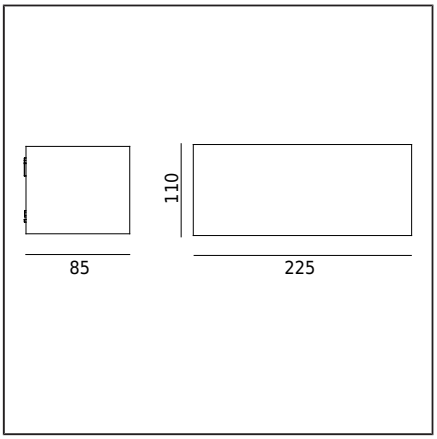

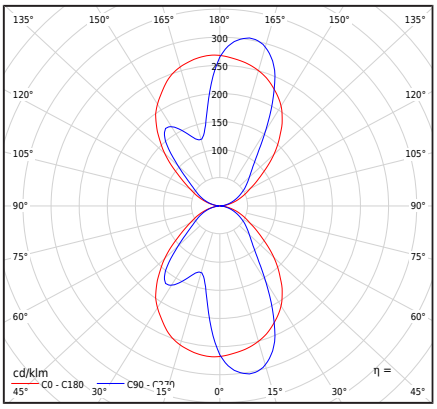

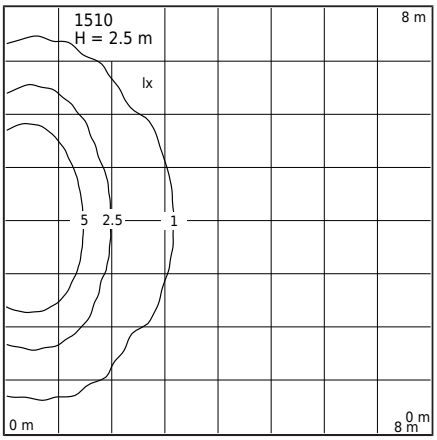

Type of luminaire

Type of luminaire	Wall light,
Photometric body	Double-sided light: directed up and down.
Characteristics of the luminaire	A luminaire with a wide range of applications, including illumination of wall surfaces, facades, and other architectural concepts.

General information

Materials	Powder painted aluminum cast. Lens - transparent polycarbonate with structure, UV stabilized. Silicone gasket. EPDM cable gland.
Mounting method	Fixture mounting: 2 holes ø5mm spacing 180x60mm
Terminal	Terminal clamps: max 3x2.5mm², possibility of looping the fixture connection max 3x1.5mm². Cable in a round sheath with a diameter of ø7...10.5mm.
Type of light source	LED module AC integrated Replaceable (LED only) light source by a professional.
Light control	Phase-dimming (TRIAC) TRAILING EDGE (TE) - LEADING EDGE (LE)
Luminaire weight net / gross	1,34kg / 1,47kg
Box dimensions [cm]	24,5cm x 12,5cm x 10,5cm
Luminaire dimensions [cm]	22,5cm x 11cm x 8,5cm

Technical data

LED module	Lumens EDC 57C 8W xxx 230V F201 3K (Datasheet)
External control	Phase dimmer Lumens LED AC (User manual)
Light source wattage	8,8W
Luminaire wattage	8,8W
Lamp luminous flux	840lm
Luminaire luminous flux	312lm
Efficiency of the luminaire	35,5lm/W
ULOR	50%
Color temperature	3000K
Colour consistency (McAdam ellipse)	SDCM3
Colour rendering index CRI	80
L70TM-21 [wg LM-80]	>55 000h
LED photobiological threat	RG0 or RG1
Power Factor luminaire	PF 0,95
Ta Rated temperature	+25°C
Ambient operating temp. range	-20...+45°C
This product contains light source of energy efficiency class F / EPREL	
Inrush current	35mA / 60ms
BUG rating	B0-U3-G0

Maximum number of luminaires of this type per MCB:

B 10A: 158, B 16A: 250, C 10A: 260, C 16A: 425

Spare parts

ZS1510zx0016	Service set.

Files to download

Photometric LDT files	Photometric IES files
Manual	BIM Revit
BIM ArchiCAD	

Norlys AS
P.B 1014 Hoff, 0218
Oslo
Hovfaret 4B, 0275
Oslo
Norway
+47 24 12 40 11
firmapost@norlys.no

TÜVRheinland CERTIFIED — Management System ISO 9001:2015 IATF 16949:2016 — www.tuv.com ID 9108651873

PCC Cert CERTIFICATE ISO 14001

RoHS 2011/65/UE

Before starting the assembly, refer to the instructions attached to the fixture. Due to the rapid development of lighting technology, we provide additional information at the customer's request. Condensation that may occur in fixtures is a natural phenomenon and does not affect the deterioration of the fixture's quality.

ASKER 1510



Indexes

Index	Color	RAL
1510AL	ALUMINUM	9006
1510BL	BLACK	9005
1510CG	CEMENT GREY	7033
1510CB	COPPER BROWN	8004
1510CS	CORTEN STEEL	approx. 8011
1510GR	GRAPHITE	7016
1510GB	GREY BEIGE	7006
1510GA	HOT-DIP GALVANIZING	-
1510WH	WHITE	9003

Other colors according to the "Colors Template" / RAL pattern book - available on request, subject to agreement with Norlys' Sales Department.

Norlys AS
P.B 1014 Hoff, 0218
Oslo
Hovfaret 4B, 0275
Oslo
Norway
+47 24 12 40 11
firmapost@norlys.no

TÜVRheinland CERTIFIED
Management System ISO 9001:2015 IATF 16949:2016
www.tuv.com ID 9108651873

PCC Cert CERTIFICATE ISO 14001

RoHS 2011/65/UE

Before starting the assembly, refer to the instructions attached to the fixture. Due to the rapid development of lighting technology, we provide additional information at the customer's request. Condensation that may occur in fixtures is a natural phenomenon and does not affect the deterioration of the fixture's quality.