
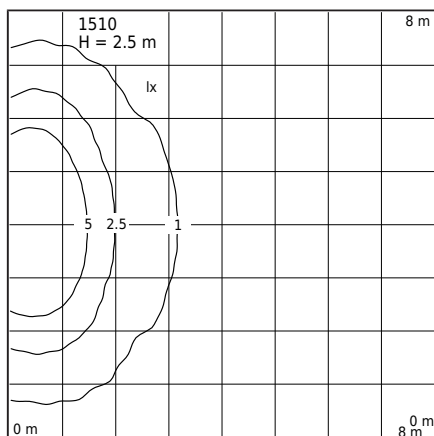
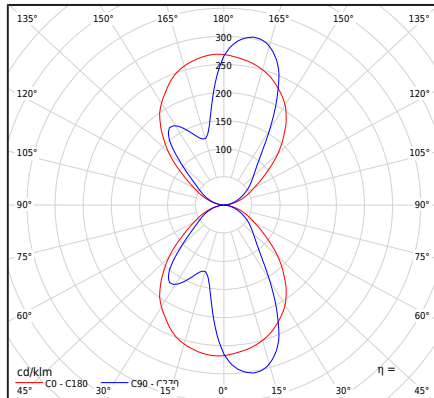
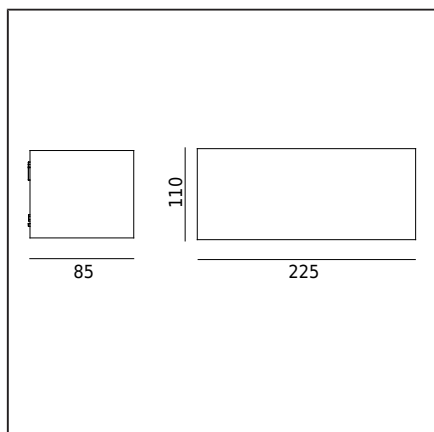


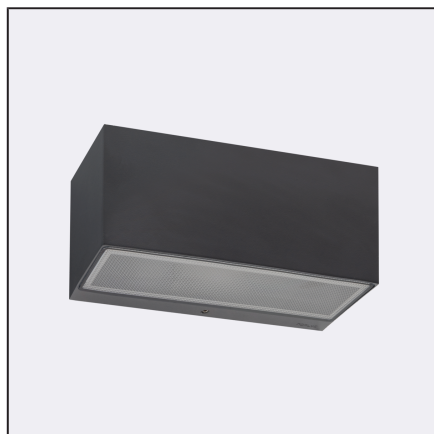

Type of luminaire

Type of luminaire	Wall light,
Photometric body	Double-sided light facing up and down.
Characteristics of the luminaire	Luminaire with a wide range of applications for example for illumination of walls and facade surfaces or any other architectural concepts

General information

Materials	Powder painted aluminum cast. Lens - transparent polycarbonate with structure, UV stabilized. Silicone gasket. EPDM cable gland.
Mounting method	Mounting of the luminaire: 2 holes $\varnothing 4,5\text{mm}$, spacing 180x60mm
Terminal	Connection terminals: max 3x2,5mm ² , Possibility to connect luminaire in loop max 3x1,5mm ² , Round insulated cable with a diameter of $\varnothing 7...10,5\text{mm}$
Type of light source	LED module AC integrated Replaceable (LED only) light source by a professional.
Light control	Phase-dimming (TRIAC) TRAILING EDGE (TE) - LEADING EDGE (LE)
Net / gross weight of luminaire	1,34kg / 1,47kg
Box dimensions [cm]	24,5cm x 12,5cm x 10,5cm

Technical data

External control	Phase dimmer Lumens LED AC (User manual)
Luminaire wattage	8,8W
Luminaire luminous flux	312lm
Efficiency of the luminaire	35,5lm/W
Color temperature	3000K
Colour consistency (McAdam ellipse)	SDCM3
Colour rendering index CRI	80
Rated life time L70/B50 at 25°C	50 000h
LED photobiological threat	RG0 or RG1
Power Factor luminaire	PF 0,95
THD factor	30 %
Ta Rated temperature	+25°C, up to +50°C on request
Ambient temperature	Ta max=+65°C

This product contains light source of energy efficiency class **F** / **EPREL**

Inrush current	40mA / 60ms
BUG rating	B0-U3-G0

Spare parts

ZS1510zx0016	Service set.
--------------	--------------

Files to download

Photometric LDT files	Photometric IES files
Manual	BIM Revit
BIM ArchiCAD	

Indexes

Index	Color	RAL
1510AL	ALUMINUM	9006
1510BL	BLACK	9005
1510GR	GRAPHITE	7016
1510WH	WHITE	9003