


NORLYS ASKER 1511


IP 65 | IK 08 | LED | DIM

Asker 1511XX0017
13.10.2026 v.17.5
www.norlys.no

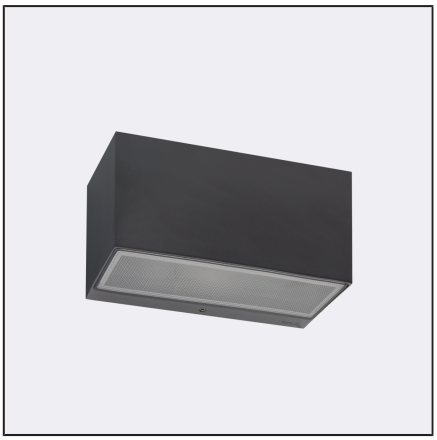

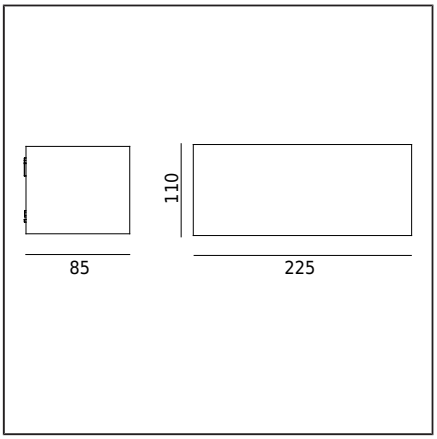

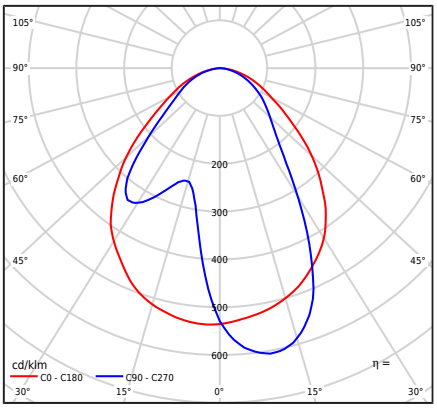

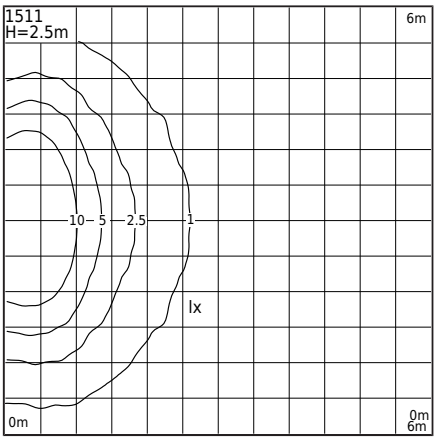

Type of luminaire

Type of luminaire	Wall light,
Photometric body	Diffuse downward-directed hemispherical light
Characteristics of the luminaire	A fixture with a wide range of applications, including for lighting surfaces of walls, facades, and other architectural concepts.

General information

Materials	Powder painted aluminum cast. Lens - transparent polycarbonate with structure, UV stabilized. Silicone gasket. EPDM cable gland.
Mounting method	Mounting the fixture: 2 holes ø4.5mm spacing 180x60mm
Terminal	Terminal connectors: max 3x2.5mm², possibility to connect the fixture in a loop max 3x1.5mm². Cable in a round sheath with a diameter ø7...10.5mm.
Type of light source	LED module AC integrated Replaceable (LED only) light source by a professional.
Light control	Phase-dimming (TRIAC) TRAILING EDGE (TE) - LEADING EDGE (LE)
Luminaire weight net / gross	1,35kg / 1,48kg
Box dimensions [cm]	24,5cm x 12,5cm x 10,5cm

Technical data

LED module	Lumens EDC 57C 8W xxx 230V F201 3K (Datasheet)
External control	Phase dimmer Lumens LED AC (User manual)
Light source wattage	8,8W
Luminaire wattage	8,8W
Lamp luminous flux	840lm
Luminaire luminous flux	156lm
Efficiency of the luminaire	17,7lm/W
ULOR	0%
Color temperature	3000K
Colour consistency (McAdam ellipse)	SDCM3
Colour rendering index CRI	80
L70TM-21 [wg LM-80]	>55 000h
LED photobiological threat	RG0 or RG1
Power Factor luminaire	PF>0,95
Ta Rated temperature	+25°C
Ambient operating temp. range	-20...+45°C
This product contains light source of energy efficiency class F / EPREL	
Inrush current	40mA / 60ms
BUG rating	B0-U0-G0

Spare parts

ZS1511zx0016	Service set.

Files to download

Photometric LDT files	Photometric IES files
Manual	BIM Revit
BIM ArchiCAD	

Indexes

Index	Color	RAL
1511AL	ALUMINUM	9006
1511BL	BLACK	9005
1511GR	GRAPHITE	7016
1511WH	WHITE	9003

Other colors according to the "Colors Template" / RAL pattern book - available on request, subject to agreement with Norlys' Sales Department.

Norlys AS
P.B 1014 Hoff, 0218
Oslo
Hovfaret 4B, 0275
Oslo
Norway
+47 24 12 40 11
firmapost@norlys.no

TÜVRheinland CERTIFIED — Management System ISO 9001:2015 IATF 16949:2016 — www.tuv.com ID 9108651873

PCC Cert CERTIFICATE ISO 14001

RoHS 2011/65/UE

Before starting the assembly, please refer to the instructions included with the fixture. Due to the dynamic development of lighting technology, we provide additional information at the customer's request. Condensation that may occur in fixtures is a natural phenomenon and does not affect the quality of the fixture.