

# NORLYS GRIMSTAD 1544


AC 220-240V 50-60Hz | IP 65 | IK 08 | LED | DIM

Grimstad
1544XX0014
14.10.2026 v.14.11
www.norlys.no

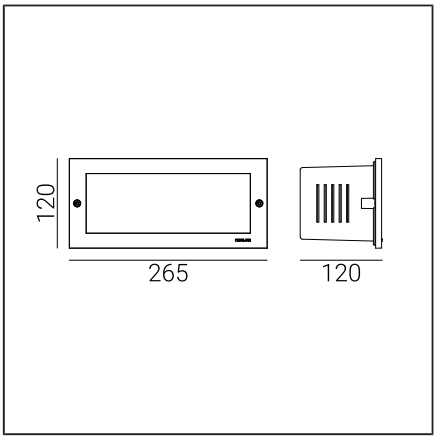

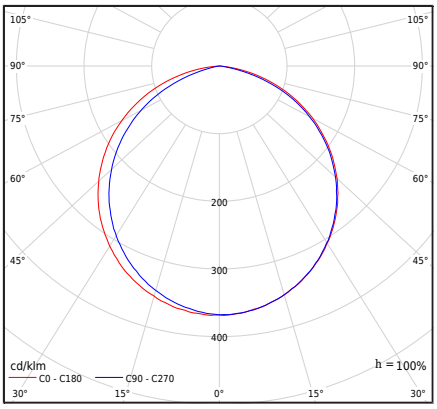


## Type of luminaire
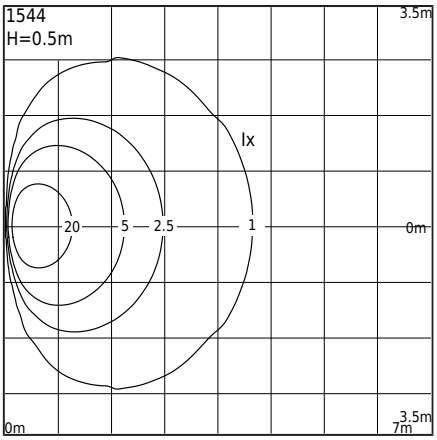
| | |
|---|---|
| Type of luminaire | Recessed wall luminaire. |
| Photometric body | Diffused light. |
| Characteristics of the luminaire | The luminaire is adapted to illuminate stairs, steps, staircases, pathways, and other places |

## General information

| | |
|---|---|
| Materials | Powder painted aluminum cast. Lens - safety glass, milky colour. Silicone gasket. EPDM cable gland. |
| Mounting method | Mounting of the luminaire: embedded in the wall - hole 258x112x115, munting in a layered wall - hole 235x96x82 |
| Terminal | Connection terminals: max 3x2.5mm²,<br>Possibility to connect the luminaire in loops, max 3x1.5mm²,<br>Round insulated cable with a diameter of ø7 ... 10.5mm |
| Type of light source | LED module, electronic power supply<br>Replaceable (LED only) light source by a professional.<br>Replaceable control gear by a professional. |
| Light control | Trailing edge (TE) dimming |
| Luminaire weight net / gross | 1,41kg / 1,6kg |
| Box dimensions [cm] | 27cm x 12,5cm x 11,5cm |

## Technical data

| | |
|---|---|
| LED module | Philips Fortimo_LED_Strip_0.5ft_MF_8xx_HV6 3K (Datasheet) |
| Driver | Yes |
| Driver durability | 50000h |
| Light source wattage | 3,9W |
| Luminaire wattage | 5,3W |
| Lamp luminous flux | 653lm |
| Luminaire luminous flux | 214lm |
| Efficiency of the luminaire | 40,4lm/W |
| ULOR | 0% |
| Color temperature | 3000K |
| Colour consistency (McAdam ellipse) | SDCM3 |
| Colour rendering index CRI | 80 |
| L80B20 [wg LM-80] | >72 000h |
| L90B10 [wg LM-80] | >64 000h |
| LED photobiological threat | RG0 or RG1 |
| Power Factor luminaire | PF > 0,9 |
| THD factor | < 20% |
| Ta Rated temperature | +25°C |
| Ambient operating temp. range | -20...+45°C |

This product contains light source of energy efficiency class C / EPREL

| | |
|---|---|
| Inrush current | 1A/15,2µs |
| BUG rating | B0-U1-G0 |

## Spare parts

| | |
|---|---|
| ZS1544zx0014 | Repair kit. |

## Files to download

| | |
|---|---|
| Photometric LDT files | Photometric IES files |
| Manual | |

## Indexes

| Index | Color | RAL |
|---|---|---|
| 1544AL | ALUMINUM | 9006 |
| 1544GR | GRAPHITE | 7016 |

Other colors according to the "Colors Template" / RAL pattern book - available on request, subject to agreement with Norlys' Sales Department.

Norlys AS
P.B 1014 Hoff, 0218
Oslo
Hovfaret 4B, 0275
Oslo
Norway
+47 24 12 40 11
firmapost@norlys.no

TÜVRheinland CERTIFIED — Management System ISO 9001:2015 IATF 16949:2016 — www.tuv.com ID 9108651873

PCC Cert CERTIFICATE ISO 14001

RoHS 2011/65/UE

Before the installation, read the instructions attached to the luminaire. Due to the dynamic development of lighting technology, we provide additional information at the client's request. LED module replaceable by a person with appropriate qualifications, following applicable regulations. Condensation, which may occur in luminaires, is a natural phenomenon and does not deteriorate the quality of the luminaire